Revisions.

No.	Revision.	Date.	By.

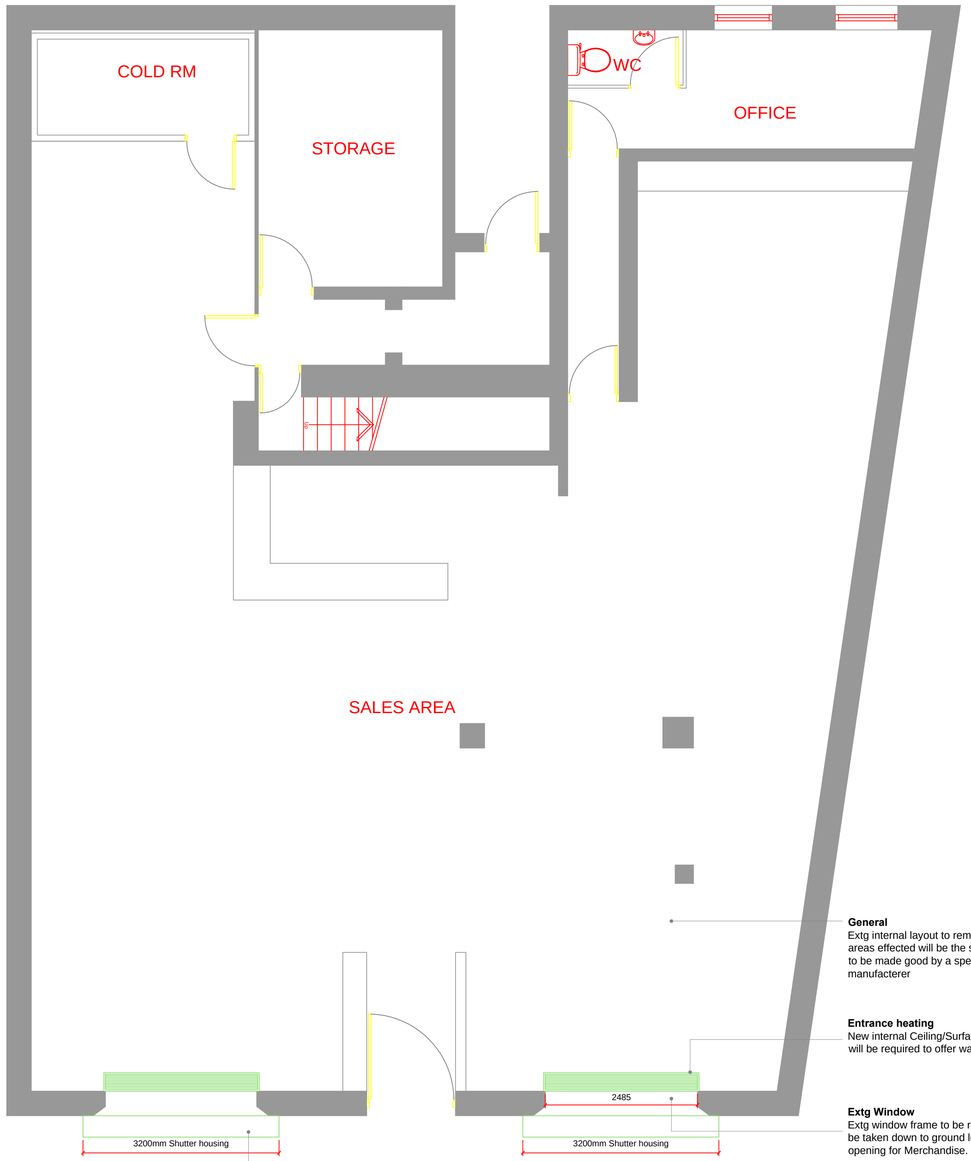

General
Extg internal layout to remain un-affected. areas effected will be the shopfront Windows to be made good by a specialist Shutter manufacterer

Entrance heating
New internal Ceiling/Surface mounted heater will be required to offer warmth to the store

Extg Window
Extg window frame to be removed and cill to be taken down to ground level to act as new opening for Merchandise.

Shutter Box
Shutter box to be fitted to front face of the window openings to be look consistent with Extg door Shutter box

New galavanised perferated roller shutter has been incased internally above Extg Window opening. shutter to roll down and cover the whole frontage of shop
(as illustrated on Shopfront elevation)



PROPOSED SHOPFRONT ELEVATION

Extg Window
Extg window frame to be removed and cill be taken down to ground level to act as ne opening for Merchandise.

Shutter to only appear this way once the store is closed. during opening hours both set s of shutters will remain fully open

1:50 SCALE BAR



Project
375 Moston Lane
Moston, Mancs, M40 9NB

Title
Proposed Floor plan & Elevations
GA

Scale	Date	Job No	Original
1:50@A1	30.09.13	0000	
Drawn By	Checked		
WBK			
Category	CISfb Element	Sequential No	Revision
P		002	/