HARRIER

Features:

- Slim wall pack
- IP66 (dust tight & strong water jet proof)
- IK08 (5 joules) shock resistance
- High performance energy efficient surface-mount-device (SMD) LEDs
- High quality European branded integral driver
- Two sizes available:
  - Mini
  - Midi
- 4000K (cool white) as standard
- CRI 70
- Average 100,000 hours LED life - L80 B10
- Zero upward light output (0% ULOR)
- 20mm conduit entries for through wiring

Options:

- Integral 3 hour maintained emergency (available in midi version only)
- Integral photocell
- 3000K and 5000K colour temperatures available - on special request
- CRI 80 version available - on special request

Material:

- Body: die-cast aluminium
- Optic: polycarbonate

Finish:

- Body: powder coated
- Optic: clear

Colours:

02 Black
03 Metallic Grey

Beam Angles:

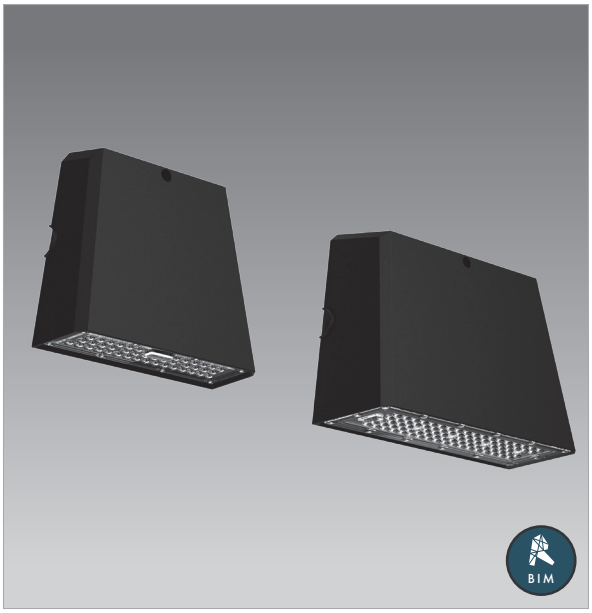

Technical Drawings



Harrier Mini



Harrier Midi

Photometrics





IP66 IK08 3000K 4000K 5000K CRI 70 CRI 80 RIC

Harrier Mini						Ordering Code	
Wattage	Colour Temperature	Delivered Lumens	Luminous Efficacy	Emergency Lumens	Weight (Kg)	Black	Metallic Grey
10W LED	4000K	1593lm	159lm/W	-	2.8	65-271-270-402	65-271-270-403
20W LED	4000K	2899lm	145lm/W	-	2.8	65-272-270-402	65-272-270-403
30W LED	4000K	3791lm	126lm/W	-	2.8	65-273-270-402	65-273-270-403
Harrier Midi							
20W LED	4000K	2982lm	149lm/W	345lm	3.8	65-271-470-402	65-271-470-403
30W LED	4000K	4224lm	141lm/W	345lm	3.8	65-272-470-402	65-272-470-403
40W LED	4000K	5402lm	135lm/W	345lm	3.8	65-273-470-402	65-273-470-403
70W LED	4000K	8972lm	128lm/W	345lm	3.8	65-273-470-402	65-273-470-403

Options	Ordering Code
Emergency (3 hour) (midi version only)	E3-
Integral photocell	/P