

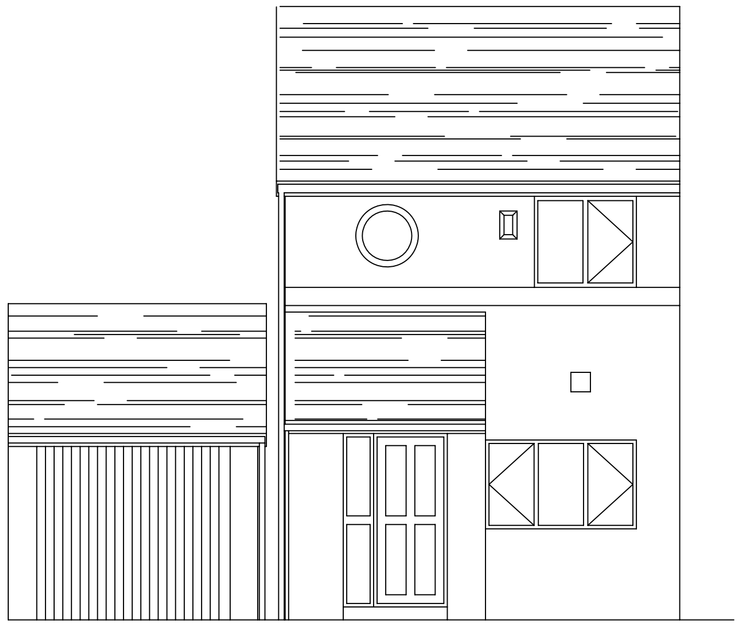



Exist. Front Elevation

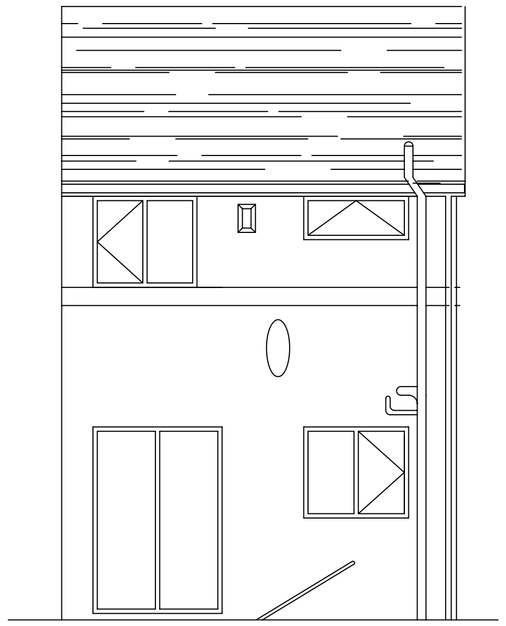


Exist. Rear Elevation

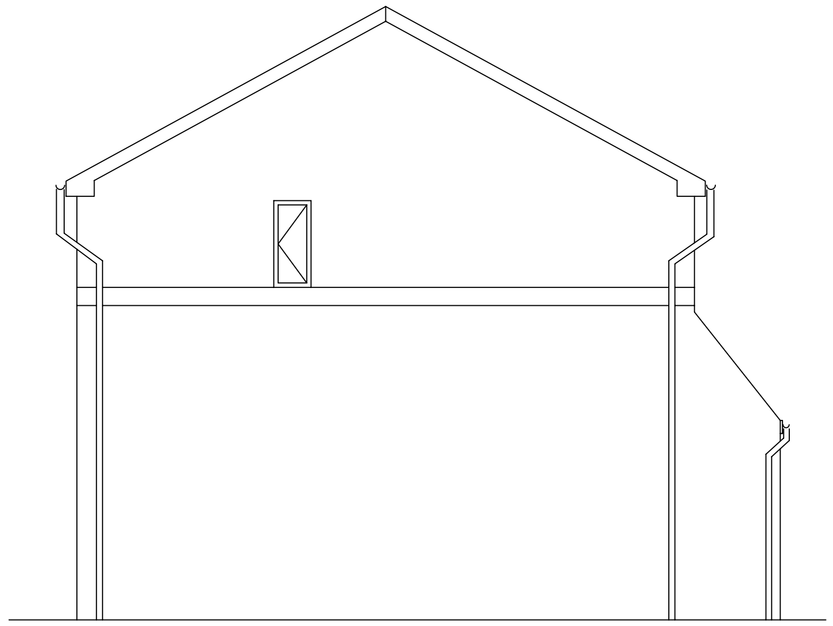


Exist. South Side Elevation

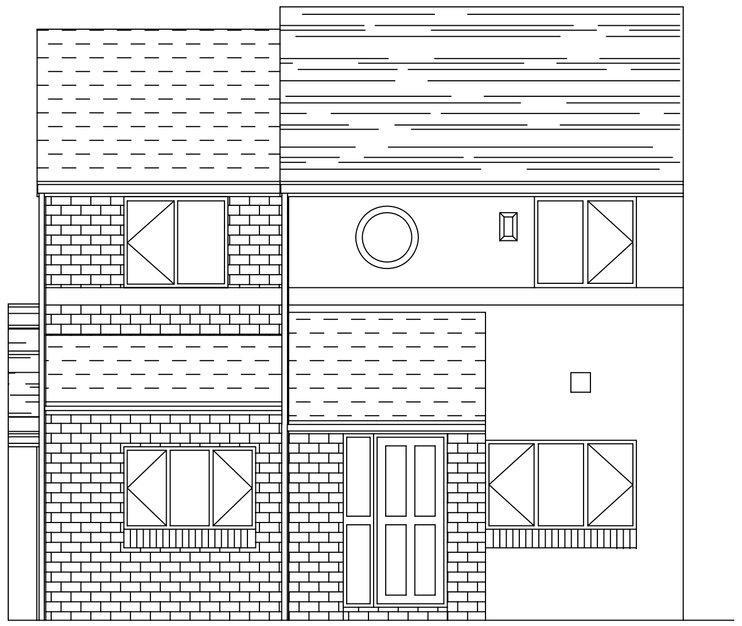


Proposed Front Elevation

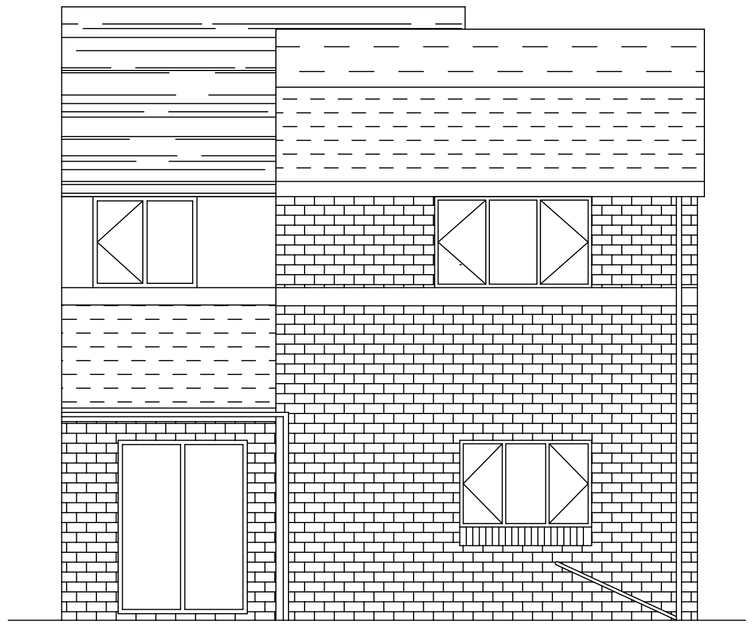

Proposed Rear Elevation

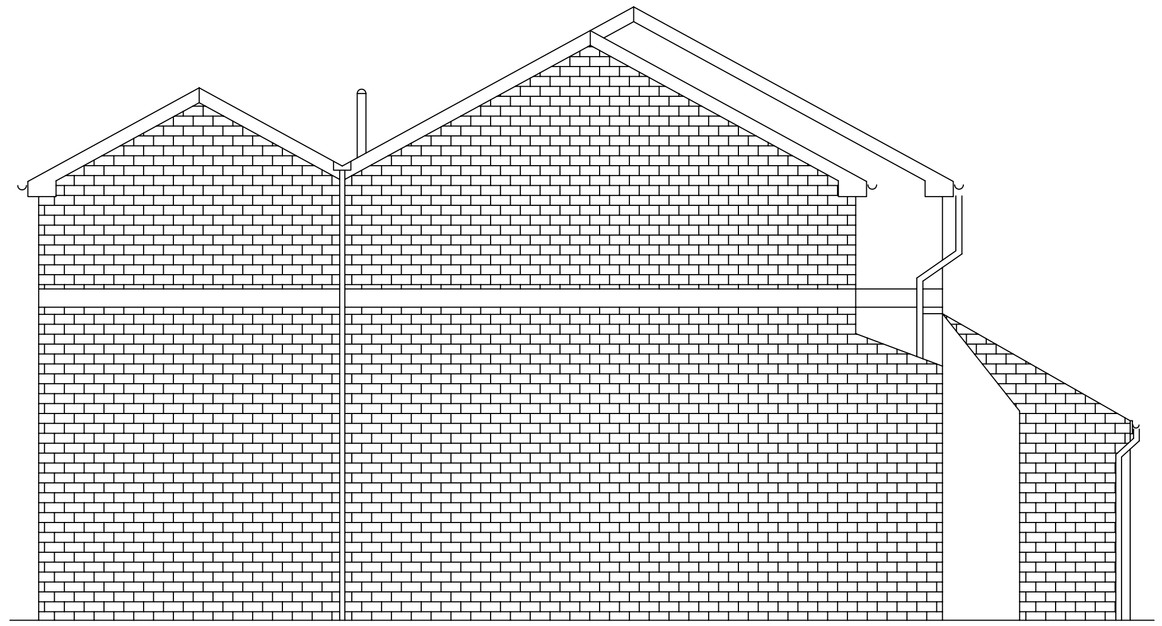

Proposed South Side Elevation

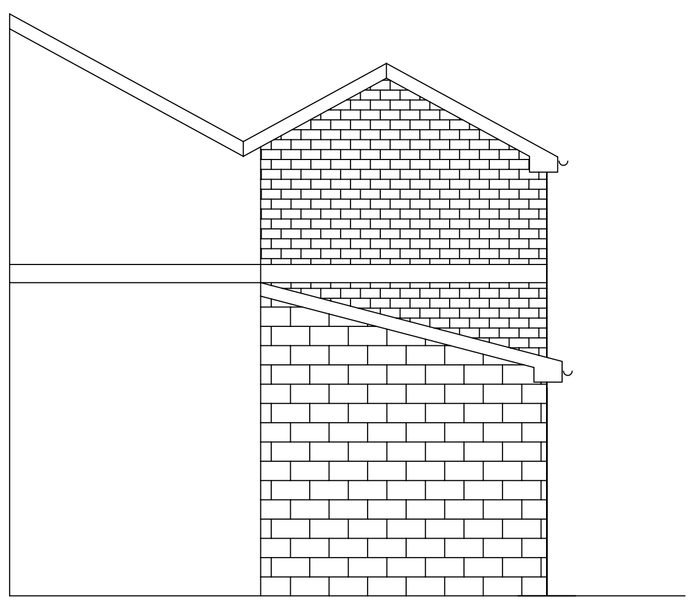

Proposed North Side Elevation

NOTES

Notes continued from Sheet 1 of 2

24. All electrical work to be undertaken by a competent person and a completion certificate must be produced to the Local Authority Building Inspector.
25. All gas works to ne undertaken by a trained person on "Safe Gas Register".
26. All new heating appliance to be fitted with independent thermostatic control valves.
27. Internal partition walls to be constructed of 50x75mm timber frame with 12.5mm plasterboard on both sides to be skimmed. 75mm thick insulation to be inserted in the timber frame between the plasterboards.
28. Where proposed timber partition wall run parallel to the floor joists, it should be supportd on double joists (bolted together).
29. All exposed steelwork to be protected by two layers of 12.5mm plasterboard, to be plastered & skimmed to achieve 30 minutes fire resistance.

No	DATE	DRAWN	REV'D ENG.	AMENDMENT
P1	23.12.13	AUH		Proposed elevations amended

CLIENT: Mr. A. Mahmood

PROJECT: 8 - Sarnesfield Close, Manchester M12 4PZ.

DRAWN: A. Ul-Haq | CHECKED:

TITLE: Proposed Drainage of Front Concreted Drive and Two Storey Side & Two Storey Part Rear Extension. Elevations (Sheet 3 of 4).

SCALE	DRAWING No.	DATE	AMDT
1:100	2013/07/03	July 2013	P1

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 cm

FULL SIZE ON ORIGINAL

A1