

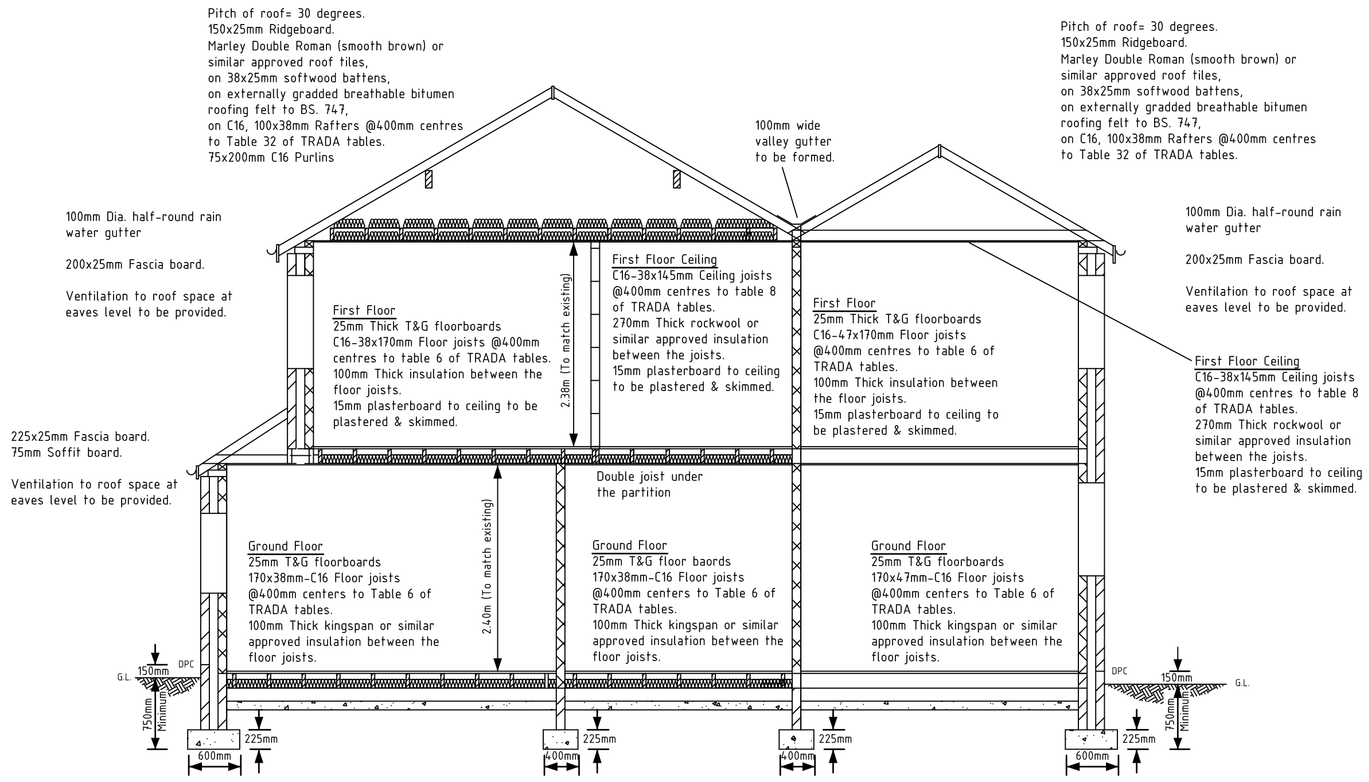


Brickwork to inner leaf to ground level only.
Lean mix concrete infill to cavity to ground level only.
Ends of joists to be wrapped in DPM when inserted into wall.
A minimum of 150mm gap between the underside of the joists and site concrete.
100mm Thick site concrete.
1200 Gauge DPM below site concrete.


Section A - A

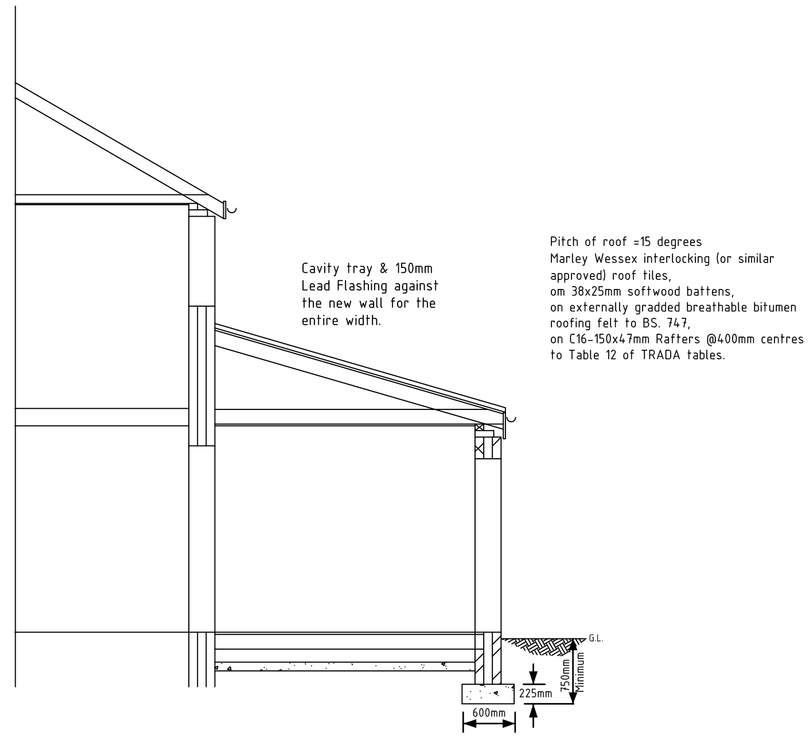

Section B - B

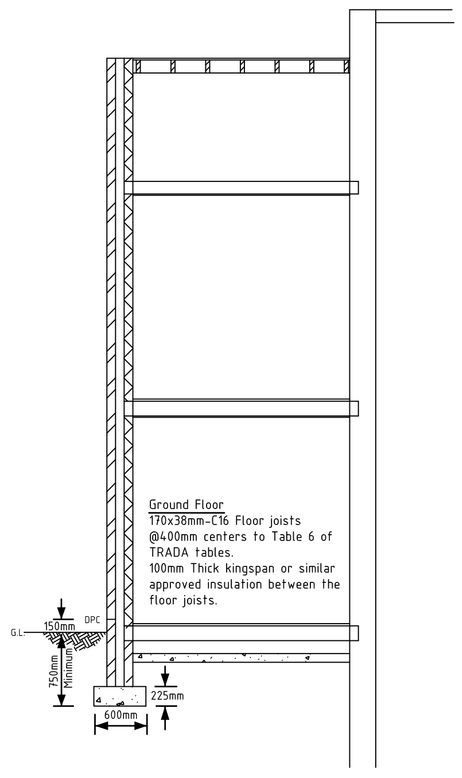

Section C - C

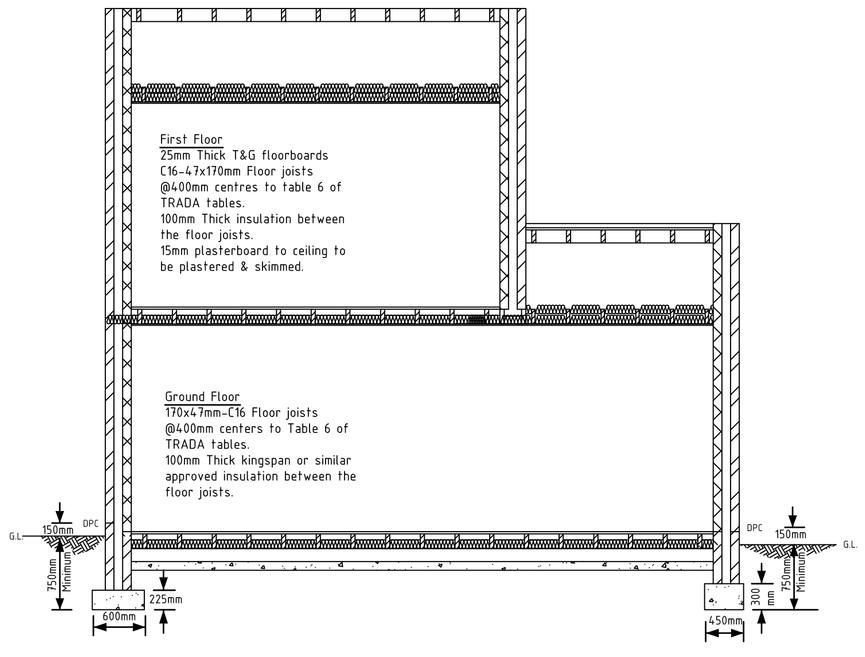

Section D - D

NOTES

No	DATE	DRAWN	REV'D ENG.	AMENDMENT
P1				

CLIENT: Mr. A. Mahmood

PROJECT: 8 - Sarnesfield Close, Manchester M12 4PZ.

DRAWN: A. Ul-Haq | CHECKED:

TITLE: Proposed Drainage of Front Concreted Drive and Two Storey Side & Rear Extension. Sections (Sheet 4 of 4).

SCALE	DRAWING No	DATE	AMDT
1:50	2013/07/04	July 2013	

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 cm

FULL SIZE ON ORIGINAL

A1