



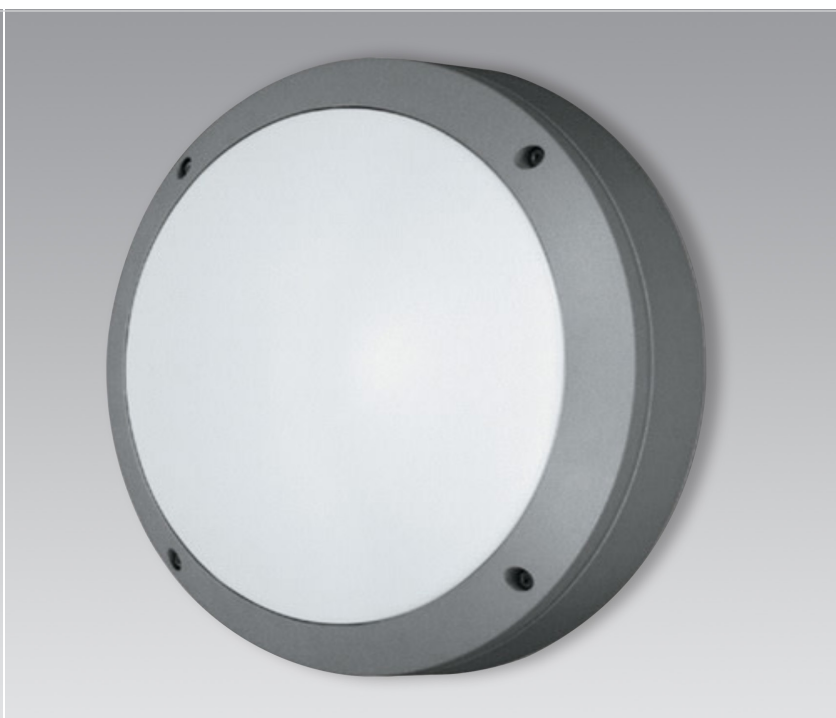

- Forge Mini ceiling/wall mounted luminaire
- Die-cast aluminium Body available in black RAL 9005, white RAL9010, silver RAL9006 and anthracite RAL7016
- Tridonic CLE LED module & fixed output driver
- UV stabilized polycarbonate diffuser
- Stainless steel screws, silicone gasket
- Protection class IP 65
- Dust-tight and protection against water jets
- Impact strength IK10
- Impacts < 20 joule

Options

- DALI, 3 hour integral emergency
- Integral microwave sensor
- LED colour temperature 3000K
- Conforms to BS4533 EN60598 **CE**

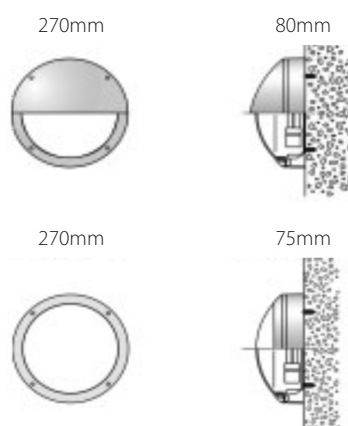

FORGEMINI SPECIFICATION

CAT No	Colour Temp (K)	Colour Rendering (Ra)	Life (hrs)	Luminous Output (lm)	Connected load total watts(tcW)
FXM1284	4000	80	60000	1920	12
FXM1884	4000	80	60000	1920	18

Add suffix to catalogue number:

DD: Dali DSI. **E3:** 3 hour emergency.

ST3 : Self test emergency. **DE3:** Dali emergency. **3000K:** 3k. **4000K:** 4K

B: Black. **W:** White. **A:** Anthracite. **S:** Silver.

MD: Microwave detector. **HO:** Hood. **PC:** Photocell.

Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.