


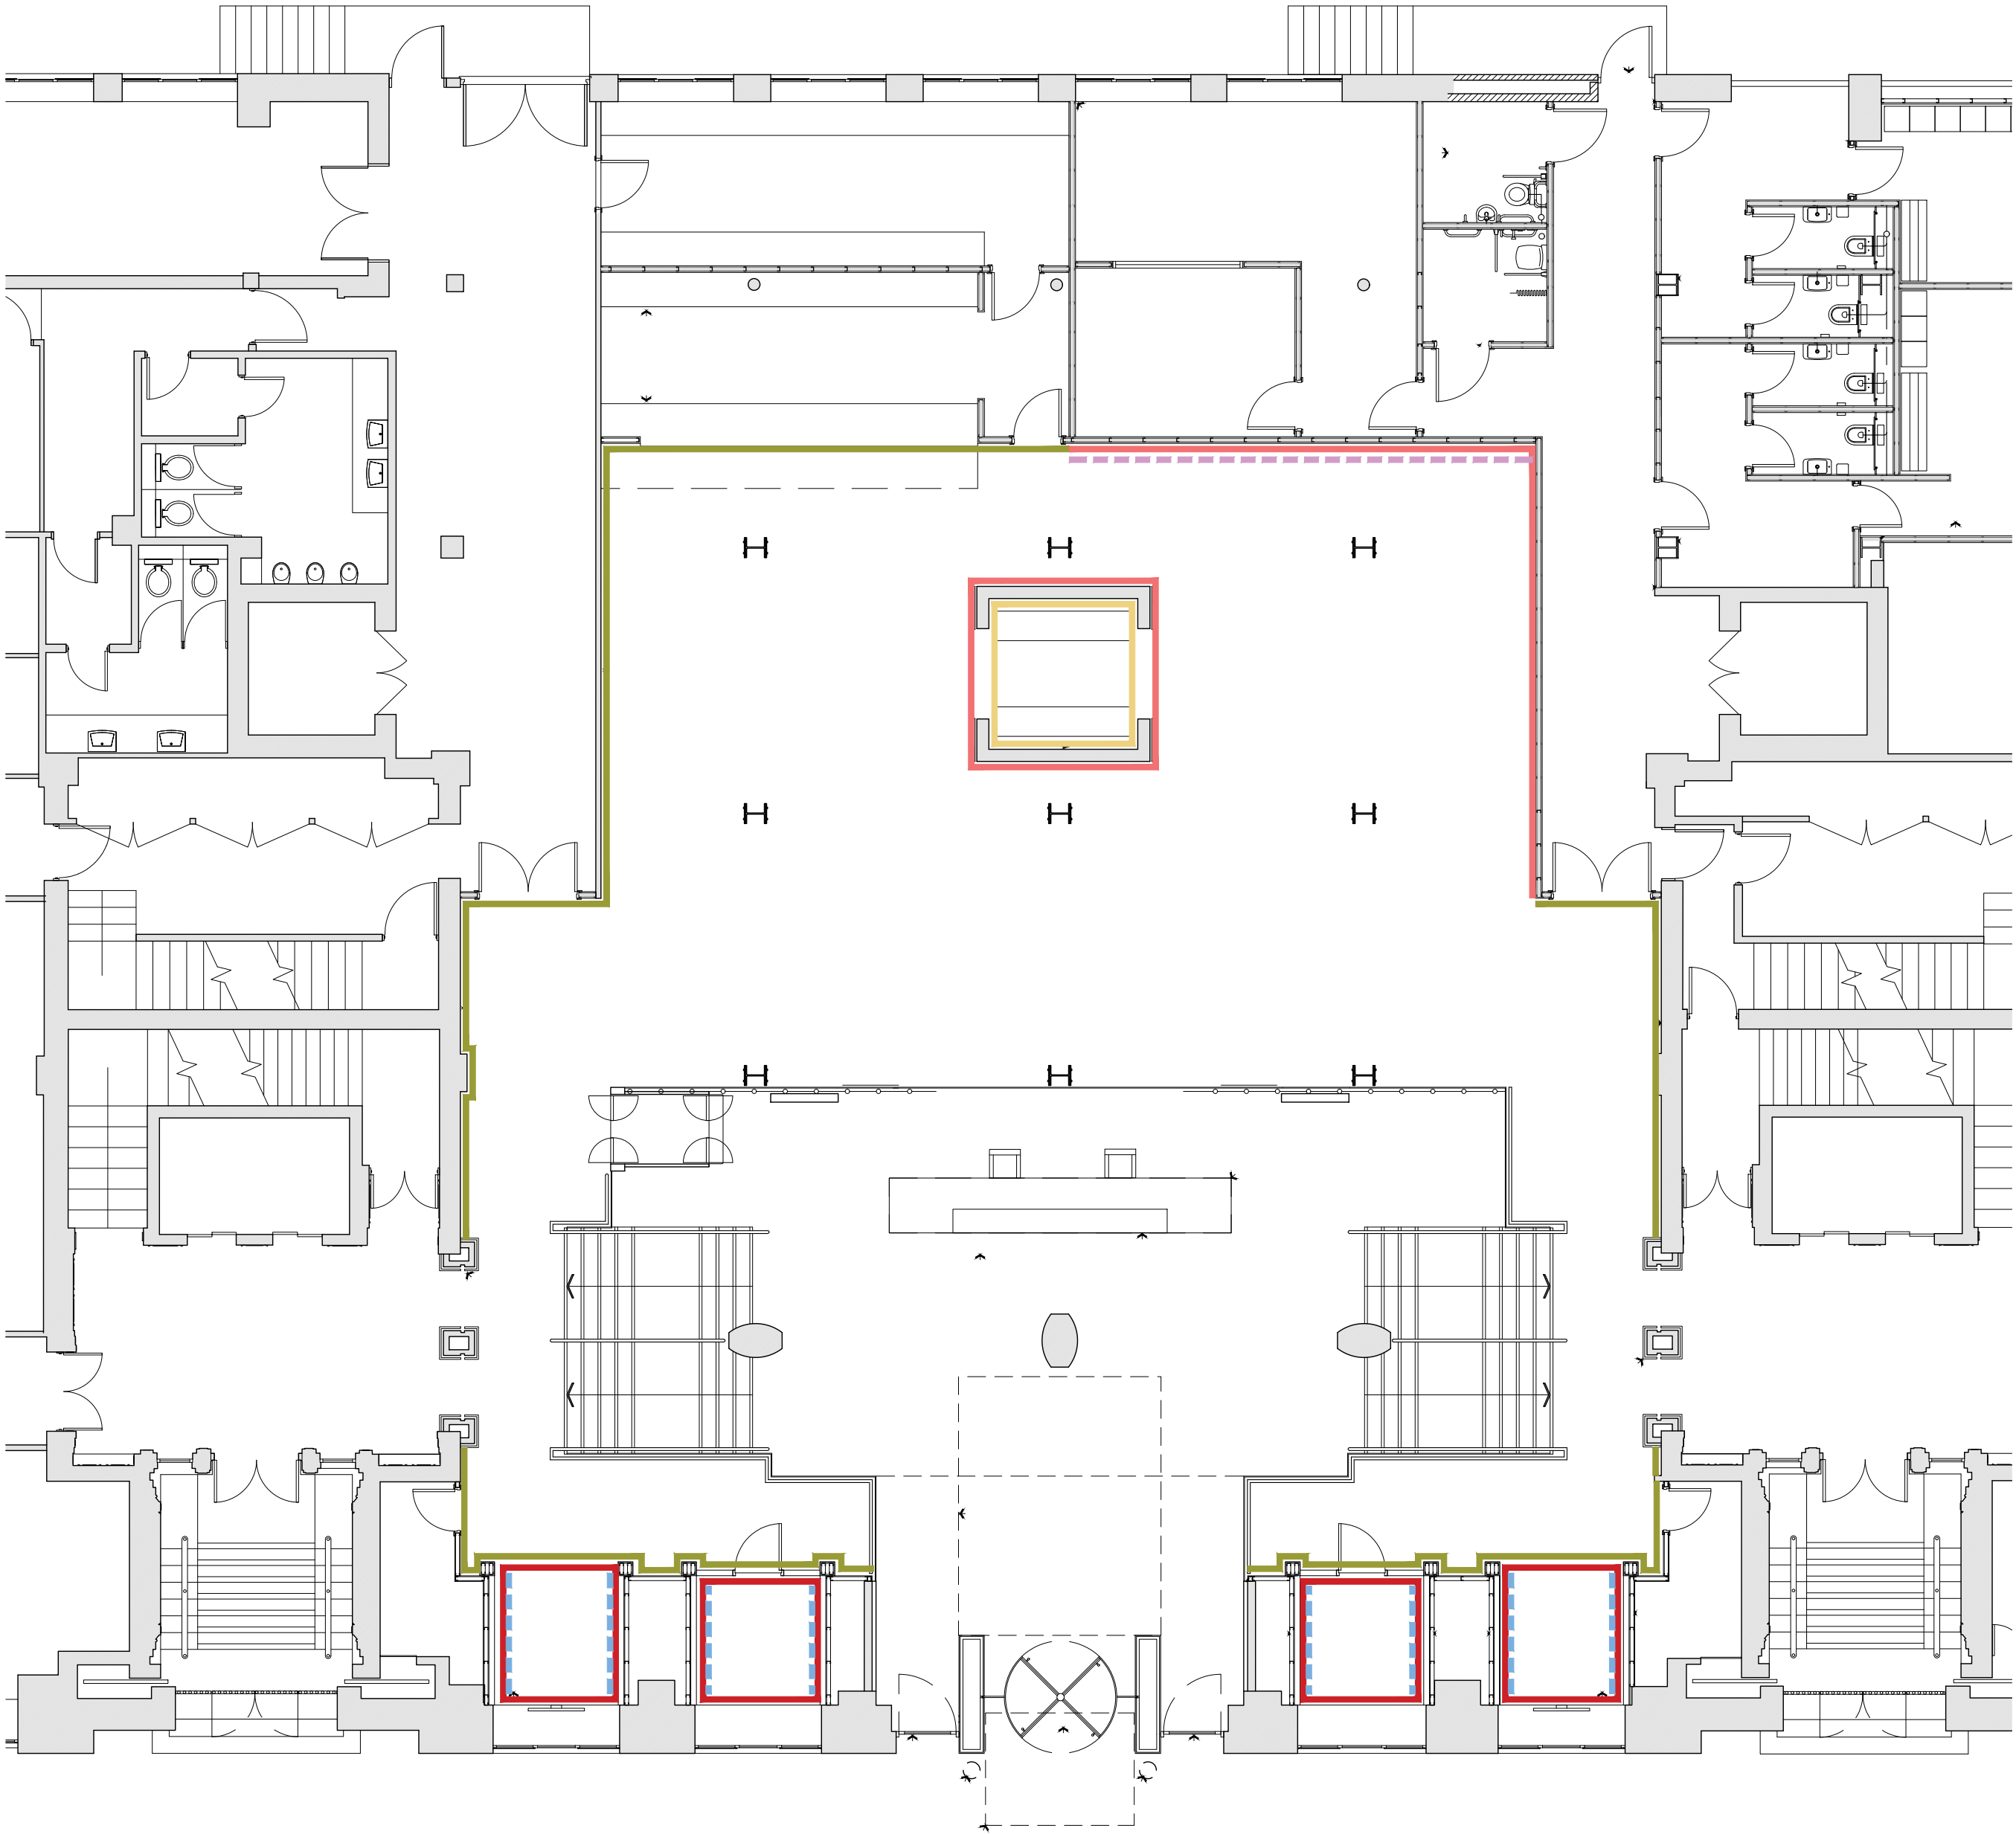

Do not scale off this drawing. All dimensions to be checked on site prior to manufacture and construction. This drawing is the property of The Friday Project and should not be reproduced without permission. All discrepancies to be brought to the attention of the architect immediately. This drawing to be read in conjunction with the specification / bill of quantities and related drawings.

REVISION			
-	FIRST ISSUE	13.07.25	LA
A	MEETING ROOM BOOTH PAINT REFERENCE AMENDED	15.07.25	LA
B	CHAINMAIL CURTAIN ADDED BEHIND RECEPTION AND MURAL IN CAFE	17.07.25	LA
C	PLAN UPDATED	14.08.25	LA

WALL FINISHES KEY	
	W01 - WALL PAINT_CAFE Walls to be prepared for decoration. 2no. mist coats and 1no. full coat in Dulux Heritage Mallard Green Extreme Scrubbable Matt.
	W02 - EXISTING BRICK SLIPS Existing brick slips to be retained and cleaned.
	W03 - WALL PAINT_LIFT SHAFT BOOTH Existing painted brick walls to be prepared for decoration. 2no. mist coats and 1no. full coat in Dulux Heritage Masters Gold Extreme Scrubbable Matt., including the ceiling within the room.
	W04 - MEETING BOOTHS Walls to be prepared for decoration. 2no. mist coats and 1no. full coat in Dulux Heritage Potters Pink Extreme Scrubbable Matt, including ceiling.
	W06 - ARTWORK / ACOUSTIC PANEL Wall to receive either acoustic panel finish (up to 1600mm) and painted finish (above 1600mm). Acoustic spec: Autex Acoustic Groove - Pattern v1. Colour - Opera. OR a collection of curated artwork.
	W07 - CHAINMAIL CURTAIN Two sections of chainmail curtain to be installed in front of mezzanine floor behind reception. Curtain track to be suspended on unistrut and fix to structural soffit. Track to sit under existing services. KrisKadeor Slim Ceiling Techno Suspended Track in RAL 9005 with chain in Brilliant Apricot. Sample to be approved.
	W08 - STENCILLED MURAL Wall to receive decorative mural. Design to be agreed but based on the original building features.
NOTES: - All walls to be prepared for new wall treatments in accordance with manufacturers specific recommendations. - Contractor to make good & redecorate any partitions which may have been damaged as a result of the demolition and fit-out works.	

APAM	client
BRIDGEWATER HOUSE 58-60 WHITWORTH STREET, M1 6LT	project
PROPOSED WALL FINISHES PLAN	title
VBC03	job No.
AL07 / C	dwg No.
1:100 @ A2	scale
LA	drawn

