

Air Quality Assessment
Dinton Street, Manchester

Client: FG Ordsall Lane Limited

Reference: 7356r2

Date: 19th January 2024



Report Issue

Report Title: Air Quality Assessment - Dinton Street, Manchester

Report Reference: 7356

Field	Report Version			
	1	2	3	4
Prepared by	Lauren Casey	Lauren Casey		
Position	Senior Air Quality Consultant	Senior Air Quality Consultant		
Reviewed by	Emily Pears-Ryding	Emily Pears-Ryding		
Position	Associate Director	Associate Director		
Authorised by	Jethro Redmore	Jethro Redmore		
Position	Director	Director		
Date of Issue	21 st December 2023	19 th January 2024		
Comment	Amended site description	-		

Serendipity Labs, Building 7, Exchange Quay, Salford, M5 3EP

info@red-env.co.uk | 0161 706 0075 | www.red-env.co.uk

This report has been prepared by Redmore Environmental Ltd in accordance with the agreed terms and conditions of appointment. Redmore Environmental Ltd cannot accept any responsibility for any use of or reliance on the contents of this report by any third party.

Executive Summary

Redmore Environmental Ltd was commissioned by FG Ordsall Lane Limited to undertake an Air Quality Assessment in support of a residential development on land off Dinton Street, Manchester.

The proposals have the potential to cause air quality impacts as a result of fugitive dust emissions during construction and road traffic exhaust emissions associated with vehicles travelling to and from the site during operation, as well as expose future residents to elevated pollution levels. As such, an Air Quality Assessment was required in order to determine baseline conditions, consider location suitability for the proposed end-use and assess potential effects as a result of the scheme.

Potential construction phase air quality impacts from fugitive dust emissions were assessed as a result of earthworks, construction and trackout activities. It is considered that the use of good practice control measures would provide suitable mitigation for a development of this size and nature and reduce potential impacts to an acceptable level.

Potential impacts during the operational phase of the proposals may occur due to road traffic exhaust emissions associated with vehicles travelling to and from the site. Dispersion modelling was therefore undertaken in order to predict pollutant concentrations at sensitive locations as a result of emissions from the highway network both with and without the development in place. Results were subsequently verified using local monitoring data.

Review of the dispersion modelling results indicated that predicted air quality impacts as a result of traffic generated by the development were not predicted to be significant at any sensitive location in the vicinity of the site.

The results of the assessment also indicated that pollution levels were below the relevant criteria at the proposed development. As such, the site is considered suitable for the proposed use from an air quality perspective.

Based on the assessment results, air quality factors are not considered a constraint to planning consent for the development.

Table of Contents

1.0	INTRODUCTION	1
1.1	Background	1
1.2	Site Location and Context	1
2.0	LEGISLATION AND POLICY	2
2.1	Legislation	2
2.2	Local Air Quality Management	4
2.3	Dust	4
2.4	National Planning Policy	5
2.5	National Planning Practice Guidance	6
2.6	Local Planning Policy	7
3.0	METHODOLOGY	9
3.1	Introduction	9
3.2	Construction Phase Assessment	9
	Step 1 - Screen the Need for an Assessment	10
	Step 2 - Assess the Risk of Dust Impacts	10
	Step 3 - Site Specific Mitigation	15
	Step 4 - Determine Significant Effects	16
3.3	Operational Phase Assessment	16
	Potential Development Impacts	16
	Potential Future Exposure	18
4.0	BASELINE	19
4.1	Introduction	19
4.2	Local Air Quality Management	19
4.3	Air Quality Monitoring	19
4.4	Background Pollutant Concentrations	20
4.5	Sensitive Receptors	21
	Construction Phase Sensitive Receptors	21
	Operational Phase Sensitive Receptors	23
5.0	ASSESSMENT	25
5.1	Introduction	25
5.2	Construction Phase Assessment	25
	Step 1 - Screen the Need for an Assessment	25
	Step 2 - Assess the Risk of Dust Impacts	25
	Step 3 - Site Specific Mitigation	27

Step 4 - Determine Significant Effects	29
5.3 Operational Phase Assessment	30
Potential Development Impacts	30
Potential Future Exposure	37
Overall Impact Significance	38
6.0 MITIGATION	39
7.0 CONCLUSION	41
8.0 ABBREVIATIONS	43

Appendices

Appendix 1 - Assessment Input Data

Appendix 2 - Curricula Vitae

1.0 INTRODUCTION

1.1 Background

1.1.1 Redmore Environmental Ltd was commissioned by FG Ordsall Lane Limited to undertake an Air Quality Assessment in support of a residential development on land off Dinton Street, Manchester.

1.1.2 The development has the potential to cause air quality impacts at sensitive locations during the construction and operational phases, as well as expose future residents to elevated pollution levels. As such, an Air Quality Assessment was undertaken in order to determine baseline conditions, consider site suitability for the proposed end-use and assess potential effects associated with the scheme.

1.2 Site Location and Context

1.2.1 The site is located on land off Dinton Street, Manchester, at approximate National Grid Reference (NGR): 382391, 397028. Reference should be made to Figure 1 for a map of the site and surrounding area.

1.2.2 The proposals comprise erection of a 24-storey mixed use building incorporating 224 residential apartments (Use Class C3), 87 apart-hotel studios (Use Class C1), amenity space, flexible commercial space (Use Class E), and café (Use Class E(b)), together with infrastructure, landscaping, and other associated works.

1.2.3 The proposals have the potential to cause air quality impacts at sensitive locations. These may include fugitive dust emissions associated with construction works and road traffic exhaust emissions from vehicles travelling to and from the development during the operational phase. There is also the potential for exposure of future occupants to any existing air quality issues at the site. An Air Quality Assessment was therefore undertaken in order to determine baseline conditions and consider potential effects as a result of the proposals. This is detailed in the following report.

2.0 **LEGISLATION AND POLICY**

2.1 **Legislation**

2.1.1 The Air Quality Standards Regulations (2010) and subsequent amendments include Air Quality Limit Values (AQLVs) for the following pollutants:

- Nitrogen dioxide (NO₂);
- Sulphur dioxide;
- Lead;
- Particulate matter with an aerodynamic diameter of less than 10µm (PM₁₀);
- Particulate matter with an aerodynamic diameter of less than 2.5µm (PM_{2.5});
- Benzene; and,
- Carbon monoxide.

2.1.2 Air Quality Target Values were also provided for several additional pollutants. It should be noted that the AQLV for PM_{2.5} stated in the Air Quality Standards Regulations (2010) was amended in the Environment (Miscellaneous Amendments) (EU Exit) Regulations (2020).

2.1.3 The Air Quality Strategy (AQS) was produced by the Department for Environment, Food and Rural Affairs (DEFRA) and published on 28th April 2023¹. The document contains standards, objectives and measures for improving ambient air quality, including a number of Air Quality Objectives (AQOs). These are maximum ambient pollutant concentrations that are not to be exceeded either without exception or with a permitted number of exceedences over a specified timescale. These are generally in line with the AQLVs, although the requirements for the determination of compliance vary.

2.1.4 The Environmental Improvement Plan 2023² was published in January 2023, providing long term and Interim Targets in order to reduce population exposure to PM_{2.5}. The concentration target for 2040 was subsequently adopted in the Environmental Targets (Fine Particulate Matter) (England) Regulations (2023).

¹ AQS: Framework for Local Authority Delivery, DEFRA, 2023.

² Environmental Improvement Plan 2023, DEFRA, 2023.

2.1.5 Table 1 presents the AQOs and Interim Target for pollutants considered within this assessment.

Table 1 Air Quality Objectives/Interim Target

Pollutant	Air Quality Objective/Interim Target	
	Concentration ($\mu\text{g}/\text{m}^3$)	Averaging Period
NO ₂	40	Annual mean
	200	1-hour mean, not to be exceeded on more than 18 occasions per annum
PM ₁₀	40	Annual mean
	50	24-hour mean, not to be exceeded on more than 35 occasions per annum
PM _{2.5}	12 ^(a)	Annual mean

Note: (a) Interim Target to be achieved by end of January 2028.

2.1.6 Table 2 summarises the advice provided in DEFRA guidance³ on where the AQOs for pollutants considered within this report apply.

Table 2 Examples of Where the Air Quality Objectives Apply

Averaging Period	Objective Should Apply At	Objective Should Not Apply At
Annual mean	All locations where members of the public might be regularly exposed Building façades of residential properties, schools, hospitals, care homes etc.	Building façades of offices or other places of work where members of the public do not have regular access Hotels, unless people live there as their permanent residence Gardens of residential properties Kerbside sites (as opposed to locations at the building façade), or any other location where public exposure is expected to be short term
24-hour mean	All locations where the annual mean objective would apply, together with hotels Gardens of residential properties	Kerbside sites (as opposed to locations at the building façade), or any other location where public exposure is expected to be short term

³ Local Air Quality Management Technical Guidance (TG22), DEFRA, 2022.

Averaging Period	Objective Should Apply At	Objective Should Not Apply At
1-hour mean	<p>All locations where the annual mean and 24 and 8-hour mean objectives apply. Kerbside sites (for example, pavements of busy shopping streets)</p> <p>Those parts of car parks, bus stations and railway stations etc which are not fully enclosed, where members of the public might reasonably be expected to spend one hour or more</p> <p>Any outdoor locations where members of the public might reasonably be expected to spend one hour or longer</p>	Kerbside sites where the public would not be expected to have regular access

2.2 **Local Air Quality Management**

2.2.1 Local Authorities (LAs) are required to periodically review and assess air quality within their area of jurisdiction under the system of Local Air Quality Management (LAQM). This review and assessment of air quality involves comparing present and likely future pollutant concentrations against the AQOs. If it is predicted that levels at locations of relevant exposure, as summarised in Table 2, are likely to be exceeded, the LA is required to declare an AQMA. For each AQMA the LA is required to produce an Air Quality Action Plan (AQAP), the objective of which is to reduce pollutant concentrations in pursuit of the AQOs.

2.3 **Dust**

2.3.1 The main requirements with respect to dust control from industrial or trade premises not regulated under the Environmental Permitting (England and Wales) Regulations (2016) and subsequent amendments, such as construction sites, is that provided in Section 79 of Part III of the Environmental Protection Act (1990). The Act defines nuisance as:

"any dust, steam, smell or other effluvia arising on industrial, trade or business premises and being prejudicial to health or a nuisance."

2.3.2 Enforcement of the Act, in regard to nuisance, is currently under the jurisdiction of the local Environmental Health Department, whose officers are deemed to provide an independent evaluation of nuisance. If the LA is satisfied that a statutory nuisance exists, or is likely to occur or happen again, it must serve an Abatement Notice under Part III of

the Environmental Protection Act (1990). The only defence is to show that the process to which the nuisance has been attributed and its operation are being controlled according to best practicable means.

2.4 National Planning Policy

2.4.1 The revised National Planning Policy Framework⁴ (NPPF) was published on 19th December 2023 and sets out the Government's planning policies for England and how these are expected to be applied.

2.4.2 The purpose of the planning system is to contribute to the achievement of sustainable development. In order to ensure this, the NPPF recognises three overarching objectives, including the following of relevance to air quality:

"c) an environmental objective - to protect and enhance our natural, built and historic environment; including making effective use of land, improving biodiversity, using natural resources prudently, minimising waste and pollution, and mitigating and adapting to climate change, including moving to a low carbon economy."

2.4.3 Chapter 15 of the NPPF details objectives in relation to conserving and enhancing the natural environment. It states that:

"Planning policies and decisions should contribute to and enhance the natural and local environment by:

[...]

e) preventing new and existing development from contributing to, being put at unacceptable risk from, or being adversely affected by, unacceptable levels of soil, air, water or noise pollution or land instability. Development should, wherever possible, help to improve local environmental conditions such as air and water quality [...]."

⁴ NPPF, Ministry of Housing, Communities and Local Government, 2023.

2.4.4 The NPPF specifically recognises air quality as part of delivering sustainable development and states that:

"Planning policies and decisions should sustain and contribute towards compliance with relevant limit values or national objectives for pollutants, taking into account the presence of Air Quality Management Areas and Clean Air Zones, and the cumulative impacts from individual sites in local areas. Opportunities to improve air quality or mitigate impacts should be identified, such as through traffic and travel management, and green infrastructure provision and enhancement. So far as possible these opportunities should be considered at the plan-making stage, to ensure a strategic approach and limit the need for issues to be reconsidered when determining individual applications. Planning decisions should ensure that any new development in Air Quality Management Areas and Clean Air Zones is consistent with the local air quality action plan."

2.4.5 The implications of the NPPF have been considered throughout this assessment.

2.5 National Planning Practice Guidance

2.5.1 The National Planning Practice Guidance⁵ (NPPG) web-based resource was launched by the Department for Communities and Local Government on 6th March 2014 and updated on 1st November 2019 to support the NPPF and make it more accessible. The air quality pages are summarised under the following headings:

1. What air quality considerations does planning need to address?
2. What is the role of plan-making with regard to air quality?
3. Are air quality concerns relevant to neighbourhood planning?
4. What information is available about air quality?
5. When could air quality considerations be relevant to the development management process?
6. What specific issues may need to be considered when assessing air quality impacts?
7. How detailed does an air quality assessment need to be?
8. How can an impact on air quality be mitigated?

⁵ <https://www.gov.uk/guidance/air-quality--3>.

2.5.2 These were reviewed and the relevant guidance considered as necessary throughout the undertaking of this assessment.

2.6 Local Planning Policy

2.6.1 The Manchester Local Development Framework consists of a series of planning documents of which the Core Strategy Development Plan Document⁶ is central. This was adopted by Manchester City Council (MCC) on 11th July 2012 and provides policies which guide the determination of planning applications within the city.

2.6.2 Review of the document indicated the following policies of relevance to this assessment:

"Policy EN 16

Air Quality

The Council will seek to improve the air quality within Manchester, and particularly within Air Quality Management Areas, located along Manchester's principal traffic routes and at Manchester Airport. Developers will be expected to take measures to minimise and mitigate the local effect of emissions from traffic generated by the development, as well as emissions created by the use of the development itself, including from Combined Heat and Power and biomass plant.

When assessing the appropriateness of locations for new development the Council will consider the effects on air quality, alongside other plan objectives. This includes cumulative effects, particularly in Air Quality Management Areas."

"Policy DM 1

Development Management

All development should have regard to the following specific issues for which more detailed guidance may be given within a supplementary planning document:

⁶ Core Strategy Development Plan Document, MCC, 2012.

[...]

Effects on amenity, including privacy, light, noise, vibration, air quality, odours, litter, vermin, birds, road safety and traffic generation. This could also include proposals which would be sensitive to existing environmental conditions, such as noise."

- 2.6.3 MCC has also produced an 'Air Quality & Planning Technical Guidance' Supplementary Planning Document⁷ (SPD) which provides guidance on assessing the impact of proposed development on air quality.
- 2.6.4 The above policies and SPD were taken into consideration throughout the undertaking of the assessment.

⁷ Air Quality & Planning Technical Guidance, MCC, 2022.

3.0 METHODOLOGY

3.1 Introduction

3.1.1 The proposed development has the potential to cause air quality impacts during the construction and operational phases, as well as expose future site users to elevated pollution levels. These issues have been assessed in accordance with the following methodology.

3.2 Construction Phase Assessment

3.2.1 There is the potential for fugitive dust emissions to occur as a result of construction phase activities. These have been assessed in accordance with the methodology outlined within the Institute of Air Quality Management (IAQM) document 'Guidance on the Assessment of Dust from Demolition and Construction V1.1'⁸.

3.2.2 Activities on the proposed construction site have been divided into three types to reflect their different potential impacts. These are:

- Earthworks;
- Construction; and,
- Trackout.

3.2.3 The potential for dust emissions was assessed for each activity that is likely to take place and considered three separate dust effects:

- Annoyance due to dust soiling;
- Harm to ecological receptors; and,
- The risk of health effects due to a significant increase in exposure to PM₁₀.

3.2.4 The assessment steps are detailed below.

⁸ Guidance on the Assessment of Dust from Demolition and Construction V1.1, IAQM, 2016.

Step 1 - Screen the Need for an Assessment

- 3.2.5 Step 1 screens the requirement for a more detailed assessment. Should human receptors be identified within 350m from the boundary or 50m from the construction vehicle route up to 500m from the site entrance, then the assessment proceeds to Step 2. Additionally, should ecological receptors be identified within 50m of the site or the construction vehicle route up to 500m from the site entrance, then the assessment also proceeds to Step 2.
- 3.2.6 Should sensitive receptors not be present within the relevant distances then **negligible** impacts would be expected and further assessment is not necessary.

Step 2 - Assess the Risk of Dust Impacts

- 3.2.7 Step 2 assesses the risk of potential dust impacts. A site is allocated a risk category based on two factors:
- The scale and nature of the works, which determines the magnitude of dust arising as: small, medium or large (Step 2A); and,
 - The sensitivity of the area to dust impacts, which can be defined as low, medium or high sensitivity (Step 2B).
- 3.2.8 The two factors are combined in Step 2C to determine the risk of dust impacts without mitigation applied.
- 3.2.9 Step 2A defines the potential magnitude of dust emission through the construction phase. The relevant criteria are summarised in Table 3.

Table 3 Construction Dust - Magnitude of Emission

Magnitude	Activity	Criteria
Large	Earthworks	<ul style="list-style-type: none">• Total site area greater than 10,000m²• Potentially dusty soil type (e.g. clay, which will be prone to suspension when dry due to small particle size)• More than 10 heavy earth moving vehicles active at any one time• Formation of bunds greater than 8m in height• More than 100,000 tonnes of material moved

Magnitude	Activity	Criteria
	Construction	<ul style="list-style-type: none"> Total building volume greater than 100,000m³ On site concrete batching Sandblasting
	Trackout	<ul style="list-style-type: none"> More than 50 Heavy Duty Vehicle (HDV) trips per day Potentially dusty surface material (e.g. high clay content) Unpaved road length greater than 100m
Medium	Earthworks	<ul style="list-style-type: none"> Total site area 2,500m² to 10,000m² Moderately dusty soil type (e.g. silt) 5 to 10 heavy earth moving vehicles active at any one time Formation of bunds 4m to 8m in height Total material moved 20,000 tonnes to 100,000 tonnes
	Construction	<ul style="list-style-type: none"> Total building volume 25,000m³ to 100,000m³ Potentially dusty construction material (e.g. concrete) On site concrete batching
	Trackout	<ul style="list-style-type: none"> 10 to 50 HDV trips per day Moderately dusty surface material (e.g. high clay content) Unpaved road length 50m to 100m
Small	Earthworks	<ul style="list-style-type: none"> Total site area less than 2,500m² Soil type with large grain size (e.g. sand) Less than 5 heavy earth moving vehicles active at any one time Formation of bunds less than 4m in height Total material moved less than 20,000 tonnes Earthworks during wetter months
	Construction	<ul style="list-style-type: none"> Total building volume less than 25,000m³ Construction material with low potential for dust release (e.g. metal cladding or timber)
	Trackout	<ul style="list-style-type: none"> Less than 10 HDV trips per day Surface material with low potential for dust release Unpaved road length less than 50m

3.2.10 Step 2B defines the sensitivity of the area around the development to potential dust impacts. The influencing factors are shown in Table 4.

Table 4 Construction Dust - Examples of Factors Defining Sensitivity of an Area

Receptor Sensitivity	Examples	
	Human Receptors	Ecological Receptors
High	<ul style="list-style-type: none"> • Users expect high levels of amenity • High aesthetic or value property • People expected to be present continuously for extended periods of time • Locations where members of the public are exposed over a time period relevant to the AQO for PM₁₀ e.g. residential properties, hospitals, schools and residential care homes 	<ul style="list-style-type: none"> • Internationally or nationally designated site e.g. Special Area of Conservation
Medium	<ul style="list-style-type: none"> • Users would expect to enjoy a reasonable level of amenity • Aesthetics or value of their property could be diminished by soiling • People or property wouldn't reasonably be expected to be present here continuously or regularly for extended periods as part of the normal pattern of use of the land e.g. parks and places of work 	<ul style="list-style-type: none"> • Nationally designated site e.g. Sites of Special Scientific Interest
Low	<ul style="list-style-type: none"> • Enjoyment of amenity would not reasonably be expected • Property would not be expected to be diminished in appearance • Transient exposure, where people would only be expected to be present for limited periods e.g. public footpaths, shopping streets, playing fields, farmland, short term car parks and roads 	<ul style="list-style-type: none"> • Locally designated site e.g. Local Nature Reserve

3.2.11 The guidance also provides the following factors to consider when determining the sensitivity of an area to potential dust impacts:

- Any history of dust generating activities in the area;
- The likelihood of concurrent dust generating activity on nearby sites;
- Any pre-existing screening between the source and receptors;
- Any conclusions drawn from analysing local meteorological data which accurately represent the area; and if relevant the season during which works will take place;
- Any conclusions drawn from local topography;
- Duration of the potential impact, as a receptor may become more sensitive over time; and,

- Any known specific receptor sensitivities which go beyond the classifications given in the document.

3.2.12 These factors were considered in the undertaking of this assessment.

3.2.13 The criteria for determining the sensitivity of the area to dust soiling effects on people and property is summarised in Table 5.

Table 5 Construction Dust - Sensitivity of the Area to Dust Soiling Effects on People and Property

Receptor Sensitivity	Number of Receptors	Distance from the Source (m)			
		Less than 20	Less than 50	Less than 100	Less than 350
High	More than 100	High	High	Medium	Low
	10 - 100	High	Medium	Low	Low
	1 - 10	Medium	Low	Low	Low
Medium	More than 1	Medium	Low	Low	Low
Low	More than 1	Low	Low	Low	Low

3.2.14 Table 6 outlines the criteria for determining the sensitivity of the area to human health impacts.

Table 6 Construction Dust - Sensitivity of the Area to Human Health Impacts

Receptor Sensitivity	Background Annual Mean PM ₁₀ Concentration	Number of Receptors	Distance from the Source (m)				
			Less than 20	Less than 50	Less than 100	Less than 200	Less than 350
High	Greater than 32µg/m ³	More than 100	High	High	High	Medium	Low
		10 - 100	High	High	Medium	Low	Low
		1 - 10	High	Medium	Low	Low	Low
	28 - 32µg/m ³	More than 100	High	High	Medium	Low	Low
		10 - 100	High	Medium	Low	Low	Low
		1 - 10	High	Medium	Low	Low	Low

Receptor Sensitivity	Background Annual Mean PM ₁₀ Concentration	Number of Receptors	Distance from the Source (m)				
			Less than 20	Less than 50	Less than 100	Less than 200	Less than 350
	24 - 28µg/m ³	More than 100	High	Medium	Low	Low	Low
		10 - 100	High	Medium	Low	Low	Low
		1 - 10	Medium	Low	Low	Low	Low
	Less than 24µg/m ³	More than 100	Medium	Low	Low	Low	Low
		10 - 100	Low	Low	Low	Low	Low
		1 - 10	Low	Low	Low	Low	Low
	Medium	Greater than 32µg/m ³	More than 10	High	Medium	Low	Low
			1 - 10	Medium	Low	Low	Low
	28 - 32µg/m ³	More than 10	Medium	Low	Low	Low	Low
		1 - 10	Low	Low	Low	Low	Low
	24 - 28µg/m ³	More than 10	Low	Low	Low	Low	Low
		1 - 10	Low	Low	Low	Low	Low
	Less than 24µg/m ³	More than 10	Low	Low	Low	Low	Low
		1 - 10	Low	Low	Low	Low	Low
	Low	-	1 or more	Low	Low	Low	Low

3.2.15 Table 7 outlines the criteria for determining the sensitivity of the area to ecological impacts.

Table 7 Construction Dust - Sensitivity of the Area to Ecological Impacts

Receptor Sensitivity	Distance from the Source (m)	
	Less than 20	Less than 50
High	High	Medium
Medium	Medium	Low

Receptor Sensitivity	Distance from the Source (m)	
	Less than 20	Less than 50
Low	Low	Low

3.2.16 Step 2C combines the dust emission magnitude with the sensitivity of the area to determine the risk of unmitigated impacts.

3.2.17 Table 8 outlines the risk category from earthworks and construction activities.

Table 8 Construction Dust - Dust Risk Category from Earthworks and Construction Activities

Receptor Sensitivity	Dust Emission Magnitude		
	Large	Medium	Small
High	High	Medium	Low
Medium	Medium	Medium	Low
Low	Low	Low	Negligible

3.2.18 Table 9 outlines the risk category from trackout activities.

Table 9 Construction Dust - Dust Risk Category from Trackout Activities

Receptor Sensitivity	Dust Emission Magnitude		
	Large	Medium	Small
High	High	Medium	Low
Medium	Medium	Low	Negligible
Low	Low	Low	Negligible

Step 3 - Site Specific Mitigation

3.2.19 Step 3 requires the identification of site specific mitigation measures within the IAQM guidance⁹ to reduce potential dust impacts based upon the relevant risk categories

⁹ Guidance on the Assessment of Dust from Demolition and Construction V1.1, IAQM, 2016.

identified in Step 2. For sites with **negligible** risk, mitigation measures beyond those required by legislation are not required. However, additional controls may be applied as part of good practice.

Step 4 - Determine Significant Effects

3.2.20 Once the risk of dust impacts has been determined and the appropriate mitigation measures identified, the final step is to determine the significance of any residual impacts. For almost all construction activity, the aim should be to control effects through the use of effective mitigation. Experience shows that this is normally possible. Hence the residual effect will normally be **not significant**.

3.2.21 The determination of significance relies on professional judgement and reasoning should be provided as far as practicable. The IAQM guidance suggests the provision of details of the assessor's qualifications and experience. These are provided in Appendix 2.

3.3 Operational Phase Assessment

Potential Development Impacts

3.3.1 The proposed development has the potential to affect existing air quality as a result of road traffic exhaust emissions associated with vehicles travelling to and from the site during the operational phase. Potential impacts have therefore been defined by predicting pollutant concentrations at sensitive locations using dispersion modelling for the following scenarios:

- 2019 - Verification;
- Opening year Do-Minimum (DM) (predicted traffic flows in 2027 should the proposals not proceed); and,
- Opening year Do-Something (DS) (predicted traffic flows in 2027 should the proposals be completed).

3.3.2 Reference should be made to Appendix 1 for assessment input data and details of the verification process.

- 3.3.3 Locations sensitive to potential changes in off-site pollutant concentrations were identified within 200m of the highway network in accordance with the guidance provided within the Design Manual for Roads and Bridges (DMRB)¹⁰ on the likely limits of pollutant dispersion from road sources. The criteria provided within DEFRA guidance¹¹ on where the AQOs apply, as summarised in Table 2, was utilised to determine worst-case receptor positions in the vicinity of links likely to be affected by changes in traffic flows as a result of the development.
- 3.3.4 The significance of predicted air quality impacts was determined in accordance with the guidance provided within the IAQM document 'Land-Use Planning & Development Control: Planning for Air Quality'¹². Using this methodology impacts were defined based on the interaction between the predicted pollutant concentration from the DS scenario and the magnitude of change between the DM and DS scenarios, as outlined in Table 10.

Table 10 Significance of Operational Phase Road Vehicle Exhaust Emissions Impact

Concentration at Receptor in Assessment Year	Predicted Concentration Change as Proportion of AQO/ Interim Target (%)			
	1	2 - 5	6 - 10	> 10
75% or less of AQO/Interim Target	Negligible	Negligible	Slight	Moderate
76 - 94% of AQO/Interim Target	Negligible	Slight	Moderate	Moderate
95 - 102% of AQO/Interim Target	Slight	Moderate	Moderate	Substantial
103 - 109% of AQO/Interim Target	Moderate	Moderate	Substantial	Substantial
110% or more of AQO/Interim Target	Moderate	Substantial	Substantial	Substantial

- 3.3.5 The matrix shown in Table 10 is intended to be used by rounding the change in percentage pollutant concentration to whole numbers, which makes it clearer which cell the impact falls within. It should be noted that changes of 0%, i.e. less than 0.5%, are described as **negligible**.

¹⁰ LA 105: Air Quality, Highways England, 2019.

¹¹ Local Air Quality Management Technical Guidance (TG22), DEFRA, 2022.

¹² Land-Use Planning & Development Control: Planning for Air Quality, IAQM, 2017.

3.3.6 Following the prediction of impacts at discrete receptor locations, the IAQM document¹³ provides guidance on determining the overall air quality impact significance of the operation of a development. The following factors are identified for consideration by the assessor:

- The existing and future air quality in the absence of the development;
- The extent of current and future population exposure to the impacts; and,
- The influence and validity of any assumptions adopted when undertaking the prediction of impacts.

3.3.7 The IAQM guidance states that an assessment must reach a conclusion on the likely significance of the predicted impact. Where the overall effect is **moderate** or **substantial**, the effect is likely to be considered **significant**, whilst if the impact is **slight** or **negligible**, the impact is likely to be considered **not significant**. It should be noted that this is a binary judgement of either it is **significant** or it is **not significant**.

3.3.8 The determination of significance relies on professional judgement and reasoning has been provided as far as practicable. The IAQM guidance¹⁴ suggests the provision of details of the assessor's qualifications and experience. These are provided in Appendix 2.

Potential Future Exposure

3.3.9 The proposals have the potential to expose future residents to elevated pollution levels. In order to assess NO₂, PM₁₀ and PM_{2.5} concentrations across the development site, detailed dispersion modelling was undertaken. Reference should be made to Appendix 1 for a full description of the assessment input data.

3.3.10 The dispersion modelling results were compared against the relevant AQOs and Interim Target in order to determine the potential for exposure of future residents to elevated pollutant concentrations and identify appropriate mitigation, if necessary.

¹³ Land-Use Planning & Development Control: Planning for Air Quality, IAQM, 2017.

¹⁴ Land-Use Planning & Development Control: Planning for Air Quality, IAQM, 2017.

4.0 BASELINE

4.1 Introduction

- 4.1.1 Existing air quality conditions in the vicinity of the development site were identified in order to provide a baseline for assessment. These are detailed in the following Sections.

4.2 Local Air Quality Management

- 4.2.1 As required by the Environment Act (1995), as amended by the Environment Act (2021), MCC has undertaken Review and Assessment of air quality within their area of jurisdiction. This process has indicated that annual mean concentrations of NO₂ are above the AQO within the city. As such, a number of roads within Manchester have been included within the Greater Manchester Combined Authority (GMCA) AQMA. This is described as follows:

"This is the part of the Greater Manchester Combined Authority AQMA located within the Manchester City Council area."

- 4.2.2 The development is partially located within the AQMA. As such, there is the potential for vehicles travelling to and from the site to increase pollution levels in this sensitive area, as well as exposure of future residents to poor air quality. This has been considered throughout the assessment.
- 4.2.3 MCC has concluded that concentrations of all other pollutants considered within the AQS are currently below the relevant AQOs. As such, no further AQMA's have been designated.

4.3 Air Quality Monitoring

- 4.3.1 Monitoring of pollutant concentrations is undertaken by MCC throughout their area of jurisdiction. Recent NO₂ results recorded in the vicinity of the development are shown in Table 11.

Table 11 Monitoring Results

Monitoring Site	Monitored Annual Mean NO ₂ Concentration (µg/m ³)			
	2019	2020	2021	2022
MA97BNO	32.3	23.4	28.4	27.8

4.3.2 As shown in Table 11, annual mean NO₂ concentrations were below the AQO of 40µg/m³ at MA97BNO in recent years. Reference should be made to Figure 2 for a map of the survey position.

4.3.3 Pollutant concentrations recorded during 2020 and 2021 were lower than 2019 due to a reduction in traffic and associated emissions caused by the COVID-19 pandemic. The results should therefore be viewed with caution.

4.3.4 MCC do not undertake monitoring of PM₁₀ or PM_{2.5} within the vicinity of the site.

4.4 Background Pollutant Concentrations

4.4.1 Predictions of background pollutant concentrations on a 1km by 1km grid basis have been produced by DEFRA for the entire of the UK to assist LAs in their Review and Assessment of air quality. The proposed development site is located in grid square NGR: 382500, 397500 Data for this location was downloaded from the DEFRA website¹⁵ for the purpose of the assessment and is summarised in Table 12.

Table 12 Background Pollutant Concentration Predictions

Pollutant	Predicted Background Pollutant Concentration (µg/m ³)		
	2019	2023	2027
NO ₂	22.79	19.10	16.68
PM ₁₀	13.16	12.54	12.29
PM _{2.5}	8.54	8.10	7.92

¹⁵ <http://uk-air.defra.gov.uk/data/laqm-background-maps?year=2018>.

4.4.2 As shown in Table 12, predicted background NO₂, PM₁₀ and PM_{2.5} concentrations are below the relevant AQOs and Interim Target at the development site.

4.5 **Sensitive Receptors**

4.5.1 A sensitive receptor is defined as any location which may be affected by changes in air quality as a result of a development. These have been defined for dust and road vehicle exhaust emission impacts in the following Sections.

Construction Phase Sensitive Receptors

4.5.2 Receptors sensitive to potential dust impacts during earthworks and construction were identified from a desk-top study of the area up to 350m from the development boundary. These are summarised in Table 13.

Table 13 Earthworks and Construction Dust Sensitive Receptors

Distance from Site Boundary (m)	Approximate Number of Human Receptors	Approximate Number of Ecological Receptors
Up to 20	More than 100	0
Up to 50	More than 100	0
Up to 100	More than 100	-
Up to 350	More than 100	-

4.5.3 Receptors sensitive to potential dust impacts from trackout were identified from a desk-top study of the area up to 50m from the road network within 500m of the site access. These are summarised in Table 14.

Table 14 Trackout Dust Sensitive Receptors

Distance from Site Access Route (m)	Approximate Number of Human Receptors	Approximate Number of Ecological Receptors
Up to 20	More than 100	0
Up to 50	More than 100	0

4.5.4 There are no ecological receptors within 50m of the development boundary or the access route within 500m of the site entrance. As such, ecological impacts have not been assessed further within this report.

4.5.5 A number of additional factors have been considered when determining the sensitivity of the surrounding area. These are summarised in Table 15.

Table 15 Additional Area Sensitivity Factors to Potential Dust Impacts

Guidance	Comment
Whether there is any history of dust generating activities in the area	The baseline review did not indicate any dust generating activities in the local area
The likelihood of concurrent dust generating activity on nearby sites	A review of the planning portal indicated that a number of applications have recently been granted consent in the vicinity of the site. It is therefore possible that there will be concurrent dust generation should the construction phases of these schemes overlap with the proposed development
Pre-existing screening between the source and the receptors	There is no significant screening around the site boundary
Conclusions drawn from analysing local meteorological data which accurately represent the area: and if relevant the season during which works will take place	As shown in Figure 3, the predominant wind bearing at the site is from the west with significant frequencies from the south-west. As such, receptors to the east and north-east of the development are most likely to be affected by dust releases
Conclusions drawn from local topography	There are no significant topographical constraints to dust dispersion
Duration of the potential impact, as a receptor may become more sensitive over time	Currently it is unclear as to the duration of the construction phase. However, it is likely that it will extend over one year. The sensitivity of nearby receptors is unlikely to change during this time
Any known specific receptor sensitivities which go beyond the classifications given in the document	No specific receptor sensitivities identified during the baseline assessment

4.5.6 Based on the criteria shown in Table 4, the sensitivity of the receiving environment to potential dust impacts was determined as **high**. This was because the identified receptors included residential properties.

4.5.7 The sensitivity of the receiving environment to specific potential dust impacts, based on the criteria shown in Section 3.2, is shown in Table 16.

Table 16 Sensitivity of the Surrounding Area to Potential Dust Impacts

Potential Impact	Sensitivity of the Surrounding Area		
	Earthworks	Construction	Trackout
Dust Soiling	High	High	High
Human Health	Medium	Medium	Medium

Operational Phase Sensitive Receptors

4.5.8 Locations sensitive to potential operational phase road vehicle exhaust emission impacts were identified from a desk-top study and are summarised in Table 17.

Table 17 Operational Phase Road Vehicle Exhaust Emission Sensitive Receptor Locations

Receptor		NGR (m)	
		X	Y
R1	Residential - Vox Manchester	382415.7	397077.2
R2	Residential - The Trilogy	382535.2	397069.5
R3	Residential - 59 Brackley Avenue	382637.2	397086.7
R4	Residential - The Trilogy	382548.9	397121.6
R5	Residential - Ellesmere Street	382629.3	397215.2
R6	Residential - 27 Bentinck Street	382749.9	397259.2
R7	Residential - Heddle Avenue	382438.1	396902.1
R8	Residential - 354 Chester Road	382388.5	396743.9
R9	Residential - Beattock Close	382940.0	397221.4
R10	Residential - Citygate Central	382957.4	397355.7
R11	Residential - The Box Works	382795.4	397423.7
R12	Residential - Chester Road	383094.5	397314.8
R13	Residential - Castle Wharf	383235.1	397428.5

Receptor		NGR (m)	
		X	Y
R14	Residential - Three60	383175.0	397221.9
R15	Residential - Jackson Crescent	383251.3	397126.1
R16	Residential - 05 Chorlton Road	382983.8	397122.2
R17	Residential - 21 Quenby Street	382948.4	397097.3

4.5.9 Reference should be made to Figure 4 for a graphical representation of road vehicle exhaust emission sensitive receptor locations.

5.0 ASSESSMENT

5.1 Introduction

- 5.1.1 There is the potential for air quality impacts as a result of the construction and operation of the proposed development, as well as the exposure of future residents to poor air quality. These issues are assessed in the following Sections.

5.2 Construction Phase Assessment

Step 1 - Screen the Need for an Assessment

- 5.2.1 The undertaking of activities such as excavation, ground works, cutting, construction and storage of materials has the potential to result in fugitive dust emissions throughout the construction phase. Vehicle movements on the local road network also have the potential to result in the re-suspension of dust from highway surfaces.
- 5.2.2 The potential for impacts at sensitive locations depends significantly on local meteorology during the undertaking of dust generating activities, with the most significant effects likely to occur during dry and windy conditions.
- 5.2.3 The desk-study undertaken to inform the baseline identified a number of sensitive receptors within 350m of the site boundary. As such, a detailed assessment of potential dust impacts was required.

Step 2 - Assess the Risk of Dust Impacts

Earthworks

- 5.2.4 Earthworks may involve excavating material, haulage, tipping and stockpiling. The area of the proposed development site is greater than 10,000m². In accordance with the criteria outlined in Table 3, the magnitude of potential dust emissions from earthworks is therefore **large**.

5.2.5 Table 16 indicates the sensitivity of the area to dust soiling effects on people and property is **high**. In accordance with the criteria outlined in Table 8, the development is considered to be a **high** risk site for dust soiling as a result of earthworks.

5.2.6 Table 16 indicates the sensitivity of the area to human health impacts is **medium**. In accordance with the criteria outlined in Table 8, the development is considered to be a **medium** risk site for human health impacts as a result of earthworks.

Construction

5.2.7 Due to the size of the development, the total building volume will be between 25,000m³ and 100,000m³. In accordance with the criteria outlined in Table 3, the magnitude of potential dust emissions from construction is therefore **medium**.

5.2.8 Table 16 indicates the sensitivity of the area to dust soiling effects on people and property is **high**. In accordance with the criteria outlined in Table 8, the development is considered to be a **medium** risk site for dust soiling as a result of construction activities.

5.2.9 Table 16 indicates the sensitivity of the area to human health impacts is **medium**. In accordance with the criteria outlined in Table 8, the development is considered to be a **medium** risk site for human health impacts as a result of construction activities.

Trackout

5.2.10 Based on the site area and existing hardstanding, it is anticipated that the unpaved road length will be between 50m and 100m. In accordance with the criteria outlined in Table 3, the magnitude of potential dust emissions from trackout is therefore **medium**.

5.2.11 Table 16 indicates the sensitivity of the area to dust soiling effects to people and property is **high**. In accordance with the criteria outlined in Table 9, the development is considered to be a **medium** risk site for dust soiling as a result of trackout activities.

5.2.12 Table 16 indicates the sensitivity of the area to human health impacts is **medium**. In accordance with the criteria outlined in Table 9, the development is considered to be a **low** risk site for human health impacts as a result of trackout activities.

Summary of the Risk of Dust Effects

5.2.13 A summary of the risk from each dust generating activity is provided in Table 18.

Table 18 Summary of Potential Unmitigated Dust Risks

Potential Impact	Risk		
	Earthworks	Construction	Trackout
Dust Soiling	High	Medium	Medium
Human Health	Medium	Medium	Low

5.2.14 As indicated in Table 18, the potential risk of dust soiling is **high** from earthworks and **medium** from trackout and construction. The potential risk of human health effects is **medium** from earthworks and construction and **negligible** from trackout.

5.2.15 It should be noted that the potential for impacts depends significantly on the distance between the dust generating activity and receptor location. Risk was predicted based on a worst-case scenario of works being undertaken at the site boundary closest to each sensitive area. Therefore, actual risk is likely to be lower than that predicted during the majority of the construction phase.

Step 3 - Site Specific Mitigation

5.2.16 The IAQM guidance¹⁶ provides potential mitigation measures to reduce impacts as a result of fugitive dust emissions during the construction phase. These have been adapted for the development site as summarised in Table 19. These may be reviewed prior to the commencement of construction works and incorporated into a Construction Environmental Management Plan or similar if required by the LA.

¹⁶ Guidance on the Assessment of Dust from Demolition and Construction V1.1, IAQM, 2016.

Table 19 Fugitive Dust Emission Mitigation Measures

Issue	Control Measure
Communications	<ul style="list-style-type: none"> • Develop and implement a stakeholder communications plan that includes community engagement before work commences on site. • Display the name and contact details of person(s) accountable for air quality and dust issues on the site boundary. This may be the environment manager/engineer or the site manager • Display the head or regional office contact information • Develop and implement a Dust Management Plan (DMP) or similar, which may include measures to control other emissions, approved by the LA
Site management	<ul style="list-style-type: none"> • Record all dust and air quality complaints, identify cause(s), take appropriate measures to reduce emissions in a timely manner, and record the measures taken • Make the complaints log available to the LA upon request • Record any exceptional incidents that cause dust and/or air emissions, either on- or off- site, and the action taken to resolve the situation in the log book
Monitoring	<ul style="list-style-type: none"> • Carry out regular site inspections to monitor compliance with the DMP, record inspection results, and make an inspection log available to the LA upon request • Increase the frequency of site inspections when activities with a high potential to produce dust are being carried out and during prolonged dry or windy conditions
Site preparation	<ul style="list-style-type: none"> • Plan site layout so that machinery and dust causing activities are located away from receptors, as far as is possible • Erect solid screens or barriers around dusty activities or the site boundary that are at least as high as any stockpiles on site • Fully enclose specific operations where there is a high potential for dust production and they are active for an extensive period • Avoid site runoff of water or mud • Keep site fencing, barriers and scaffolding clean using wet methods • Remove materials that have a potential to produce dust from site as soon as possible, unless being re-used • Cover, seed or fence stockpiles to prevent wind whipping
Operating vehicle/machinery and sustainable travel	<ul style="list-style-type: none"> • Ensure all vehicles switch off engines when stationary - no idling vehicles • Avoid the use of diesel or petrol powered generators and use mains electricity or battery powered equipment where practicable

Issue	Control Measure
Operations	<ul style="list-style-type: none"> • Only use cutting, grinding or sawing equipment fitted or in conjunction with suitable dust suppression techniques • Ensure an adequate water supply on the site for effective dust suppression, using non-potable water where possible and appropriate • Use enclosed chutes and conveyors and covered skips • Minimise drop heights and use fine water sprays wherever appropriate • Ensure equipment is available to clean any dry spillages, and clean up spillages as soon as reasonably practicable using wet cleaning methods
Waste management	<ul style="list-style-type: none"> • No bonfires and burning of waste materials
Earthworks	<ul style="list-style-type: none"> • Re-vegetate earthworks and exposed areas/soil stockpiles to stabilise surfaces as soon as practicable • Use Hessian, mulches or trackifiers where it is not possible to re-vegetate or cover with topsoil, as soon as practicable • Only remove the cover in small areas during work and not all at once
Construction	<ul style="list-style-type: none"> • Avoid scabbling (roughening of concrete surfaces), if possible • Ensure sand and other aggregates are stored in bunded areas and are not allowed to dry out • Ensure bulk cement and other fine powder materials are delivered in enclosed tankers and stored in silos with suitable emission control systems to prevent escape of material and overfilling during delivery
Trackout	<ul style="list-style-type: none"> • Use water-assisted dust sweeper on access and local roads, if required • Avoid dry sweeping of large areas • Ensure vehicles entering and leaving site are covered to prevent escape of materials • Implement a wheel washing system, if required • Ensure there is an adequate area of hard surfaced road between the wheel wash facility and the site exit, where site size and layout permits

Step 4 - Determine Significant Effects

5.2.17 Assuming the relevant mitigation measures outlined in Table 19 are implemented, the residual impact from all dust generating activities is predicted to be **not significant**, in accordance with the IAQM guidance¹⁷.

¹⁷ Guidance on the Assessment of Dust from Demolition and Construction V1.1, IAQM, 2016.

5.3 Operational Phase Assessment

Potential Development Impacts

5.3.1 Vehicle movements associated with the operation of the proposal will generate exhaust emissions on the local and regional road networks. An assessment was therefore undertaken using dispersion modelling in order to quantify potential changes in pollutant concentrations at sensitive locations in the vicinity of the site.

5.3.2 The assessment included the following scenarios:

- 2019 - Verification;
- 2027 - DM; and,
- 2027 - DS.

5.3.3 The DM scenario (i.e. without development) included baseline traffic data, inclusive of anticipated growth for the relevant assessment year. The DS scenario (i.e. with development) included baseline traffic data, inclusive of anticipated growth for the relevant assessment year, in addition to predicted vehicle trips associated with the operation of the proposals.

5.3.4 For the purpose of the assessment traffic data for 2027 was utilised as the development opening year. Air quality is predicted to improve in the future. However, in order to provide a robust assessment, emission factors for 2019 were utilised within the dispersion model. The use of 2027 traffic data and 2019 emission factors is considered to provide a worst-case scenario and therefore a sufficient level of confidence can be placed within the predicted pollution concentrations.

5.3.5 Reference should be made to Appendix 1 for full assessment input details.

Predicted Concentrations

5.3.6 Annual mean NO₂ concentrations were predicted at the sensitive receptor locations for the DM and DS scenarios. These are summarised in Table 20.

Table 20 Predicted Annual Mean NO₂ Concentrations

Receptor		Predicted Annual Mean NO ₂ Concentration (µg/m ³)		
		DM	DS	Change
R1	Residential - Vox Manchester	23.20	23.31	0.11
R2	Residential - The Trilogy	37.67	37.73	0.06
R3	Residential - 59 Brackley Avenue	24.33	24.35	0.02
R4	Residential - The Trilogy	25.28	25.30	0.02
R5	Residential - Ellesmere Street	25.75	25.77	0.02
R6	Residential - 27 Bentinck Street	23.72	23.74	0.02
R7	Residential - Heddle Avenue	26.85	26.87	0.02
R8	Residential - 354 Chester Road	25.74	25.77	0.03
R9	Residential - Beattock Close	23.59	23.60	0.01
R10	Residential - Citygate Central	34.68	34.70	0.02
R11	Residential - The Box Works	24.45	24.46	0.01
R12	Residential - Chester Road	25.50	25.51	0.01
R13	Residential - Castle Wharf	28.67	28.68	0.01
R14	Residential - Three60	27.75	27.76	0.01
R15	Residential - Jackson Crescent	21.85	21.85	0.00
R16	Residential - 05 Chorlton Road	23.56	23.57	0.01
R17	Residential - 21 Quenby Street	25.11	25.11	0.00

5.3.7 As indicated in Table 20, predicted annual mean NO₂ concentrations were below the AQO at all sensitive receptors in both the DM and DS scenarios.

5.3.8 Annual mean PM₁₀ concentrations were predicted at the sensitive receptor locations for the DM and DS scenarios. These are summarised in Table 21.

Table 21 Predicted Annual Mean PM₁₀ Concentrations

Receptor		Predicted Annual Mean PM ₁₀ Concentration (µg/m ³)		
		DM	DS	Change
R1	Residential - Vox Manchester	13.71	13.73	0.02
R2	Residential - The Trilogy	17.31	17.32	0.02
R3	Residential - 59 Brackley Avenue	13.99	13.99	0.01
R4	Residential - The Trilogy	14.20	14.21	0.01
R5	Residential - Ellesmere Street	14.16	14.16	0.00
R6	Residential - 27 Bentinck Street	13.81	13.81	0.00
R7	Residential - Heddle Avenue	14.59	14.60	0.01
R8	Residential - 354 Chester Road	14.33	14.34	0.01
R9	Residential - Beattock Close	13.68	13.68	0.00
R10	Residential - Citygate Central	16.05	16.06	0.01
R11	Residential - The Box Works	13.97	13.97	0.00
R12	Residential - Chester Road	14.10	14.10	0.00
R13	Residential - Castle Wharf	14.96	14.96	0.00
R14	Residential - Three60	14.44	14.44	0.00
R15	Residential - Jackson Crescent	13.24	13.24	0.00
R16	Residential - 05 Chorlton Road	13.53	13.53	0.00
R17	Residential - 21 Quenby Street	13.80	13.80	0.00

5.3.9 As indicated in Table 21, predicted annual mean PM₁₀ concentrations were below the relevant AQO at all sensitive receptors in both the DM and DS scenarios.

5.3.10 Annual mean PM_{2.5} concentrations were predicted at the sensitive receptor locations for the DM and DS scenarios. These are summarised in Table 22.

Table 22 Predicted Annual Mean PM_{2.5} Concentrations

Receptor		Predicted Annual Mean PM _{2.5} Concentration (µg/m ³)		
		DM	DS	Change
R1	Residential - Vox Manchester	8.70	8.72	0.01
R2	Residential - The Trilogy	10.69	10.70	0.01
R3	Residential - 59 Brackley Avenue	8.86	8.86	0.00
R4	Residential - The Trilogy	8.98	8.98	0.00
R5	Residential - Ellesmere Street	8.96	8.96	0.00
R6	Residential - 27 Bentinck Street	8.77	8.77	0.00
R7	Residential - Heddle Avenue	9.19	9.19	0.00
R8	Residential - 354 Chester Road	9.05	9.05	0.00
R9	Residential - Beattock Close	8.71	8.71	0.00
R10	Residential - Citygate Central	10.05	10.05	0.00
R11	Residential - The Box Works	8.86	8.86	0.00
R12	Residential - Chester Road	8.94	8.94	0.00
R13	Residential - Castle Wharf	9.41	9.41	0.00
R14	Residential - Three60	9.14	9.14	0.00
R15	Residential - Jackson Crescent	8.47	8.47	0.00
R16	Residential - 05 Chorlton Road	8.64	8.64	0.00
R17	Residential - 21 Quenby Street	8.80	8.80	0.00

5.3.11 As indicated in Table 22, predicted annual mean PM_{2.5} concentrations were below the Interim Target at all sensitive receptors in both scenarios.

Predicted Impacts

5.3.12 Predicted impacts on annual mean NO₂ concentrations at the sensitive receptor locations are summarised in Table 23.

Table 23 Predicted Impacts - NO₂

Receptor		Predicted Annual Mean NO ₂ Concentration	Predicted Concentration Change as Proportion of AQO (%)	Impact Significance
R1	Residential - Vox Manchester	Below 75% of AQO	0	Negligible
R2	Residential - The Trilogy	95 - 102% of AQO	0	Negligible
R3	Residential - 59 Brackley Avenue	Below 75% of AQO	0	Negligible
R4	Residential - The Trilogy	Below 75% of AQO	0	Negligible
R5	Residential - Ellesmere Street	Below 75% of AQO	0	Negligible
R6	Residential - 27 Bentinck Street	Below 75% of AQO	0	Negligible
R7	Residential - Heddle Avenue	Below 75% of AQO	0	Negligible
R8	Residential - 354 Chester Road	Below 75% of AQO	0	Negligible
R9	Residential - Beattock Close	Below 75% of AQO	0	Negligible
R10	Residential - Citygate Central	76 - 94% of AQO	0	Negligible
R11	Residential - The Box Works	Below 75% of AQO	0	Negligible
R12	Residential - Chester Road	Below 75% of AQO	0	Negligible
R13	Residential - Castle Wharf	Below 75% of AQO	0	Negligible
R14	Residential - Three60	Below 75% of AQO	0	Negligible
R15	Residential - Jackson Crescent	Below 75% of AQO	0	Negligible
R16	Residential - 05 Chorlton Road	Below 75% of AQO	0	Negligible
R17	Residential - 21 Quenby Street	Below 75% of AQO	0	Negligible

5.3.13 As indicated in Table 23, impacts on annual mean NO₂ concentrations as a result of the proposed development were predicted to be **negligible** at all receptor locations.

5.3.14 Predicted impacts on annual mean PM₁₀ concentrations at the sensitive receptor locations are summarised in Table 24.

Table 24 Predicted Impacts - PM₁₀

Receptor		Predicted Annual Mean PM ₁₀ Concentration	Predicted Concentration Change as Proportion of AQO (%)	Impact Significance
R1	Residential - Vox Manchester	Below 75% of AQO	0	Negligible
R2	Residential - The Trilogy	Below 75% of AQO	0	Negligible
R3	Residential - 59 Brackley Avenue	Below 75% of AQO	0	Negligible
R4	Residential - The Trilogy	Below 75% of AQO	0	Negligible
R5	Residential - Ellesmere Street	Below 75% of AQO	0	Negligible
R6	Residential - 27 Bentinck Street	Below 75% of AQO	0	Negligible
R7	Residential - Heddle Avenue	Below 75% of AQO	0	Negligible
R8	Residential - 354 Chester Road	Below 75% of AQO	0	Negligible
R9	Residential - Beattock Close	Below 75% of AQO	0	Negligible
R10	Residential - Citygate Central	Below 75% of AQO	0	Negligible
R11	Residential - The Box Works	Below 75% of AQO	0	Negligible
R12	Residential - Chester Road	Below 75% of AQO	0	Negligible
R13	Residential - Castle Wharf	Below 75% of AQO	0	Negligible
R14	Residential - Three60	Below 75% of AQO	0	Negligible
R15	Residential - Jackson Crescent	Below 75% of AQO	0	Negligible
R16	Residential - 05 Chorlton Road	Below 75% of AQO	0	Negligible
R17	Residential - 21 Quenby Street	Below 75% of AQO	0	Negligible

5.3.15 As indicated in Table 24, impacts on annual mean PM₁₀ concentrations as a result of the proposed development were predicted to be **negligible** at all receptor locations.

5.3.16 Predicted impacts on annual mean PM_{2.5} concentrations at the sensitive receptor locations are summarised in Table 25.

Table 25 Predicted Impacts - PM_{2.5}

Receptor		Predicted Annual Mean PM _{2.5} Concentration	Predicted Concentration Change as Proportion of Interim Target (%)	Impact Significance
R1	Residential - Vox Manchester	Below 75% of Interim Target	0	Negligible
R2	Residential - The Trilogy	76 - 94% of Interim Target	0	Negligible
R3	Residential - 59 Brackley Avenue	Below 75% of Interim Target	0	Negligible
R4	Residential - The Trilogy	Below 75% of Interim Target	0	Negligible
R5	Residential - Ellesmere Street	Below 75% of Interim Target	0	Negligible
R6	Residential - 27 Bentinck Street	Below 75% of Interim Target	0	Negligible
R7	Residential - Heddle Avenue	76 - 94% of Interim Target	0	Negligible
R8	Residential - 354 Chester Road	76 - 94% of Interim Target	0	Negligible
R9	Residential - Beattock Close	Below 75% of Interim Target	0	Negligible
R10	Residential - Citygate Central	76 - 94% of Interim Target	0	Negligible
R11	Residential - The Box Works	Below 75% of Interim Target	0	Negligible
R12	Residential - Chester Road	Below 75% of Interim Target	0	Negligible
R13	Residential - Castle Wharf	76 - 94% of Interim Target	0	Negligible
R14	Residential - Three60	76 - 94% of Interim Target	0	Negligible
R15	Residential - Jackson Crescent	Below 75% of Interim Target	0	Negligible
R16	Residential - 05 Chorlton Road	Below 75% of Interim Target	0	Negligible
R17	Residential - 21 Quenby Street	Below 75% of Interim Target	0	Negligible

5.3.17 As indicated in Table 25, impacts on annual mean PM_{2.5} concentrations as a result of the proposed development were predicted to be **negligible** at all receptor locations.

Potential Future Exposure

5.3.18 The proposed development has the potential to expose future residents to elevated pollution levels. Dispersion modelling was therefore undertaken with the inputs described in Appendix 1 to quantify air quality conditions at the site.

5.3.19 Modelling was undertaken at a number of discrete receptors to represent conditions at sensitive locations. These were positioned along the northern and southern site boundary, as shown in Figure 5. It should be noted that the ground floor level of the development will consist of commercial land use with residential apartments located from first floor level and above. As such, receptors were positioned at the building façade at first floor level.

5.3.20 A summary of the receptor locations and predicted annual mean NO₂, PM₁₀ and PM_{2.5} concentrations is provided in Table 26.

Table 26 Annual Mean NO₂, PM₁₀ and PM_{2.5} Concentrations at Discrete Receptors

Receptor	NGR (m)		Predicted Annual Mean Concentration (µg/m ³)		
	X	Y	NO ₂	PM ₁₀	PM _{2.5}
R18	382422.6	397021.0	30.83	15.52	9.71
R19	382395.5	397021.4	27.73	14.74	9.28
R20	382382.2	397034.6	24.54	14.00	8.87
R21	382390.3	397043.6	24.16	13.92	8.82
R22	382375.8	397022.5	25.44	14.19	8.97

5.3.21 As shown in Table 26, predicted annual mean NO₂, PM₁₀ and PM_{2.5} concentrations were below the relevant AQOs and Interim Target at all proposed receptor locations.

5.3.22 Based on the assessment results, future residents are not predicted to be exposed to pollutant concentrations above the relevant AQOs and Interim Target. As such, the site is considered suitable for the proposed use from an air quality perspective.

Overall Impact Significance

5.3.23 The overall significance of operational phase road traffic emission impacts was determined as **negligible**. This was based on the overall predicted impacts at discrete receptor locations and the considerations outlined previously. Further justification is provided in Table 27.

Table 27 Overall Road Vehicle Exhaust Emissions Impact Significance

Guidance	Comment
The existing and future air quality in the absence of the development	<p>Predicted annual mean NO₂, PM₁₀ and PM_{2.5} concentrations were below the relevant AQO and Interim Target at all locations in the DM scenario</p> <p>The predicted concentrations are considered unlikely to change significantly in the absence of the proposals given the established nature of the area</p>
The extent of current and future population exposure to the impacts	The development is not predicted to affect the population exposed to exceedences of the AQOs or Interim Target
The influence and validity of any assumptions adopted when undertaking the prediction of impacts	<p>It is assumed that vehicle exhaust emission rates will not reduce in future years. This provides worst-case results when compared with the DEFRA and National Highways methodologies</p> <p>Due to the adopted assumptions it is considered the presented results are sufficiently robust for an assessment of this nature</p>

5.3.24 The IAQM guidance¹⁸ states that only if the impact is greater than **slight**, the effect is considered **significant**. As impacts were predicted to be **negligible**, overall effects are considered **not significant**, in accordance with the stated methodology.

¹⁸ Land-Use Planning & Development Control: Planning for Air Quality, IAQM, 2017.

6.0 MITIGATION

6.1.1 A number of mitigation measures have been included within the development in accordance with the requirements of the IAQM document 'Land-Use Planning & Development Control: Planning for Air Quality'¹⁹ to encourage the use of sustainable transport modes, manage vehicle flow and reduce pollution around the site. Table 28 describes the good practice principles detailed in the IAQM guidance along with how each has been addressed with regards to the proposals.

Table 28 Good Practice Design Principles for Operational Phase Air Quality Impacts

Phase	Principle	Action
Design Phase	New developments should not contravene the Council's AQAP ²⁰ , or render any of the measures unworkable	It is confirmed that the proposals will not contravene MCC's AQAP, or render any of the measures unworkable
	Wherever possible, new developments should not create a new "street canyon", or a building configuration that inhibits effective pollution dispersion	The development will not create a new street canyon or a building configuration that inhibits effective dispersion
	Delivering sustainable development should be the key theme of any application	The proposals have been designed to encourage sustainable behaviours, such as active and public transport due to its proximity to public transport and amenities
Operational Phase	The provision of at least 1 Electric Vehicle (EV) "rapid charge" point per 10 residential dwellings and/or 1,000m ² of commercial floor space. Where on-site parking is provided for residential dwellings, EV charging points for each parking space should be made	The proposals include 10 parking spaces and 3 accessible parking spaces. One EV charging point will therefore be installed

¹⁹ Land-Use Planning & Development Control: Planning for Air Quality, IAQM, 2017.

²⁰ Greater Manchester AQAP 2016-2021, GMCA, 2016.

Phase	Principle	Action
	Where development generates significant additional traffic, provision of a detailed Travel Plan (with provision to measure its implementation and effect) which sets out measures to encourage sustainable means of transport (public, cycling and walking) via subsidised or free-ticketing, improved links to bus stops, improved infrastructure and layouts to improve accessibility and safety	A Travel Plan can be secured via condition if required by MCC
	<p>All gas-fired boilers to meet a minimum standard of <40mgNO_x/kWh.</p> <p>All gas-fired CHP plant to meet a minimum emissions standard of:</p> <ul style="list-style-type: none"> • Spark ignition engine: 250mgNO_x/Nm³; • Compression ignition engine: 400mgNO_x/Nm³; • Gas turbine: 50mgNO_x/Nm³. <p>A presumption should be to use natural gas-fired installations. Where biomass is proposed within an urban area it is to meet minimum emissions standards of:</p> <ul style="list-style-type: none"> • Solid biomass boiler: 275mgNO_x/Nm³ and 25mgPM/Nm³ 	Any boilers to be included in the development will be provisioned in accordance with the relevant requirements

6.1.2 It is considered the above methods would further reduce potential impacts associated with the scheme. Specific mitigation suited to the proposals may be stipulated as a planning condition if deemed necessary by the LA.

7.0 CONCLUSION

- 7.1.1 Redmore Environmental Ltd was commissioned by FG Ordsall Lane Limited to undertake an Air Quality Assessment in support of a residential development on land off Dinton Street, Manchester.
- 7.1.2 The proposals have the potential to cause air quality impacts as a result of fugitive dust emissions during construction and road traffic exhaust emissions associated with vehicles travelling to and from the site during operation, as well as expose future residents to elevated pollution levels. As such, an Air Quality Assessment was required in order to determine baseline conditions, consider site suitability for the proposed end-use and assess potential effects as a result of the scheme.
- 7.1.3 During the construction phase of the development there is the potential for air quality impacts as a result of fugitive dust emissions from the site. These were assessed in accordance with the IAQM methodology. Assuming good practice dust control measures are implemented, the residual significance of potential air quality impacts from dust generated by earthworks, construction and trackout activities was predicted to be **not significant**.
- 7.1.4 The proposed development has the potential to expose future residents to elevated pollution levels and impact existing air quality in the vicinity of the site during operation. Dispersion modelling was therefore undertaken using ADMS-Roads in order to predict pollutant concentrations as a result of emissions from the local highway network. Results were subsequently verified using local monitoring data.
- 7.1.5 Review of the dispersion modelling results indicated that impacts on annual mean NO₂, PM₁₀ and PM_{2.5} concentrations as a result of traffic generated by the development were predicted to be **negligible** at all sensitive receptor locations.
- 7.1.6 The results of the dispersion modelling assessment also indicated that NO₂, PM₁₀ and PM_{2.5} concentrations were predicted to be below the relevant AQOs and Interim Target at the proposed building façade. As such, the site is considered suitable for the proposed use from an air quality perspective.

7.1.7 Following consideration of the relevant issues, air quality impacts as a result of the operation of the development were considered to be **not significant**, in accordance with the IAQM guidance.

7.1.8 Based on the assessment results, air quality factors are not considered a constraint to planning consent for the development.


8.0 **ABBREVIATIONS**

AADT	Annual Average Daily Traffic
ADM	Atmospheric Dispersion Modelling
AQAP	Air Quality Action Plan
AQLV	Air Quality Limit Value
AQMA	Air Quality Management Area
AQO	Air Quality Objective
AQS	Air Quality Strategy
CERC	Cambridge Environmental Research Consultants
DEFRA	Department for Environment, Food and Rural Affairs
DfT	Department for Transport
DM	Do-Minimum
DMP	Dust Management Plan
DMRB	Design Manual for Roads and Bridges
DS	Do-Something
EB	Eastbound
EV	Electric Vehicle
GMCA	Greater Manchester Combined Authority
HDV	Heavy Duty Vehicle
IAQM	Institute of Air Quality Management
LA	Local Authority
LAQM	Local Air Quality Management
LES	Low Emission Strategy
MCC	Manchester City Council
NB	Northbound
NGR	National Grid Reference
NO ₂	Nitrogen dioxide
NO _x	Oxides of nitrogen
NPPF	National Planning Policy Framework
NPPG	National Planning Policy Guidance
PM ₁₀	Particulate matter with an aerodynamic diameter of less than 10µm
PM _{2.5}	Particulate matter with an aerodynamic diameter of less than 2.5µm
SP	Slow Phase
SPD	Supplementary Planning Document
WB	Westbound

Z0

Roughness length

Figures

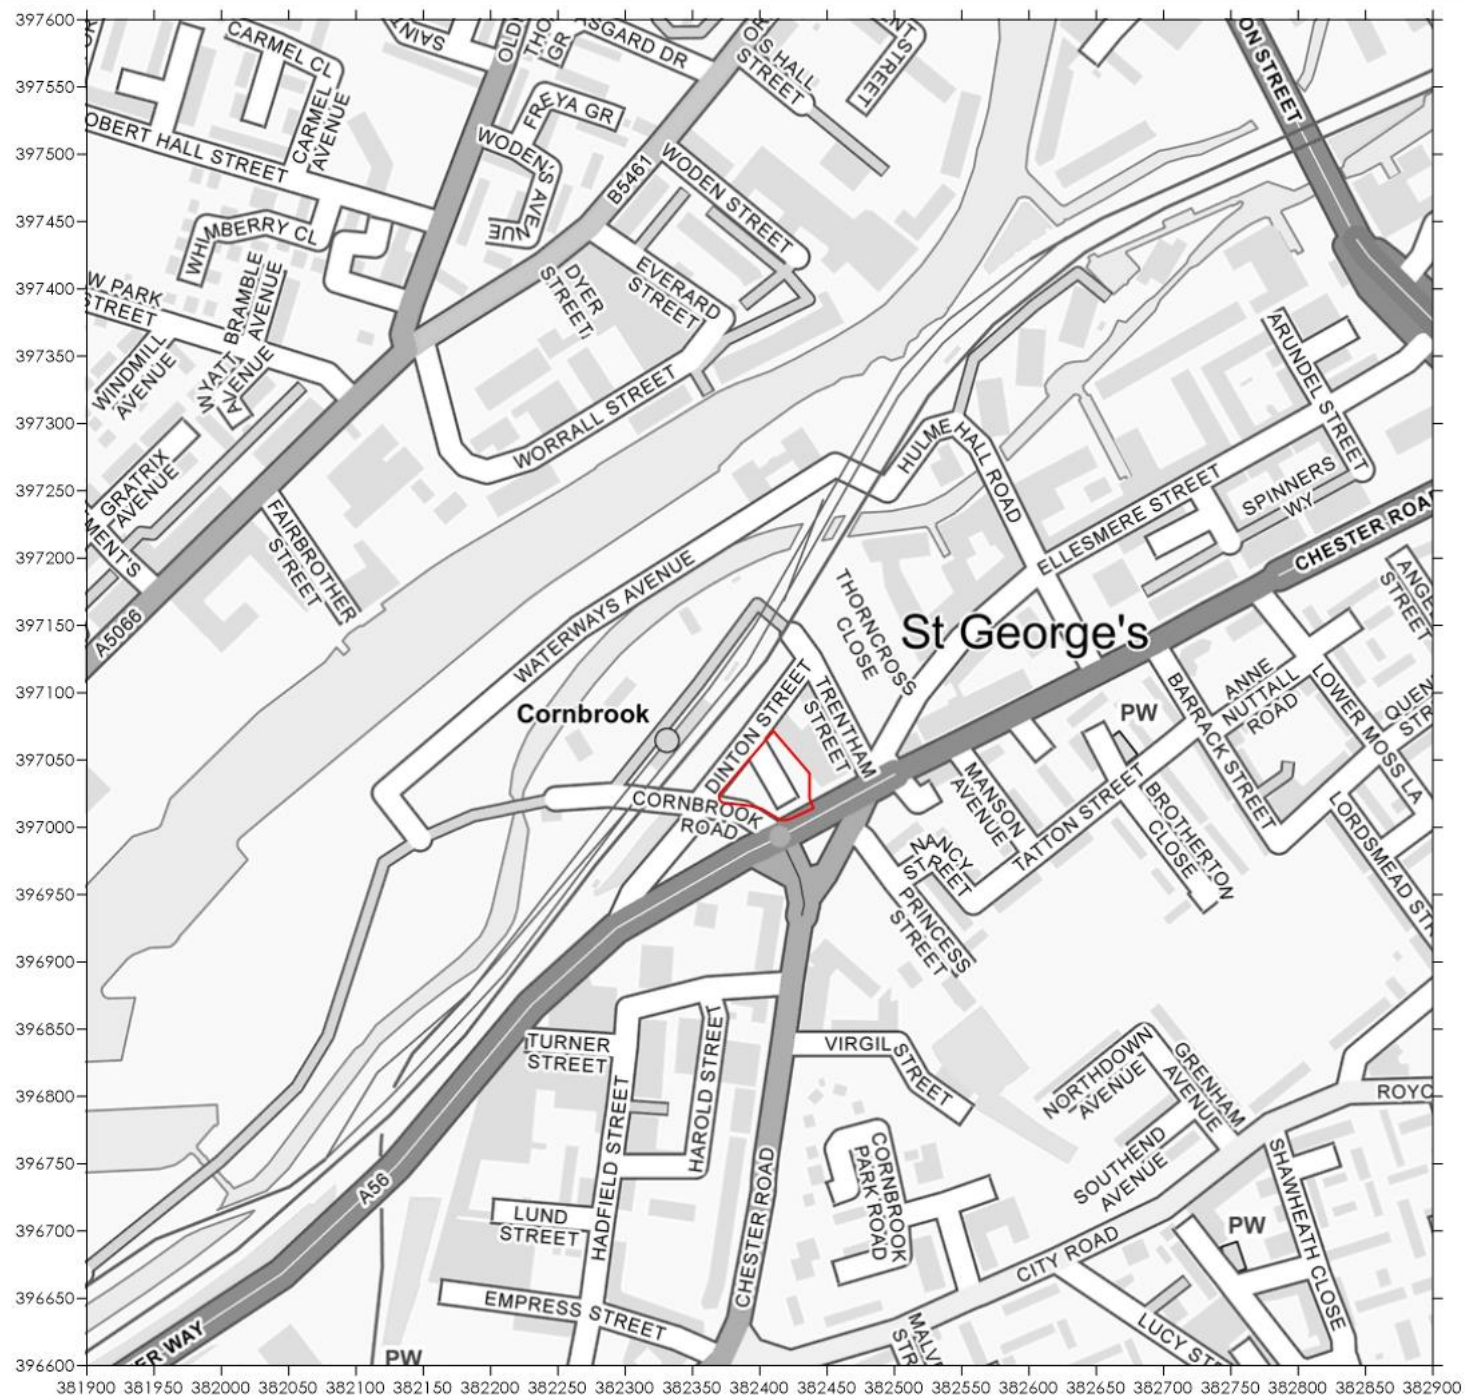

Legend

Site Boundary

Title


Project


Project Reference

Client

Contains Ordnance Survey Data
© Crown Copyright and Database Act 2022



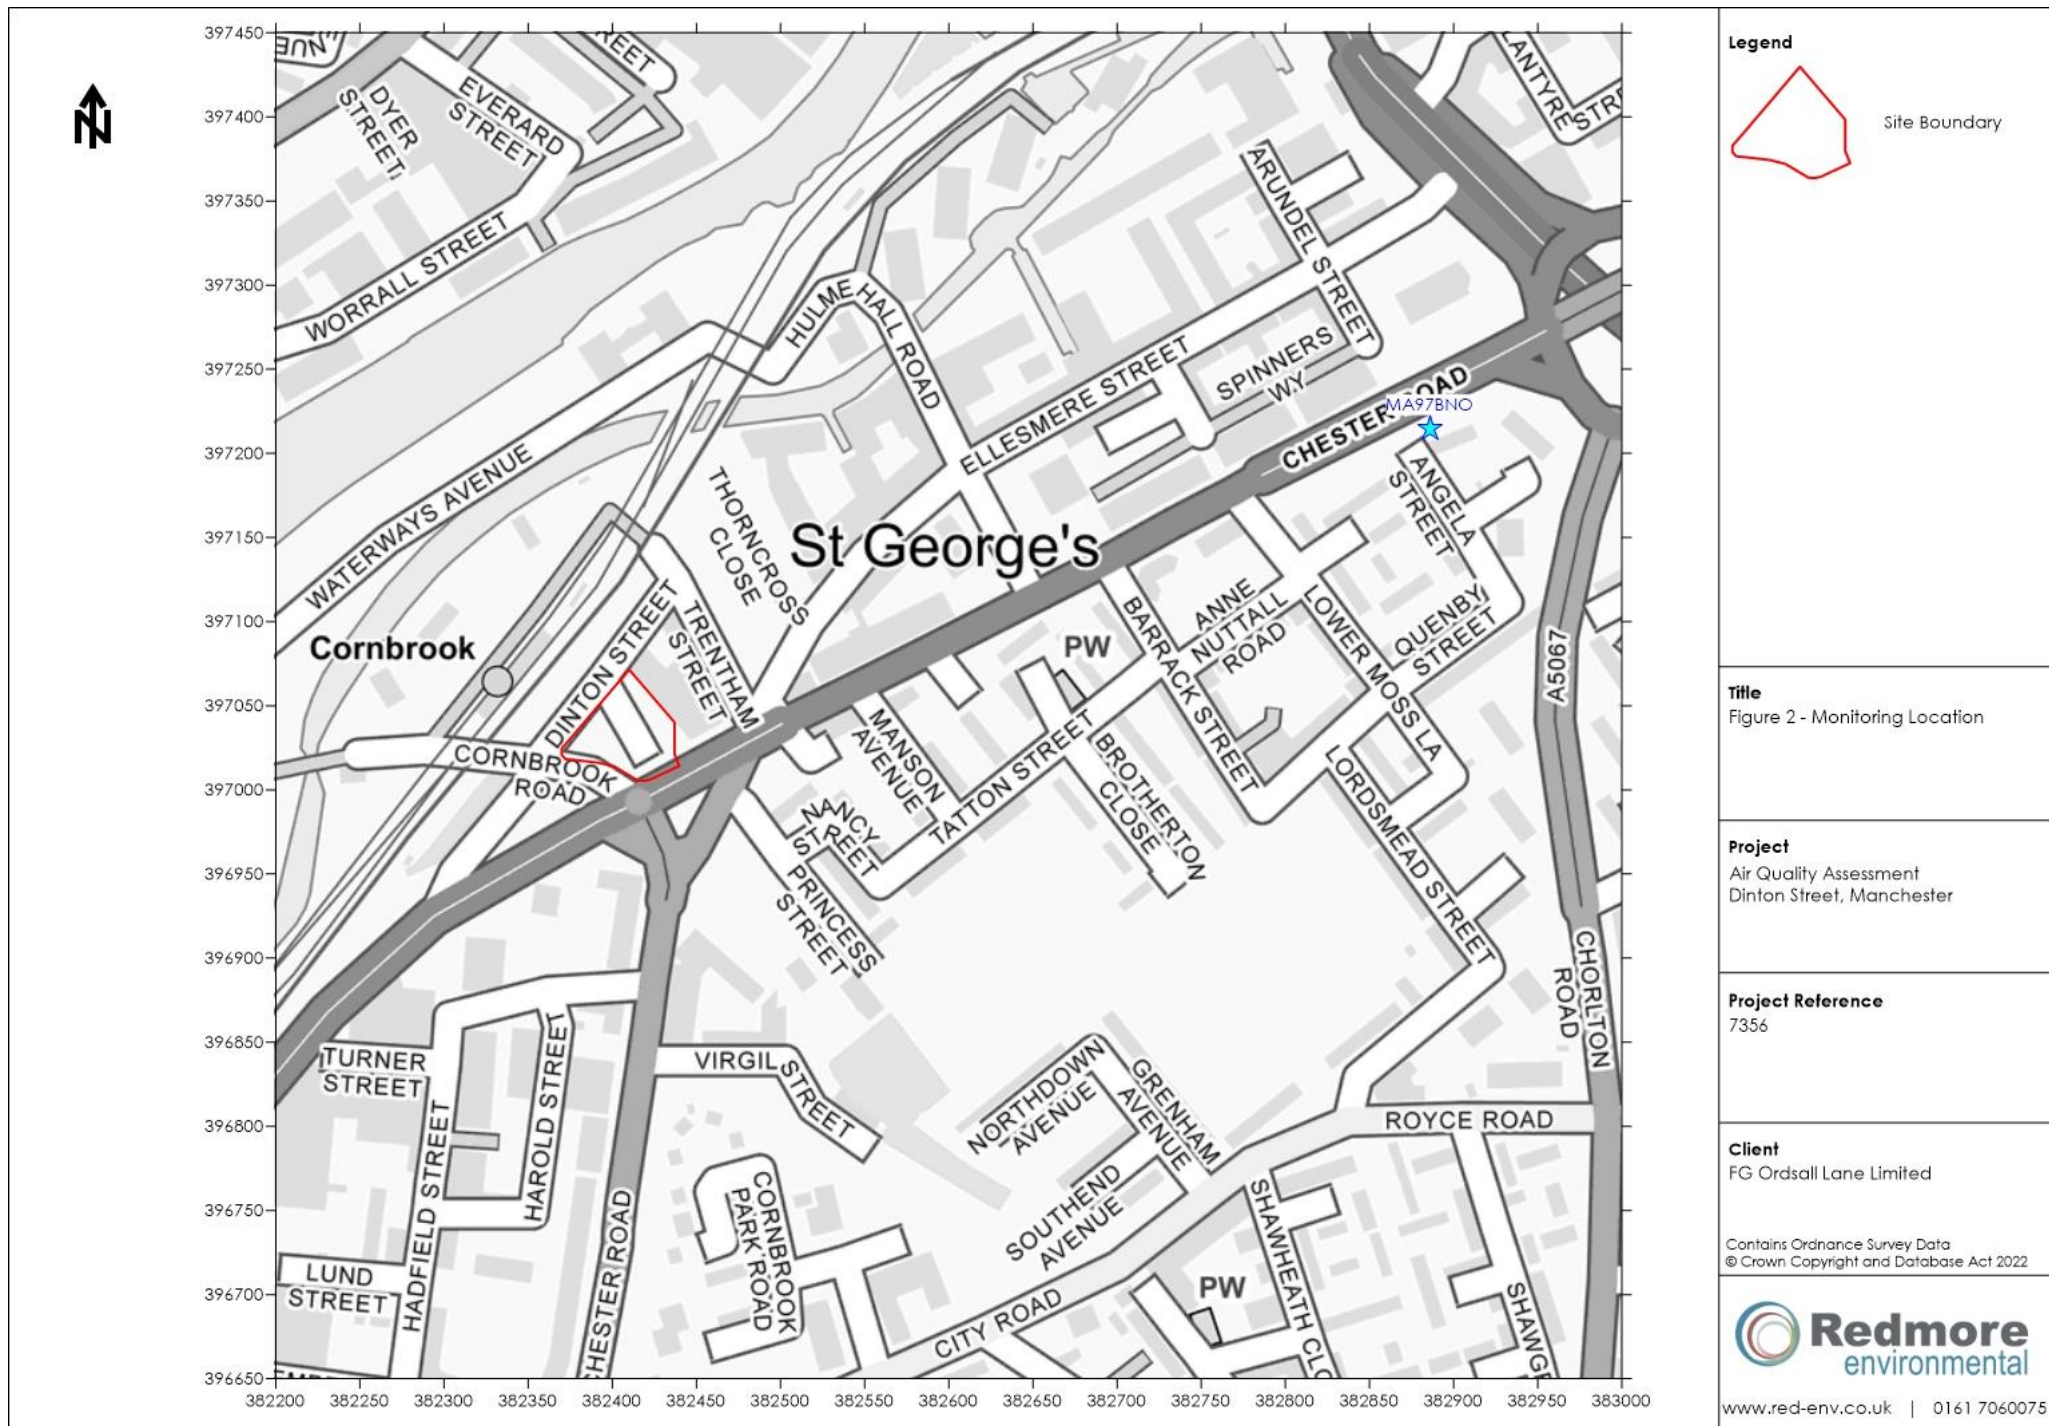

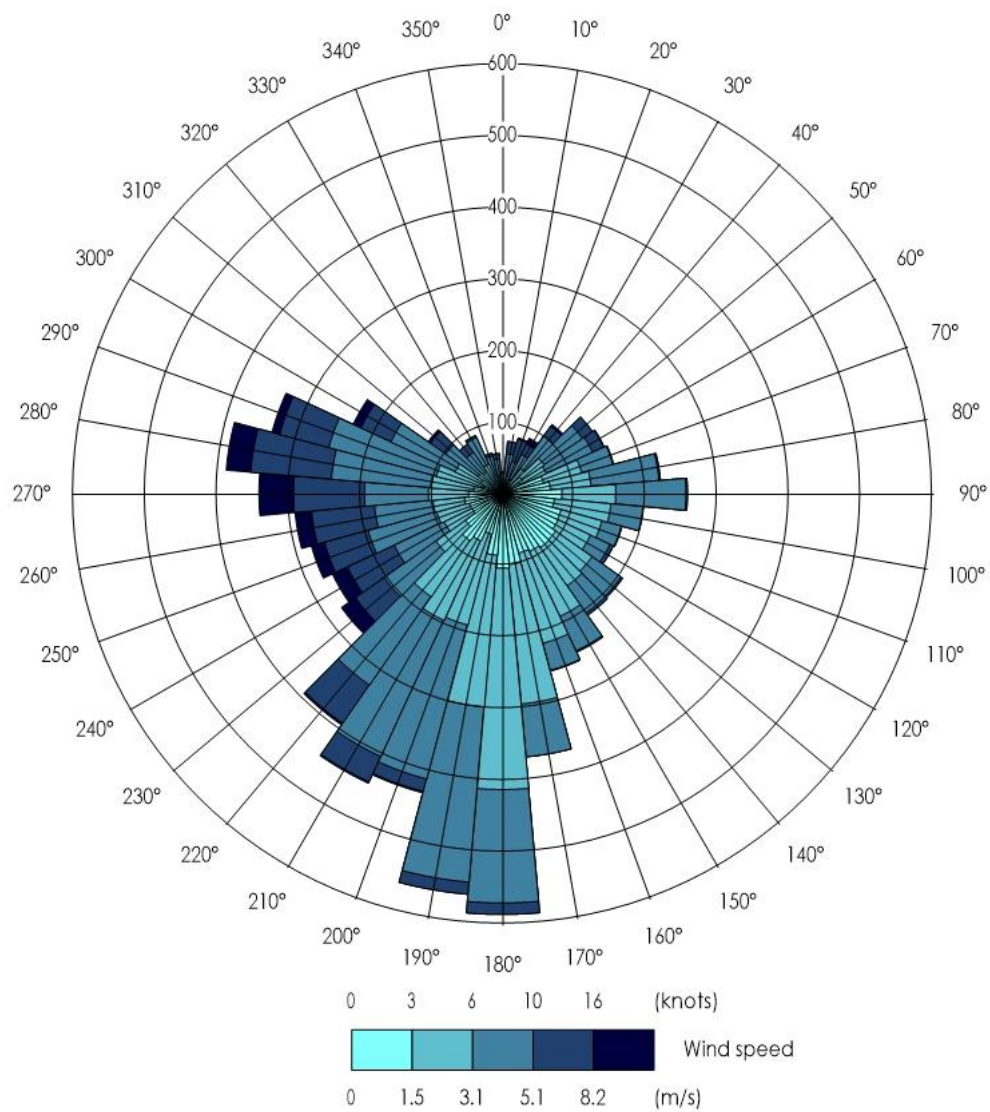

Legend

Title

Figure 3 - Wind Rose of 2019
Manchester Airport Meteorological
Data

Project

Air Quality Assessment
Dinton Street, Manchester

Project Reference

7356

Client

FG Ordsall Lane Limited



Legend



Site Boundary



Receptor

Title

Figure 4 - Road Vehicle Exhaust
Emissions Sensitive Receptor
Locations

Project

Air Quality Assessment
Dinton Street, Manchester

Project Reference

7356


Client


FG Ordsall Lane Limited

Contains Ordnance Survey Data
© Crown Copyright and Database Act 2022



www.red-env.co.uk | 0161 7060075

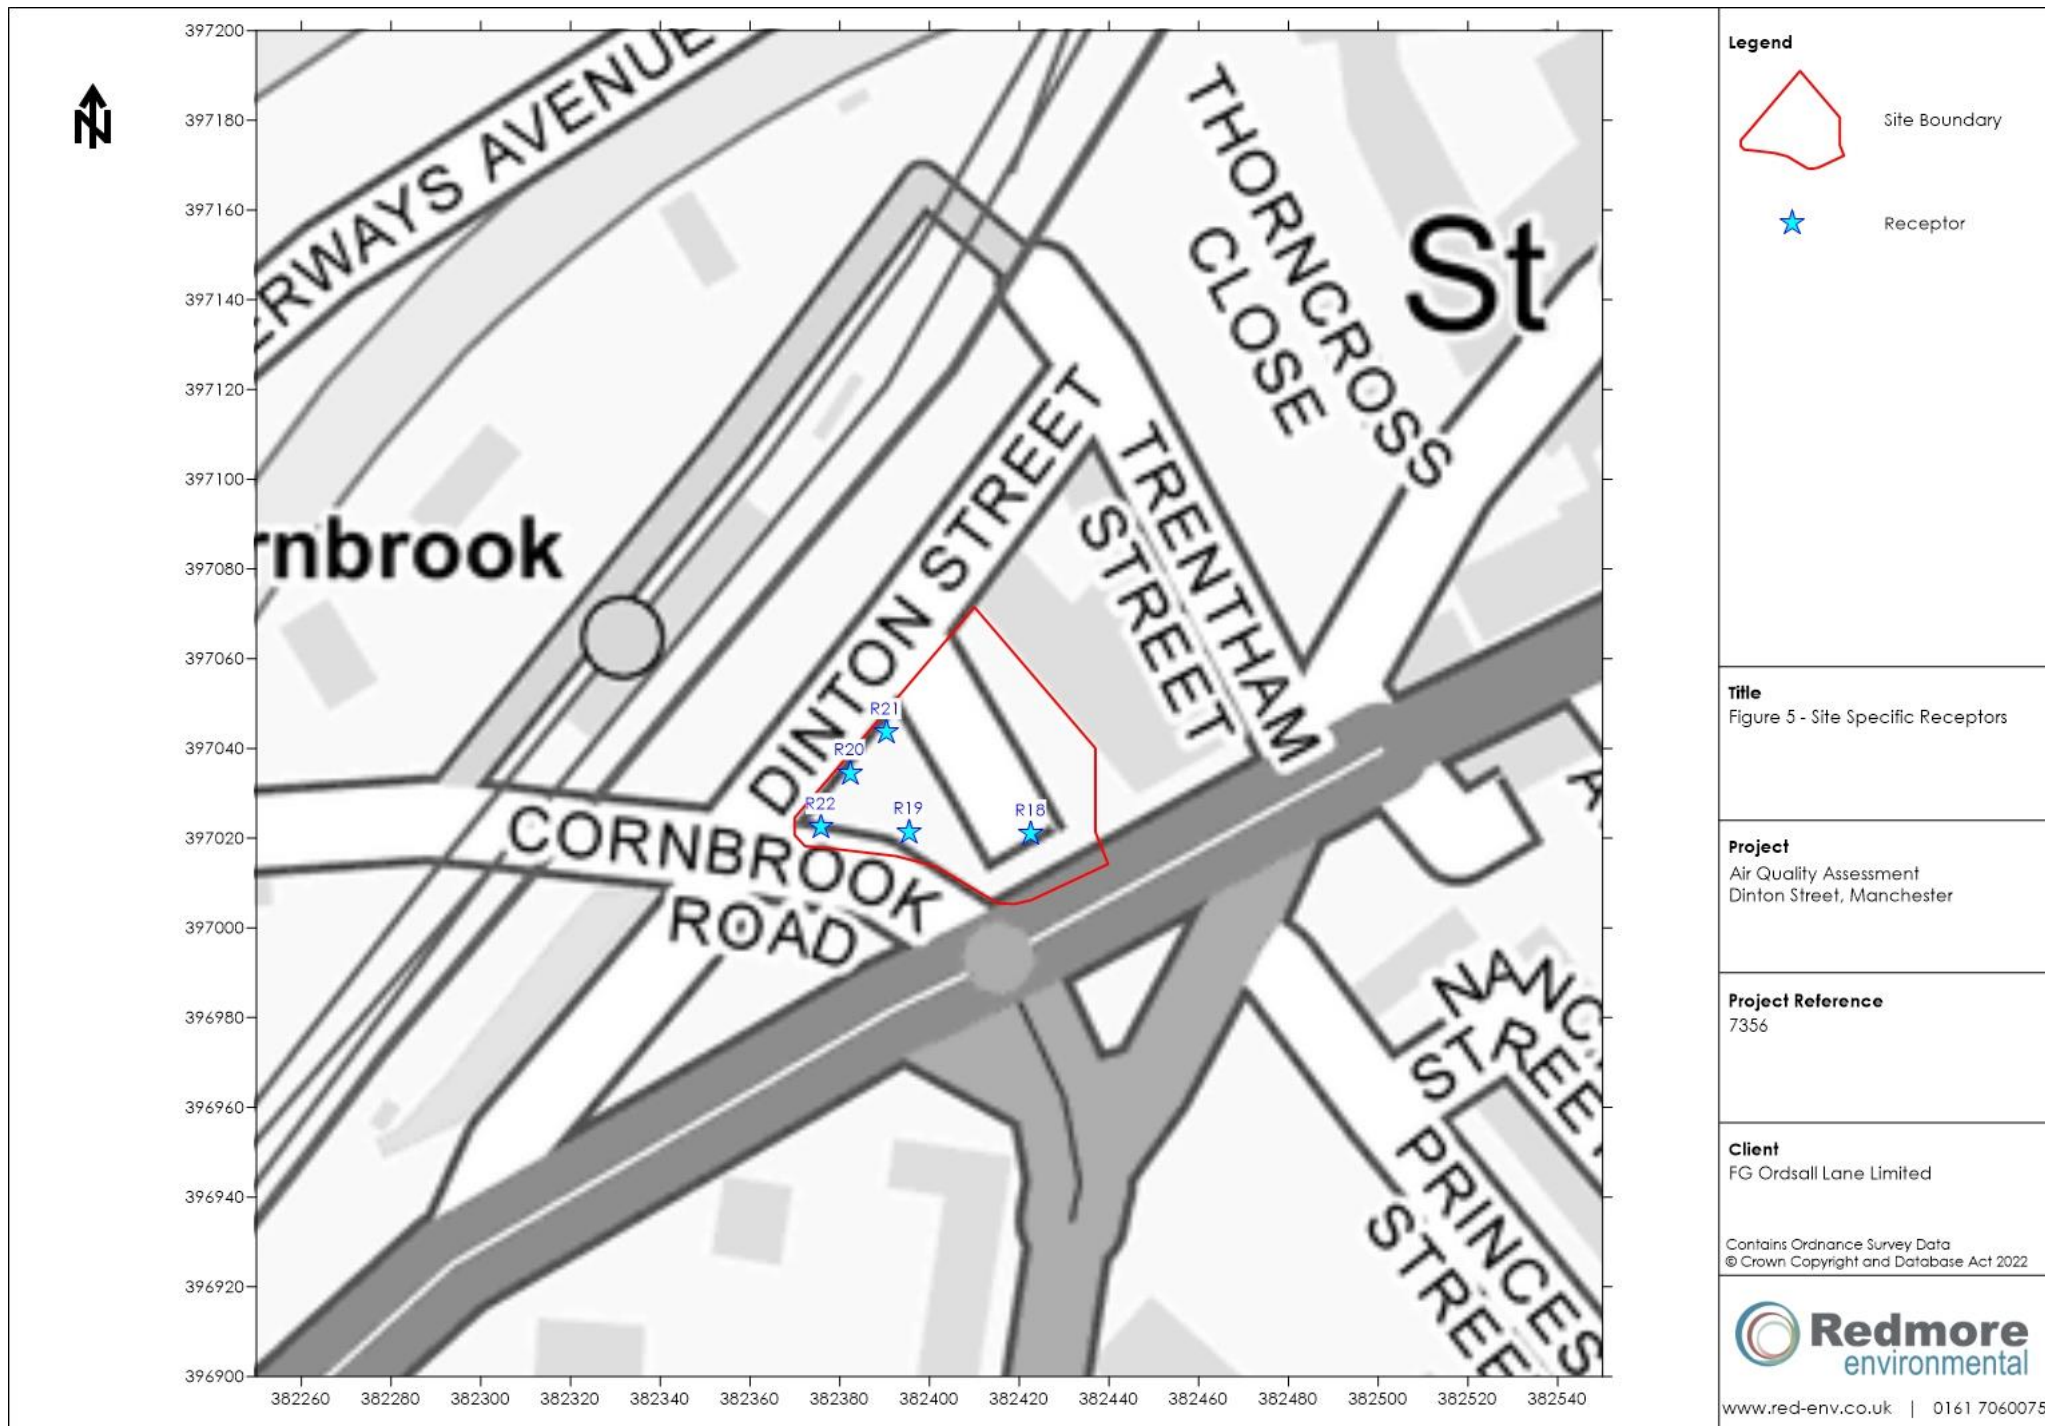

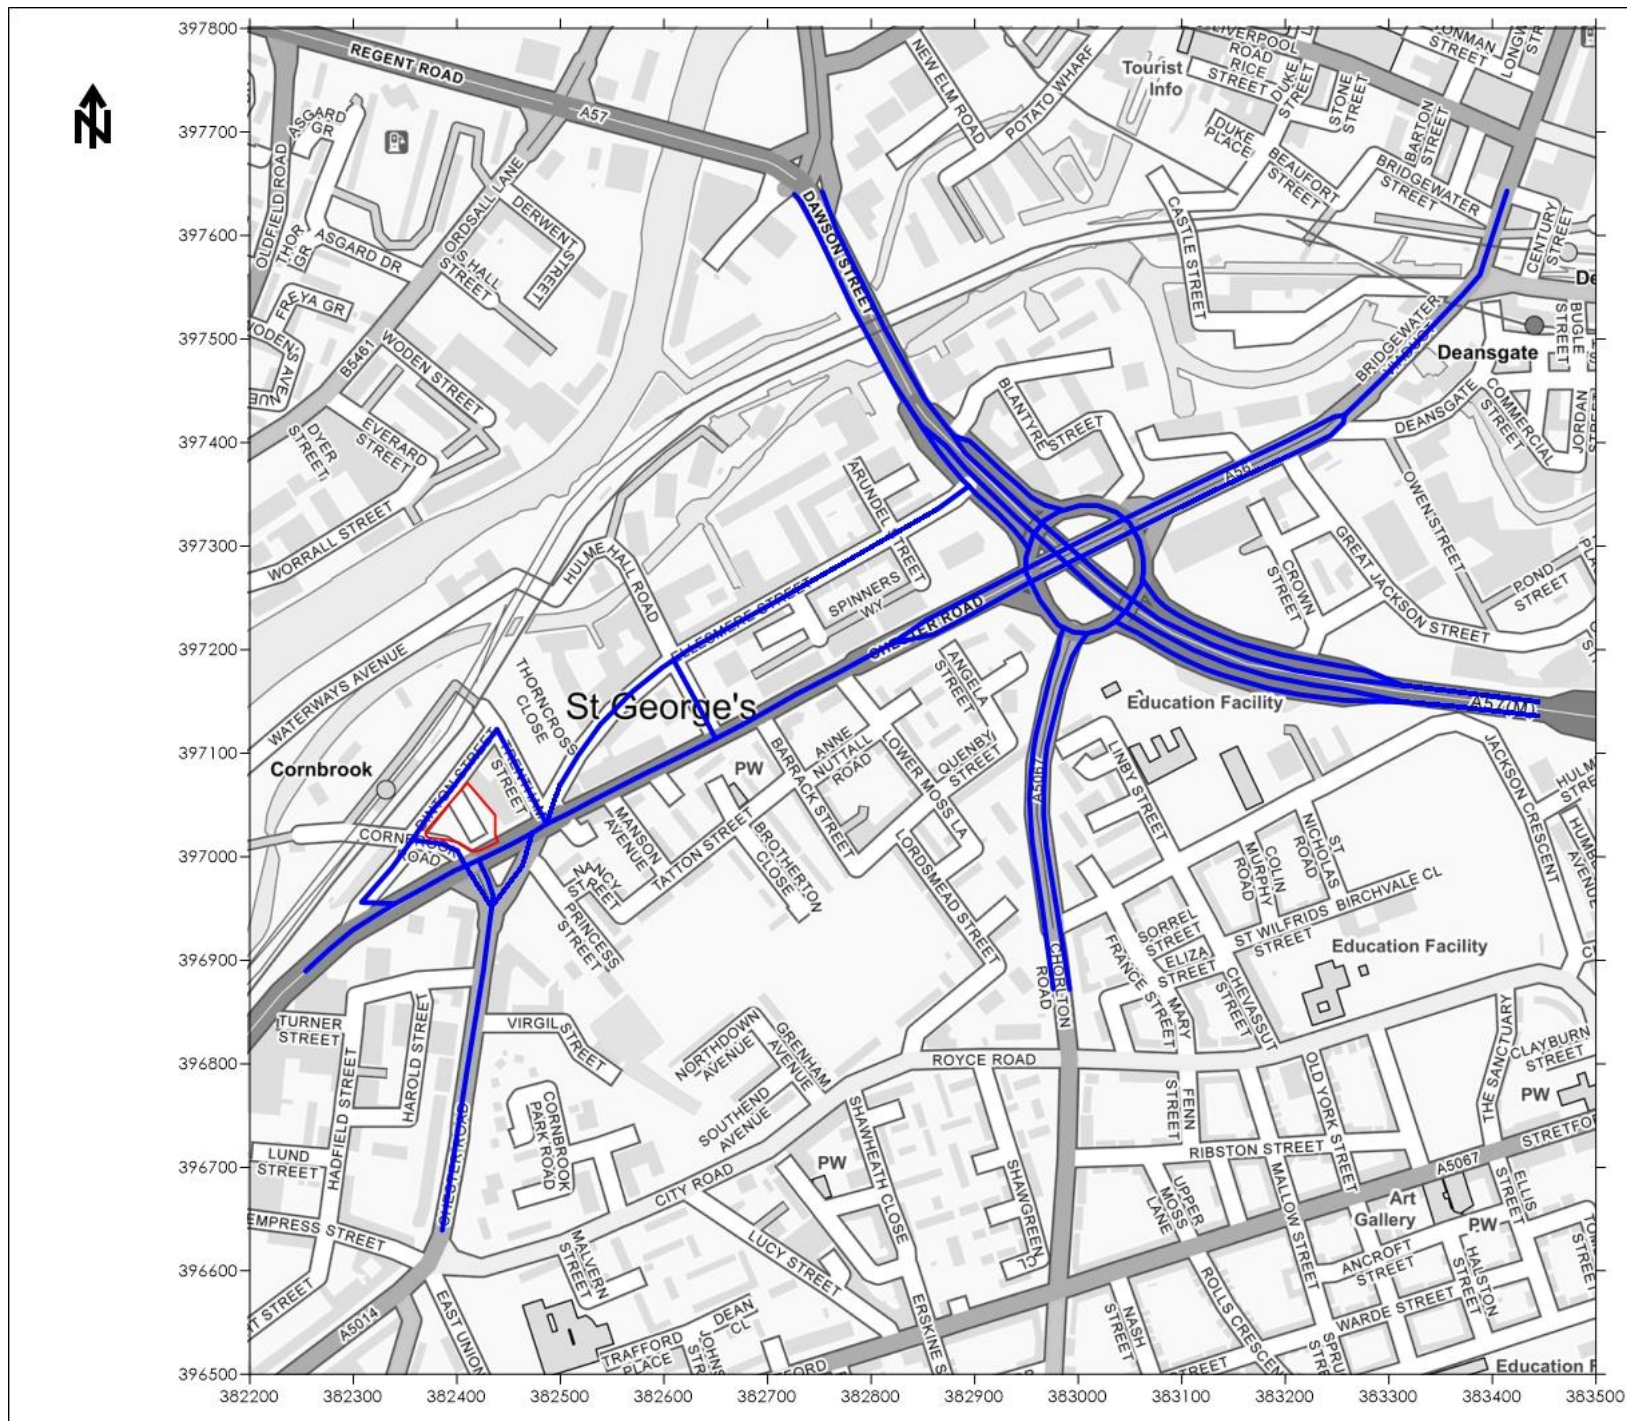

Legend



Title

Figure 6 - ADMS-Roads Inputs

Project

Air Quality Assessment
Dinton Street, Manchester

Project Reference

7356

Client

FG Ordsall Lane Limited

Contains Ordnance Survey Data
© Crown Copyright and Database Act 2022



www.red-env.co.uk | 0161 7060075

Appendix 1 - Assessment Input Data

Introduction

The proposed development has the potential to cause air quality impacts as a result of vehicles travelling to and from the site, as well as expose residents to elevated pollution levels. In order to assess NO₂, PM₁₀ and PM_{2.5} concentrations at sensitive locations, detailed dispersion modelling was undertaken in accordance with the following methodology.

Dispersion Model

Dispersion modelling was undertaken using the ADMS-Roads dispersion model (version 5.0.1.3). ADMS-Roads is developed by Cambridge Environmental Research Consultants (CERC) and is routinely used throughout the world for the prediction of pollutant dispersion from road sources. Modelling predictions from this software package are accepted within the UK by the Environment Agency and DEFRA.

The model requires input data that details the following parameters:

- Assessment area;
- Traffic flow data;
- Vehicle emission factors;
- Spatial co-ordinates of emissions;
- Street width;
- Meteorological data;
- Roughness length (z_0); and,
- Monin-Obukhov length.

The following Sections detail the relevant inputs utilised in the assessment.

Traffic Flow Data

Traffic data was provided by SK Transport Planning Ltd, the Transport Consultant for the project.

Information was not available from SK Transport Planning Ltd for a number of links within the model. Traffic data for these locations, including 24-hour Annual Average Daily Traffic (AADT) flows and fleet composition as HDV proportion, was therefore obtained from the Department for

Transport (DfT)²¹. The DfT web tools enables the user to view and download traffic flows on every link of the 'A' road and motorway network, as well as selected minor roads, in Great Britain for the years 1999 to 2022. It should be noted that the DfT web tool is referenced in DEFRA guidance²² as being a suitable source of data for air quality assessments and it is therefore considered to provide reasonable estimate of traffic flows in the vicinity of the site.

The baseline traffic data was converted to the site opening year utilising a factor obtained from TEMPro (version 8.0). This software package has been developed by the DfT to calculate future traffic growth throughout the UK.

Road widths and vehicle speeds were estimated from aerial photography and UK highway design standards. A summary of the traffic data used in the assessment is provided in Table A1.1.

Table A1.1 Traffic Data

Link		24-hour AADT Flow			HDV Prop. Of Fleet (%)	Road Width (m)	Avg. Vehicle Speed (km/h)
		2019	2027 DM	2027 DS			
L1	Chester Road	31,412	27,680	27,761	3.58	15.1	40
L2	Chester Road between Lower Moss Lane and Hulme Hall Road	31,412	27,680	27,761	3.58	11.3	40
L3	Bridgewater Way between Trantham Street and Chester Road	31,412	27,680	27,761	3.58	19.7	40
L4	Chester Road	8,851	8,554	8,577	3.65	12.8	40
L5	Dawson Street Slip On	5,936	6,511	6,524	3.85	6.8	30
L6	Dawson Street Slip Off	6,119	6,711	6,724	3.68	8.9	30
L7	Mancunian Way Slip Off	7,247	7,948	7,962	4.24	8.2	30
L8	Mancunian Way Slip On	7,375	8,089	8,102	4.36	9.1	30
L9	Ellesmere Street Approach to Dawson Street	4,521	4,959	4,959	3.87	6.6	25
L10	Ellesmere Street between Egerton Street and Bentinck Street	4,521	4,959	4,959	3.87	5.3	40

²¹ <https://roadtraffic.dft.gov.uk/#16/51.4518/-0.9760/basemap-countpoints>.

²² Local Air Quality Management (TG22) Technical Guidance, DEFRA, 2022.

Link		24-hour AADT Flow			HDV Prop. Of Fleet (%)	Road Width (m)	Avg. Vehicle Speed (km/h)
		2019	2027 DM	2027 DS			
L11	Ellesmere Street Approach to Bridgewater Way	4,521	4,959	4,959	3.87	7.5	25
L12	Bridgewater Way Junction Approach to Chester Road	4,426	4,277	4,288	3.65	7.4	25
L13	Chester Road Approach to Bridgewater Way	4,426	4,277	4,288	3.65	4.8	25
L14	Bridgewater Way West of Chester Road	23,823	23,527	23,589	3.33	20.2	40
L15	Bridgewater Way	23,823	23,527	23,589	3.33	8.1	40
L16	Ellesmere Street between Hulme Hall Road and approach to Bridgewater Way	4,521	4,959	4,959	3.87	5.3	40
L17	Chester Road between Hulme Hall Road and Ellesmere Street	31,412	27,680	27,761	3.58	11.3	40
L18	Ellesmere Street between Bentinck Street and Hulme Hall Lane	4,521	4,959	4,959	3.87	5.3	25
L19	Egerton Street slip road from Ellesmere Street	5,936	6,511	6,524	3.85	6.8	30
L20	Mancunian Way eastbound (EB) at Chester Road Roundabout	24,475	6,711	6,711	3.68	7.1	70
L21	Mancunian Way Southbound (SB) between Chester Road Roundabout and Medlock Street Roundabout	36,875	40,445	40,458	4.36	10.2	70
L22	Mancunian Way SB at Medlock Street Roundabout	23,746	6,511	6,511	3.85	7	70
L23	Mancunian Way northbound (NB) at Chester Road Roundabout	36,875	40,445	40,458	4.36	7.4	70
L24	Mancunian Way NB between Chester Road Roundabout and Medlock Street Roundabout	5,090	5,583	5,583	2.14	12	70
L25	Mancunian Way NB at Medlock Street Roundabout	6,699	7,347	7,347	1.94	7.3	70
L26	Bridgewater Viaduct north of Deansgate	15,764	17,290	17,317	3.13	11.1	50
L27	Bridgewater Viaduct EB between Chester Road roundabout and Deansgate	7,195	7,891	7,905	2.54	6.8	50

Link		24-hour AADT Flow			HDV Prop. Of Fleet (%)	Road Width (m)	Avg. Vehicle Speed (km/h)
		2019	2027 DM	2027 DS			
L28	Bridgewater Viaduct westbound (WB) between Great Jackson Street and Deansgate	8,569	9,398	9,412	3.64	6.5	50
L29	Bridgewater Viaduct WB between Chester Road Roundabout and Great Jackson Street	8,569	9,398	9,412	3.64	11.4	50
L30	Bridgewater Viaduct EB at Chester Road Roundabout	15,706	13,840	13,854	3.58	7.7	50
L31	Chester Road EB between Chester Road Roundabout and Lower Moss Lane	15,706	13,840	13,881	3.58	9.8	50
L32	Bridgewater Viaduct WB at Chester Road Roundabout	15,706	13,840	13,854	3.58	7.2	50
L33	Chester Road WB between Chester Road Roundabout and Lower Moss Lane	15,706	13,840	13,881	3.58	7.4	50
L34	Dawson Street SB	30,594	33,555	33,569	3.68	12.4	40
L35	Dawson Street NB	29,682	32,555	32,569	3.85	12.3	40
L36	Hulme Hall Road, approaching Ellesmere Street	4,521	4,959	4,959	3.87	8.9	40
L37	Hulme Hall Road	4,521	4,959	4,959	3.87	7.2	40
L38	Chester Road	17,702	17,108	17,153	3.65	8.4	40
L39	Dinton Street South	1,200	1,336	1,367	8.92	6.9	25
L40	Dinton Street North	461	822	1,009	1.93	5.3	25
L41	Trentham Street	172	255	295	2.66	6.2	25
L42	Cornbrook Street	1,566	1,757	1,874	6.69	7.2	25
R1	Chester Road roundabout	4,282	4,358	4,365	3.85	11.3	30

Reference should be made to Figure 6 for a graphical representation of the road link locations.

Emission Factors

Emission factors for each link were calculated using the relevant traffic flows and the Emissions Factor Toolkit (version 12.0.1). This has been produced by DEFRA and incorporates COPERT 5.6 vehicle emission factors and fleet information.

There is current uncertainty over NO₂ concentrations within the UK, with the implementation of new vehicle emission standards not resulting in the previously expected reduction in roadside levels. Therefore, 2019 emission factors were utilised in preference to the scheme opening year in order to provide robust model outputs. As predictions for 2019 were verified, it is considered the results are a robust indication of worst case concentrations for the future year.

Meteorological Data

Meteorological data used in the assessment was taken from Manchester Airport meteorological station over the period 1st January 2019 to 31st December 2019 (inclusive). Manchester Airport is located at NGR: 381792, 384116, which is approximately 12km south of the development. It is anticipated that conditions would be reasonably similar over a distance of this magnitude. The data was therefore considered suitable for an assessment of this nature.

All meteorological records used in the assessment were provided by Atmospheric Dispersion Modelling (ADM) Ltd, which is an established distributor of data within the UK. Reference should be made to Figure 3 for a wind rose of utilised meteorological data.

Roughness Length

The z_0 is a modelling parameter applied to allow consideration of surface height roughness elements. A z_0 of 1m was used to describe the modelling extents. This is considered appropriate for the morphology of the area and is suggested within ADMS-Roads as being suitable for 'cities, woodlands'.

A z_0 of 0.2m was used to describe the meteorological site. This value is considered appropriate for the morphology of the area and is suggested within ADMS-Roads as being suitable for 'agricultural areas (min)'.

Monin-Obukhov Length

The Monin-Obukhov length provides a measure of the stability of the atmosphere. A minimum Monin-Obukhov length of 30m was used to describe both the modelling extents and the meteorological site. This value is considered appropriate for the nature of both areas and is suggested within ADMS-Roads as being suitable for 'cities and large towns'.

Background Concentrations

Annual mean background NO₂, PM₁₀ and PM_{2.5} concentrations for use in the assessment were obtained from the DEFRA mapping study for the grid square containing the site, as shown in Table 12.

NO_x to NO₂ Conversion

Predicted annual mean NO_x concentrations were converted to NO₂ concentrations using the spreadsheet (version 8.1) provided by DEFRA, which is the method detailed within DEFRA guidance²³.

Verification

The predicted results from a dispersion model may differ from measured concentrations for a large number of reasons, including:

- Estimates of background concentrations;
- Uncertainties in source activity data such as traffic flows and emission factors;
- Variations in meteorological conditions;
- Overall model limitations; and,
- Uncertainties associated with monitoring data, including locations.

Model verification is the process by which these and other uncertainties are investigated and where possible minimised. In reality, the differences between modelled and monitored results are likely to be a combination of all of these aspects.

²³ Local Air Quality Management Technical Guidance (TG22), DEFRA, 2022.

For the purpose of the assessment, model verification was undertaken for 2019 using traffic data, meteorological data and monitoring results from this year. The choice of 2019 as the verification year aligns with the IAQM position statement 'Use of 2020 and 2021 Monitoring Datasets'²⁴, which states:

"If you are carrying out an air quality study that includes validation against monitoring data, use 2019 monitoring data as the last typical year"

Monitoring of NO₂ concentrations was undertaken at one location within the vicinity of roads included in the model during 2019. The result was obtained and the road contribution to total NO_x concentration calculated following the methodology contained within DEFRA guidance²⁵. The monitored annual mean NO₂ concentration and calculated road NO_x concentration is summarised in Table A1.2.

Table A1.2 Verification - Monitoring Result

Monitoring Location	Monitored NO ₂ Concentration (µg/m ³)	Calculated Road NO _x Concentration (µg/m ³)
MA97BNO	32.30	18.85

The annual mean road NO_x concentration predicted from the dispersion model and the 2019 road NO_x concentration calculated from the monitoring result is summarised in Table A1.3.

Table A1.3 Verification - Modelling Result

Monitoring Location	Calculated Road NO _x Concentration (µg/m ³)	Modelled Road NO _x Concentration (µg/m ³)
MA97BNO	18.85	10.62

The monitored and modelled road NO_x concentrations were compared to calculate the associated ratio. This indicated that a verification factor of 1.7746 was required to be applied to all road NO_x modelling results.

²⁴ Use of 2020 and 2021 Monitoring Datasets, IAQM, 2021.

²⁵ Local Air Quality Management Technical Guidance (TG22), DEFRA, 2022.

Monitoring of PM₁₀ and PM_{2.5} concentrations is not undertaken within the assessment extents. The NO_x verification factor was therefore used to adjust model predictions of these species in lieu of more accurate data in accordance with DEFRA guidance²⁶.

²⁶ Local Air Quality Management Technical Guidance (TG22), DEFRA, 2022.

Appendix 2 - Curricula Vitae

KEY EXPERIENCE:

Jethro is a Chartered Environmentalist and Director of Redmore Environmental with specialist experience in the air quality and odour sectors. His key capabilities include:

- Production and management of Air Quality, Dust and Odour Assessments for a wide-range of clients from the retail, residential, infrastructure, commercial and industrial sectors.
- Production and co-ordination of Environmental Permit applications for a variety of industrial sectors.
- Detailed dispersion modelling of road vehicle and industrial emissions using ADMS-Roads, ADMS-5, AERMOD-PRIME and BREEZE-ROADS. Studies have included impact assessment of ground level pollutant and odour concentrations and assessment of suitability of development sites for proposed end-use.
- Project management and co-ordination of Environmental Impact Assessments and scoping reports for developments throughout the UK.
- Provision of expert witness services at Planning Inquiries.
- Design and project management of pollutant monitoring campaigns.
- Co-ordination and management of large-scale multi-disciplinary projects and submissions.
- Provision of expert advice to local government and international environmental bodies, as well as involvement in production of industry guidance.

SELECT PROJECTS SUMMARY:

Industrial

Shanks Waste Management - Odour Assessments of two waste management facilities to support Environmental Permit Applications.

Tatweer Petroleum - dispersion modelling of Bahrain oil field.

Doha South Sewage Treatment Works - AQA for works extension in Qatar.

IRIS Environmental Appraisal Report Reviews, Isle of Man Government - odour assessment reviews.

Lankem, Greater Manchester - Environmental Permit Application for chemical manufacturing plant.

Newport Docks Bulk Drying, Pelleting and CHP Facility - air quality EIA for gas CHP.

Springshades, Leicester - Environmental Permit Variation Application for textile manufacturing plant.

Valspar, Chester - Odour Assessment and production of Odour Management Plan for a paint manufacturing plant in response to neighbour complaints.

Agrivert - dispersion modelling of odour and CHP emissions from numerous AD plants.

James Cropper Paper Mill, Cumbria - air quality EIA, Environmental Permit Variation and Human Health Risk Assessment for new biomass boiler adjacent to SSSI.

Rigg Approach, Leyton - Air Quality Assessment in support of waste transfer site.

Lynchford Lane Waste Transfer Station - biomass facility energy recovery plant.

Barnes Wallis Heat and Power, Cobham - biomass facility adjacent to AQMA.

Residential

Wood St Mill, Bury - residential development adjacent to scrap metal yard.

Hyams Lane, Holbrook - Odour Assessment to support residential development adjacent to sewage works.

North Wharf Gardens, London - peer review of EIA undertaken for large residential development.

Loxford Road, Alford - Air Quality EIA for residential development, included consideration of impacts from associated package sewage works

Elephant and Castle Leisure Centre - baseline AQA for redevelopment.

Carr Lodge, Doncaster - EIA for large residential development.

Queensland Road, Highbury - residential scheme including CHP.

Bicester Ecotown - dispersion modelling of energy centre.

Castleford Growth Delivery Plan - baseline air quality constraints assessment for town redevelopment.

York St, Bury - residential development adjacent to AQMA.

Temple Point Leeds - residential development adjacent to M1.

Commercial and Retail

Etihad Stadium - Air Quality EIA for the extension to the capacity of the Etihad Stadium, Manchester.

Wakefield College - redevelopment of city centre campus in AQMA.

Manchester Airport Cargo Shed - commercial development.

Manchester Airport Apron Extension - EIA including aircraft emission modelling.

National Youth Theatre, Islington - redevelopment to provide new arts space and accommodation.

LAUREN CASEY

Senior Air Quality Consultant



BSc (Hons), GradIEMA

Tel: 0161 706 0075 | Email: lauren.casey@red-env.co.uk

KEY EXPERIENCE:

Lauren is an Environmental Consultant with specialist experience in the air quality sector. Her key capabilities include:

- Production of Air Quality Assessments in accordance with Department for Environment, Food and Rural Affairs (DEFRA) methodologies for a range of residential, commercial and industrial sectors.
- Detailed dispersion modelling of road vehicle exhaust emissions using ADMS-Roads. Studies have included assessment of road traffic exhaust emissions on sensitive receptors and exposure of new residents to poor air quality.
- Advanced Canyon Modelling to evaluate the impact of altered urban topography on air quality in built up areas.
- Assessment of construction dust impacts from a range of development sizes.
- Production of air quality mitigation strategies specifically tailored to address issues at individual sites.
- Definition of baseline air quality and identification of sensitive areas across the UK.
- Odour surveys to assess amenity and suitability of sites for potential future development for residential use.

SELECT PROJECTS SUMMARY:

Circle Court Tower, Stretford

Air Quality Assessment for the refurbishment of the existing Circle Court Tower in Stretford, Greater Manchester, to provide improved apartments for occupants. Concerns were raised regarding the exposure of future occupants to poor air quality due to road traffic emissions from vehicles using Junction 9 of the M60 motorway, adjacent to the site. Dispersion modelling was undertaken to quantify pollution levels at several different heights reflective of residential units within the development. Predicted concentrations were below the relevant Air Quality Objectives (AQO) at all sensitive locations across the development. Mitigation in the form of mechanical ventilation was therefore not required.

Greenbrow Road, Wythenshawe

Air Quality Assessment in support of a residential development of 56 units and associated infrastructure. The proposals involved demolition of hard standings prior to construction of low rise dwellings. An assessment of fugitive dust emissions was undertaken and the results indicated that the use of good practice control measures would provide suitable mitigation for the impacts of the scheme.

The Grange, Handforth

Co-ordination and management of a 3-month study in order to determine baseline conditions and identify any potential issues at a residential estate. Concerns were raised regarding the exposure of residents to poor air quality due to road traffic emissions from the new Manchester Airport Relief Road. The results of the monitoring identified nitrogen dioxide (NO₂) concentrations to be below the AQO.

Copeley Hill, Birmingham

Air Quality Assessment in support of proposed residential apartments and dwellings within an Air Quality Management Area (AQMA). A two-staged assessment was undertaken involving a three month diffusion tube study and subsequent dispersion modelling using ADMS-Roads. Predicted concentrations indicated elevated pollution levels at residential units along the site boundary. As such, suitable mitigation in the form of mechanical ventilation has been specified for the relevant dwellings in order to protect future residents from poor air quality.

Clinton Place Car Park, Sunderland

Air Quality Assessment in support of a proposed surface car park on land at Clinton Place, Sunderland. The development has potential to cause air quality impacts at sensitive locations during construction and operation. Detailed dispersion modelling was therefore undertaken to consider the potential impact of the development on air quality at sensitive receptor locations within the vicinity of the site. This included emissions for the local road network and vehicles on the car park itself. Results indicated that impacts were predicted to be negligible at all sensitive receptor locations. Suitable mitigation to control potential impacts associated with fugitive dust releases during construction were also identified.

KEY EXPERIENCE:

Emily is an Associate Director with specialist experience in the air quality sector. Her key capabilities include:

- Production of Air Quality Assessments in accordance with Department for Environment, Food and Rural Affairs (DEFRA) methodologies for a range of residential, commercial and industrial sectors.
- Detailed dispersion modelling of road vehicle and industrial emissions using ADMS-Roads and ADMS-5. Studies have included impact assessment of ground level pollutant and odour concentrations and assessment of suitability of development sites for proposed end-use.
- Project management and co-ordination of Environmental Impact Assessments and scoping reports for developments throughout the UK.
- Assessment of fugitive dust impacts from a range of mineral extraction developments.
- Assessment of petrol stations to address benzene concentrations and their impact on adjacent developments.
- Production of air quality mitigation strategies specifically tailored to address issues at individual sites.
- Assessment of potential effects associated with network realignment schemes and highway developments.

SELECT PROJECTS SUMMARY:

Broad Street, Birmingham

Air Quality Assessment in support of a residential-led development on land at Broad Street, Birmingham. The proposals were located adjacent to a section of the Midland Metro Westside which runs along Broad Street. Consideration was made to the potential for re-alignment of the local road network as a result of the Metro to effect pollution levels at the development. The assessment indicated NO₂ concentrations exceeded air quality criteria from ground to third floor level as a result of road vehicle exhaust emissions. Mitigation was therefore specified for the affected units.

Home Farm, Forest Road, Warfield

Ecological Air Quality Assessment in support of a residential development. Natural England held concerns regarding potential impacts at sensitive ecological designations as a result of traffic exhaust emissions associated with the development. The predicted change in NO_x and ammonia concentrations and nitrogen and acid deposition was below the relevant criteria at all locations within the ecological designations. Impacts were therefore not considered to be significant.

Saltcoats Road, Stevenston

Air Quality Assessment in support of an educational campus and associated energy centre. Impacts associated with emissions from the proposed gas and biomass boilers were assessed through detailed dispersion modelling. This indicated impacts on annual mean NO₂ and PM₁₀ concentrations were predicted to be not significant.

Blackthorn & Piddington

Environmental Impact Assessment in support of a railway embankment scheme on land at the Network Railway Embankment between Piddington and Blackthorn. Due to the extensive stabilisation works a Fugitive Dust Emissions Assessment was undertaken in addition to consideration of road vehicle exhaust emissions. Due to the location of the site in relation to nearby sensitive receptors, potential impacts associated with construction works were not considered to be significant.

Blackmoorfoot Road, Huddersfield

Air Quality in support of a residential-led development in close proximity to an operational minerals facility. Due to the presence of the Johnsons Wellfield Quarry to the south of the site a Fugitive Dust Emissions Assessment was undertaken to determine potential impacts. Dispersion modelling of road vehicle exhaust emissions was also undertaken in support of the scheme. Results indicated the overall significance of fugitive dust emissions from the quarry and air quality impacts associated with operation of the development itself were not significant.

Lockwood Bar, Huddersfield

Air Quality Assessment for the proposed highway realignment scheme along Lockwood Road, Huddersfield. Changes in pollution levels were considered at sensitive receptors as a result of variations to road geometry and associated redistribution of vehicle trips across the local area. Results of the dispersion modelling study indicated air quality impacts as a result of the scheme were not significant.