LIGHTING KEY

LIGHTING - L



L

MANUFACTURER: LDL LIGHTING
PRODUCT: LEILA S (SPOTLIGHT)
LIGHT SIZE: 62(DIA) X 130(L)MM
FINISH COLOUR: RAL 9005
EMERGENCY LIGHT: NO

LIGHTING - L08 & L08/E



L08 / L08/E

MANUFACTURER: LDL LIGHTING
PRODUCT: DOMINIQUE (SUSPENDED)
LIGHT SIZE: 180(DIA) X 260(H)MM
FINISH COLOUR: RAL 9005
EMERGENCY LIGHT: NO

LIGHTING - L01



L1

MANUFACTURER: MILLIE
PRODUCT: TRACK (3 PHASE + DALI)
TRACK SIZE: 32(W) X 38(H)MM
TRACK LENGTH: 1500MM, 2000 & 3000MM
FINISH COLOUR: RAL 9005
EMERGENCY LIGHT: EM (TACK SPOT)

LIGHTING - L09 & L09/E



L09 / L09/E

MANUFACTURER: LDL LIGHTING
PRODUCT: DARCEY DOWNLIGHT (RECESSED)
LIGHT SIZE: 120(DIA) X 89(H)MM
FINISH COLOUR: COLOUR MATCHED TO CEILING COLOUR
EMERGENCY LIGHT: L09/E

LIGHTING - L01/E - L07/E



L01 - L06

MANUFACTURER: MILLIE
PRODUCT: LINEAR SUSPENDED
LIGHT SIZE: 57(W) X 75(H)MM
LUMINAIRE LENGTH:
L01 - 1410MM **L05 -** 2530MM
L02 - 1690MM **L06 -** 2820MM
L03 - 1970MM **L07 -** 3090MM
L04 - 2250MM

/E - EMERGENCY LIGHT
FINISH COLOUR: RAL 9005

LIGHTING - EM TRACK



EM

MANUFACTURER: LDL LIGHTING
PRODUCT: EM TRACK LUMINAIRE
LIGHT SIZE: 330(L)MM X 50(W)MM
FINISH COLOUR: RAL 9005 (BLACK)
EMERGENCY LIGHT: YES

CEILING TYPES KEY

CEILING TYPE - CT01
CAT A (BRUNTWOOD)

CEILING SUBSTRATE: CONCRETE
MANUFACTURER: BRITISH GYPSUM
CEILING REFERENCE: N/A
REQUIRED FIRE RATING: N/A
CEILING HEIGHT: NOMINAL 50MM
BOARD: 12.5MM WALLBOARD

CEILING TYPE - CT02
CAT B (CONTRACTOR)

CEILING SUBSTRATE: CONCRETE
MANUFACTURER: BRITISH GYPSUM
CEILING REFERENCE: C100016 (EN)
REQUIRED FIRE RATING: N/A
CEILING HEIGHT: 2300MM
BOARD: 15MM WALLBOARD
ASSESSORIES: CONCEALED ACCESS PANEL
SPIRAL AIR DIFFUSER

BULKHEAD - BH01

CEILING SUBSTRATE: CONCRETE
CEILING TYPE REFERENCE: CT01
BULKHEAD LOCATION: RED LINE

BULKHEAD - BH02

CEILING SUBSTRATE: CONCRETE
CEILING TYPE REFERENCE: CT02
BULKHEAD LOCATION: BLUE LINE

CEILING SYMBOLS KEY

P3
CP ELECTRONICS EBR-CPIR-
DALI LIGHTING DETECTOR

S
SMOKE DETECTOR
(SURFACE MOUNTED)

S
OPTICAL SMOKE DETECTOR & SOUNDER
(SURFACE MOUNTED)

H
HEAT DETECTOR
(SURFACE MOUNTED)

MANUAL CALL POINT
(WALL MOUNTED)

PD
LIGHT MODULE - (E1)
TYPE: RECESSED FITTING

SPIRAL DIFFUSER
CEILING SUBSTRATE: PLASTERBOARD CEILING
DIFFUSER: METAL SPIRAL DIFFUSER
SIZE: MEP CONTRACT TO CONFIRM SIZE
FINISH COLOUR: TO MATCH CEILING COLOUR
DRAWING: SA_131 (04) 303 & (04) 304 (CEILING FINISHES)

EXIT
SIGNAGE MODULE - (EXIT)
TYPE: SUSPENDED OR WALL MOUNTED
ILLUMINATED: YES

CCTV
(SURFACE MOUNTED)

SPK
SPEAKERS
TYPE: SURFACE MOUNTED

FLXX
FEATURE LIGHTING - (GREEN)
TYPE: CEILING / FLOOR MOUNTED
REFER: AXI LIGHTING DOCMENT

FLXX
LIGHT MODULE
TYPE: WALL MOUNTED
REFER: AXI LIGHTING DOCUMENT

ACCESS PANEL
CEILING SUBSTRATE: PLASTERBOARD CEILING
MANUFACTURER: CONTRACTORS CHOICE
SIZE: 600 X 600MM
ACESS PANEL TYPE: CONCEALED (BEADED)
FINISH: PLASTERBOARD (PAINT FINISH)
QUANTITY: XXNO.

1 **L05 - REFLECTED CEILING PLAN**
1 : 100


PRESENCE DETECTORS TO BE SET TO ABSENCE MODE. WALL SWITCH TO BE INSTALLED.

PRESENCE DETECTORS

SCENE SETTING CONTROLLER TO PROVIDE 4 SCENES PLUS MANUAL DIMMING

LUMINAIRES SWITCHED VIA MANUAL SWITCH

NOTE:
ALL PERIMETER FITTINGS TO BE DAYLIGHT DIMMABLE VIA. PRESENCE DETECTOR.

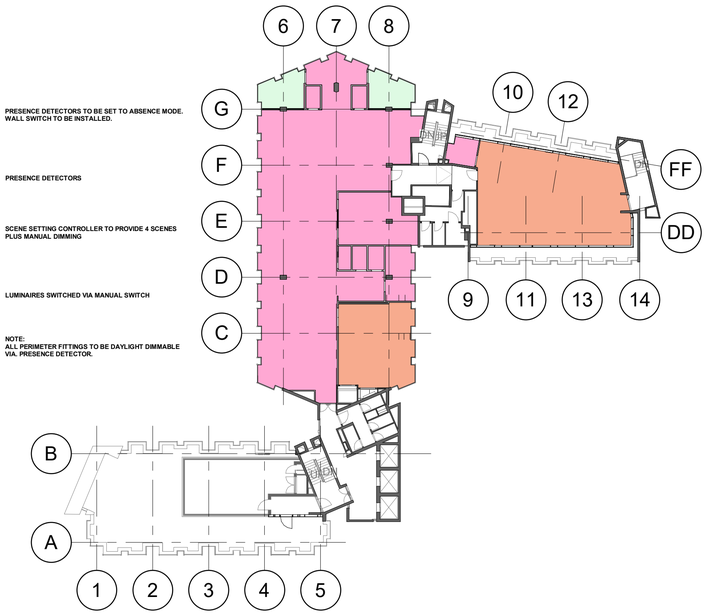

2 **5TH FLOOR GA PLAN - LIGHT ZONING KEY**
1 : 300

0 0.5m 1m 2m 3m 4m

ORIGINAL A1

\Drawing Note

DO NOT SCALE FROM THIS DRAWING. ALL DIMENSIONS TO BE CHECKED ON SITE. (DRAWINGS MAYBE SCALED FOR LOCAL AUTHORITY & PLANNING PURPOSE ONLY)

Copyright Protected. STAMP ARCHITECTS LIMITED
Company Registration No. 12034339

FOR PLANNING

\Site Visit | \Site Visit Date

\Project Notes

EXISTING INFORMATION BASED ON EXISTING CAD BUILDING SURVEY PROVIDED

ALL DIMENSIONS SHOULD BE CHECKED PRIOR TO ANY FABRICATION, MANUFACTURERING OR INSTALLATION

\Consultant | \Consultant Drawing Ref.:

GENERAL NOTES:

LIGHTING INSTALLATION NOTES (OFFICE SPACE)
GENERAL
ALL LIGHTING DESIGN AND INSTALLATION WORKS SHALL BE UNDERTAKEN BY A SUITABLY QUALIFIED AND COMPETENT CONTRACTOR.

THE LIGHTING SYSTEM SHALL BE DESIGN-AND-BUILD, WITH THE CONTRACTOR RESPONSIBLE FOR DETAILED DESIGN WITH REFERENCE TO LDL LIGHTING CALCULATIONS; TO BE SUBMITTED TO AND APPROVED BY THE CLIENT AND CONTRACT ADMINISTRATOR PRIOR TO PROCUREMENT AND INSTALLATION.

LIGHTING NOTES (OFFICE SPACE – DESIGN & BUILD)
LIGHTING INSTALLATION TO BE DESIGN-AND-BUILD BY SPECIALIST CONTRACTOR, FOR CLIENT APPROVAL PRIOR TO INSTALLATION.

ALL WORKS TO COMPLY WITH BUILDING REGS PART L2, B, M, BS 7671, BS 5266, BS EN 12464-1, AND CIBSE LG7.

ALL INTERNAL LIGHTING TO BE HIGH-EFFICIENCY LED, WITH MINIMUM 95 LUMINAIRE LUMENS/CIRCUIT WATT.

AUTOMATIC CONTROLS TO INCLUDE:

PIR SENSORS IN OFFICES, WCS, CORRIDORS, AND STORES & LIGHTING SCENES TO CERTAIN ROOM

DAYLIGHT DIMMING NEAR WINDOWS

TIME CONTROLS/MANUAL OVERRIDES WHERE REQUIRED

EMERGENCY LIGHTING TO COMPLY WITH BS 5266-1:

3-HOUR DURATION

1 LUX ON ESCAPE ROUTES / 0.5 LUX OPEN AREAS

COVERAGE TO INCLUDE EXITS, STAIRS, FIRE POINTS & TOILETS >8M²

LIGHTING DESIGN TO SUPPORT PART M ACCESSIBILITY AND VISUAL COMFORT PER LG7.

CONTRACTOR TO COMMISSION AND TEST ALL SYSTEMS. PROVIDE AS-BUILT INFO, O&M MANUALS, AND CONTROL SCHEDULES ON COMPLETIO

\Rev	\By	\Description	\Date
06	DJ	ISSUED FOR LISTED BUILDING APPLICATION	29/08/25
05	DJ	ISSUED FOR TENDER	04/07/25
04	DJ	UPDATED LIGHTING LAYOUT TO ALIGN WITH LATEST SET OF COMMENTS FROM AXI	05/06/25
03	DJ	WORK IN PROGRESS	27/05/25
02	DJ	1ST ATTEMPT LOCATIONS OF AXIR DIFFUSERS WITHIN NF CEILINGS FOR DISCUSSION WITH MEP DESIGNER	17/04/25
01	DJ	UPDATED ACCESS RAMPS TO LATEST SRA DRAWINGS WITH UPDATES TO ROOM NAMES & NUMBERING	28/03/25

STAMP ARCHITECTS

\Project Info
\Site Address: 61 KING STREET, MANCHESTER, GREATER MANCHESTER, M2 4PD
\Client Name: GUNNERCOOKE

\Drawing Info
(PR) 5TH FLOOR - RCP PLAN

\Drawing Ref

\Date	\Scale	\Sheet Size
29/11/24	As indicated	A1

\Project No.	\Drawing No.	\Revision
SA_131	(04) 302	06