


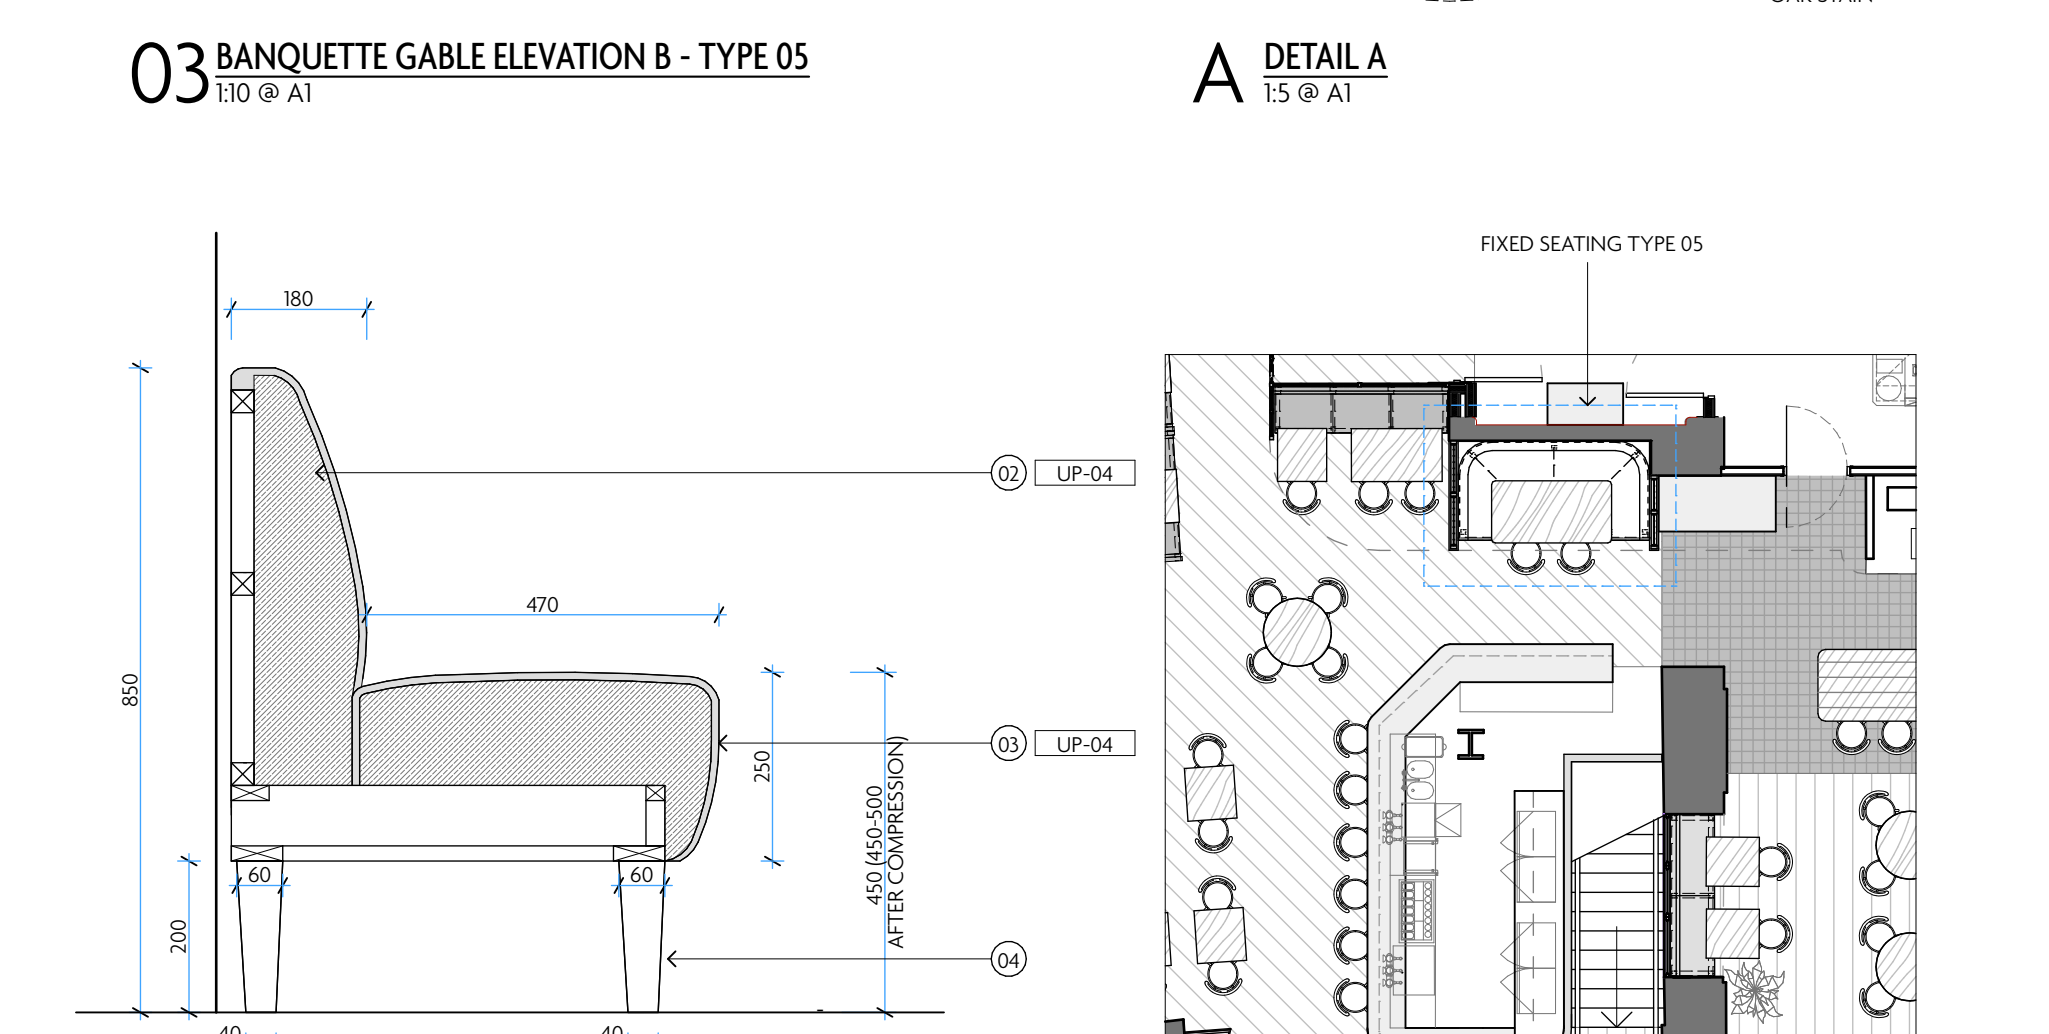
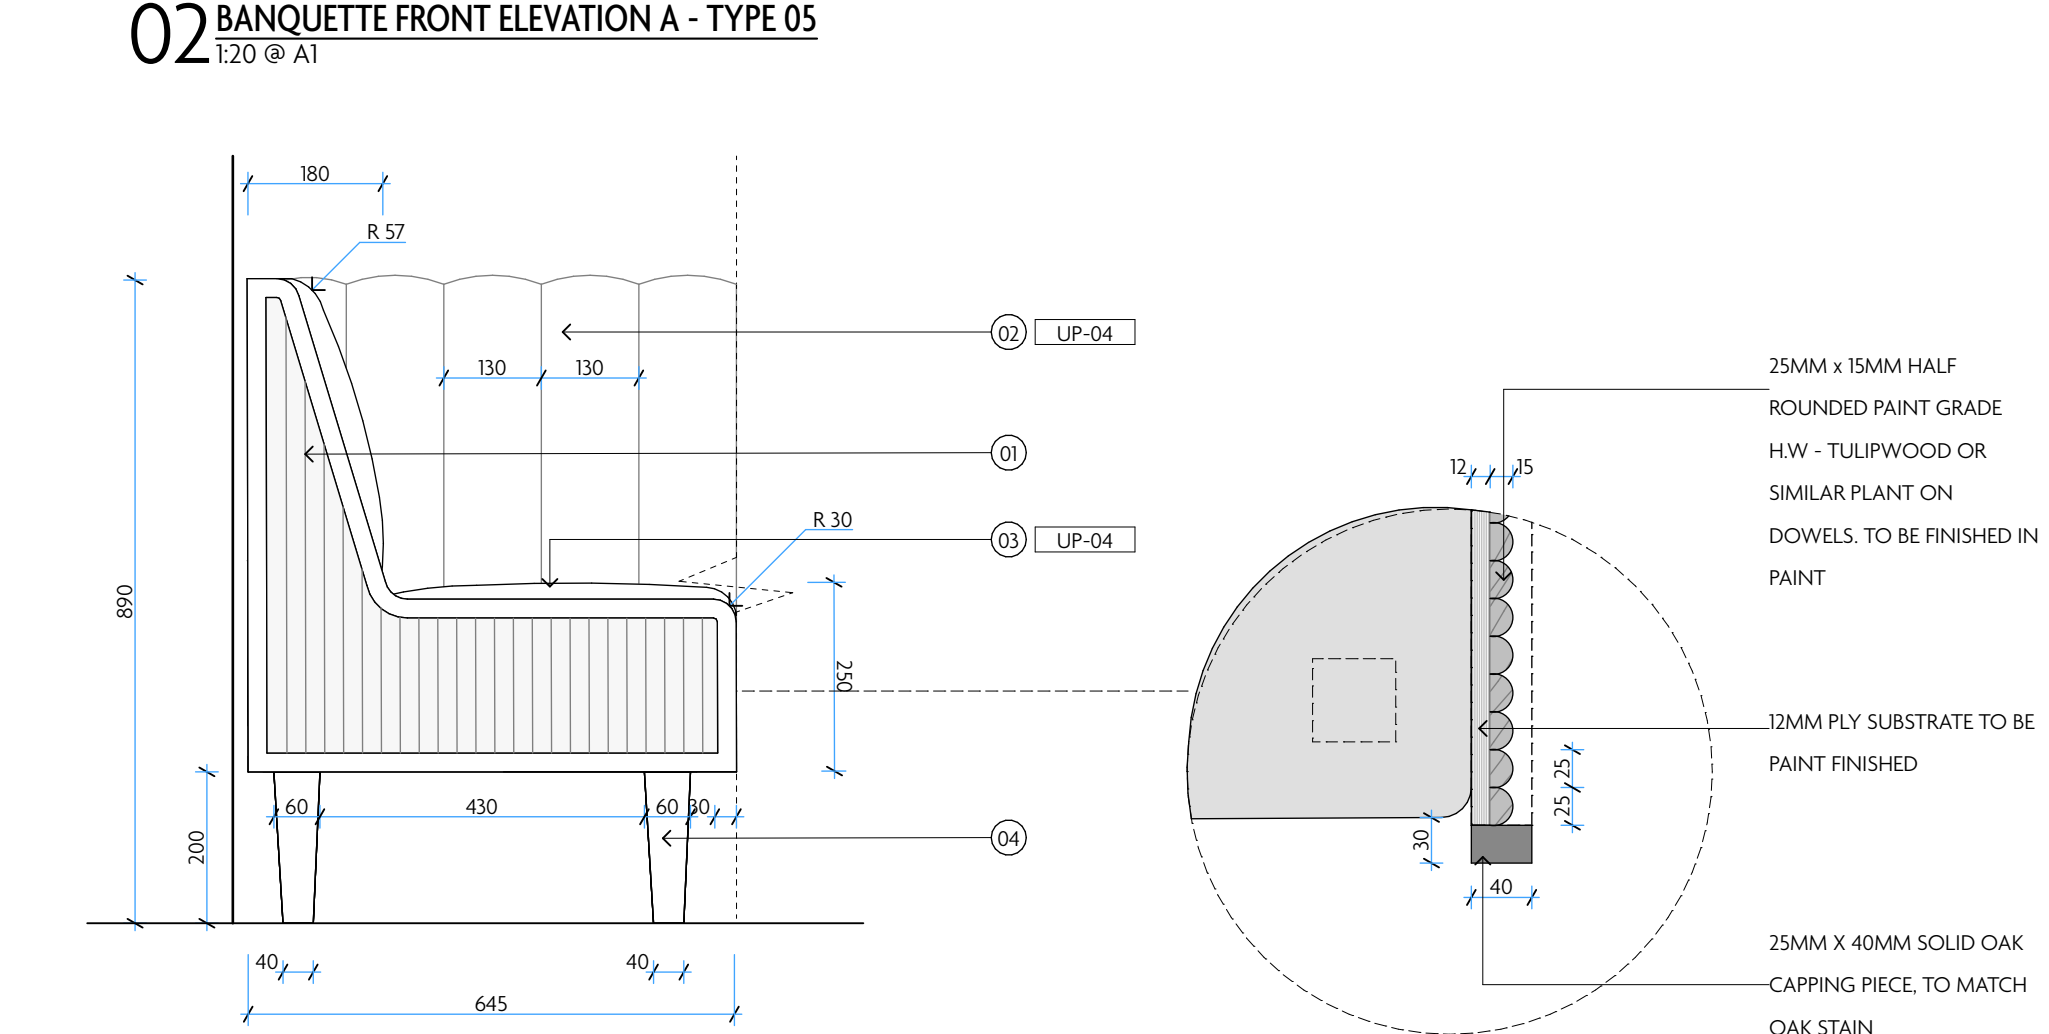
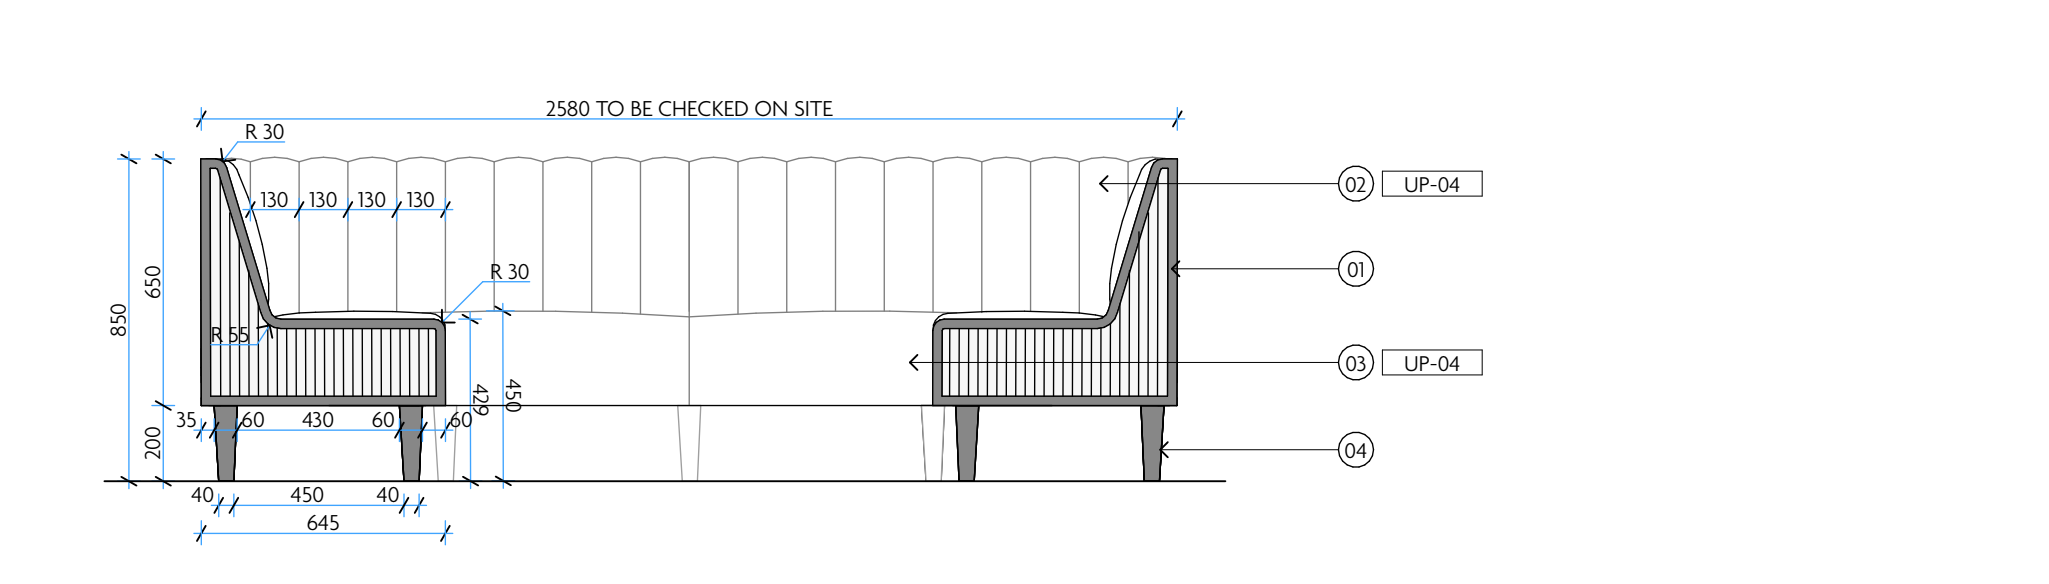
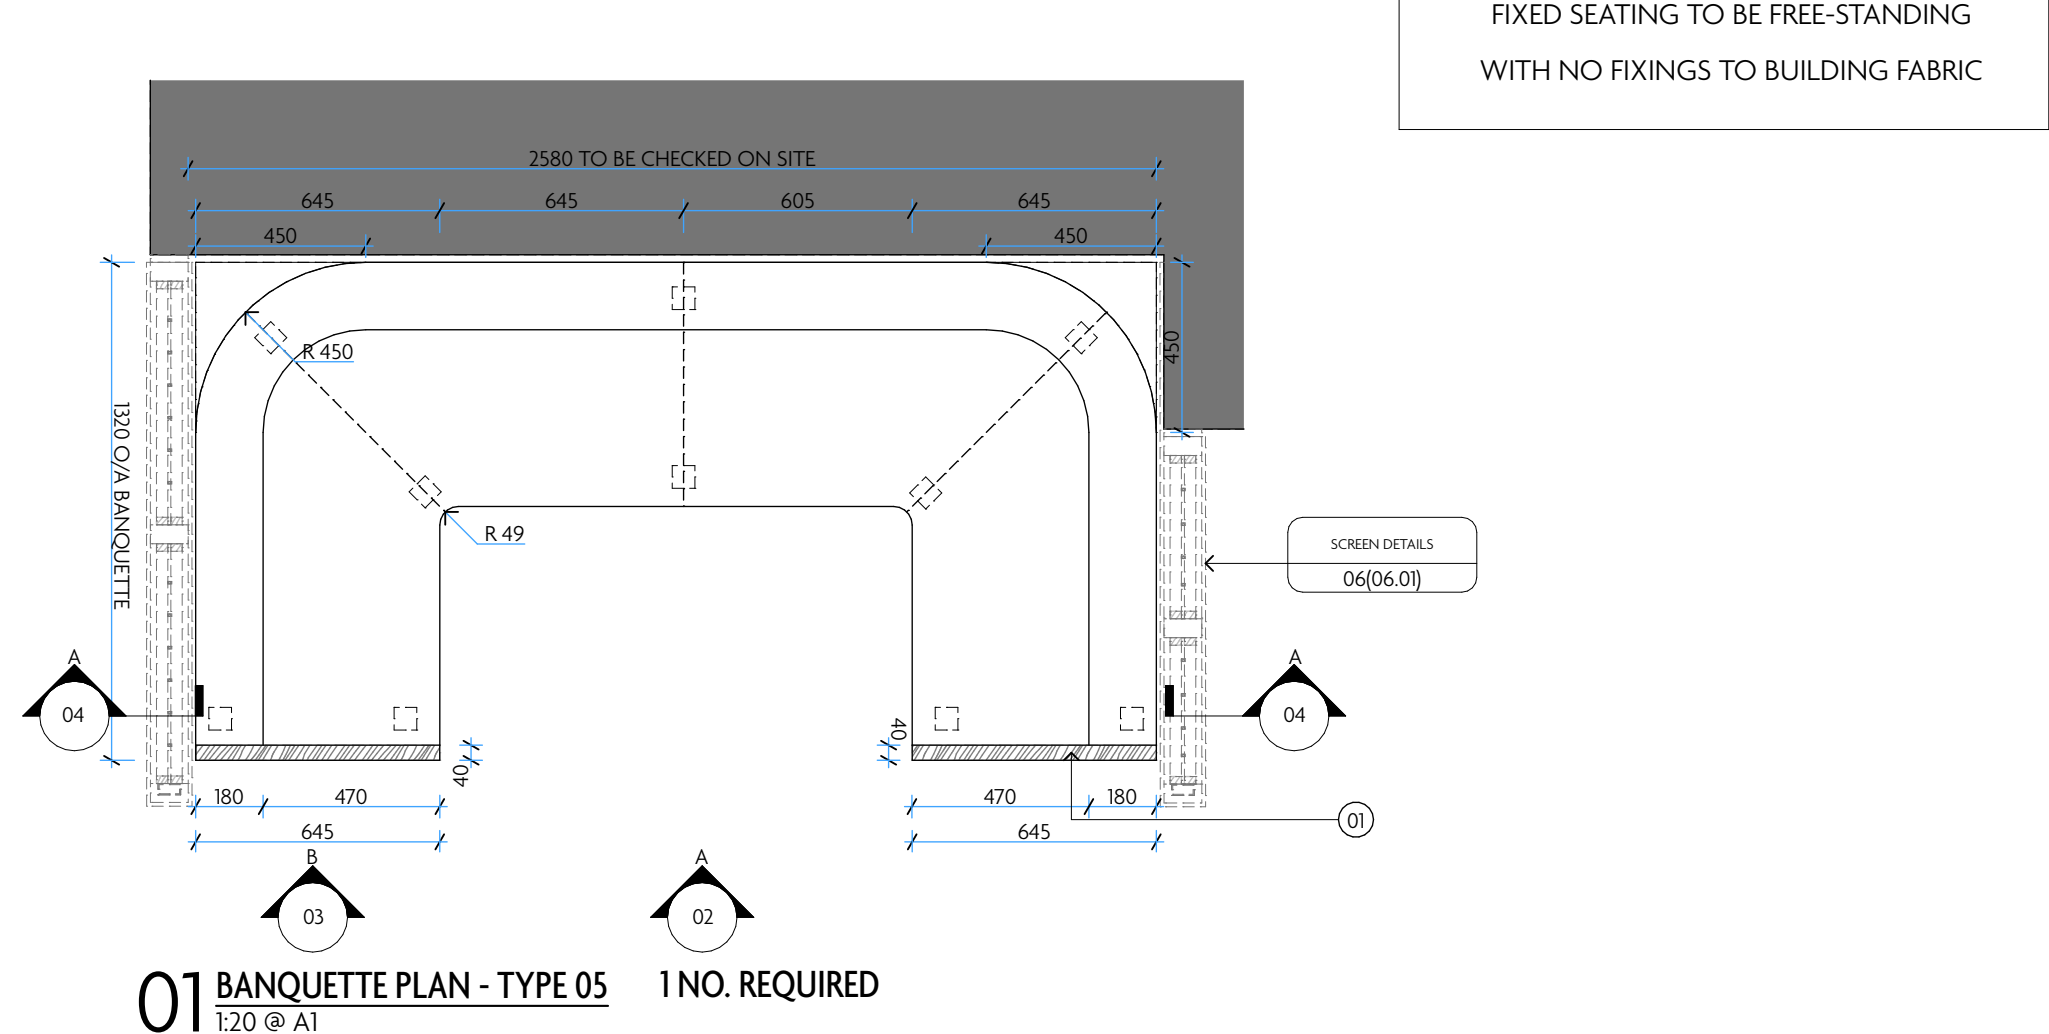
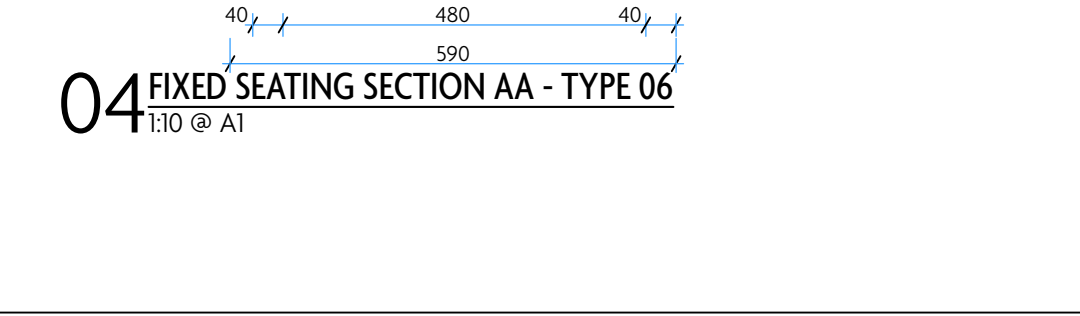
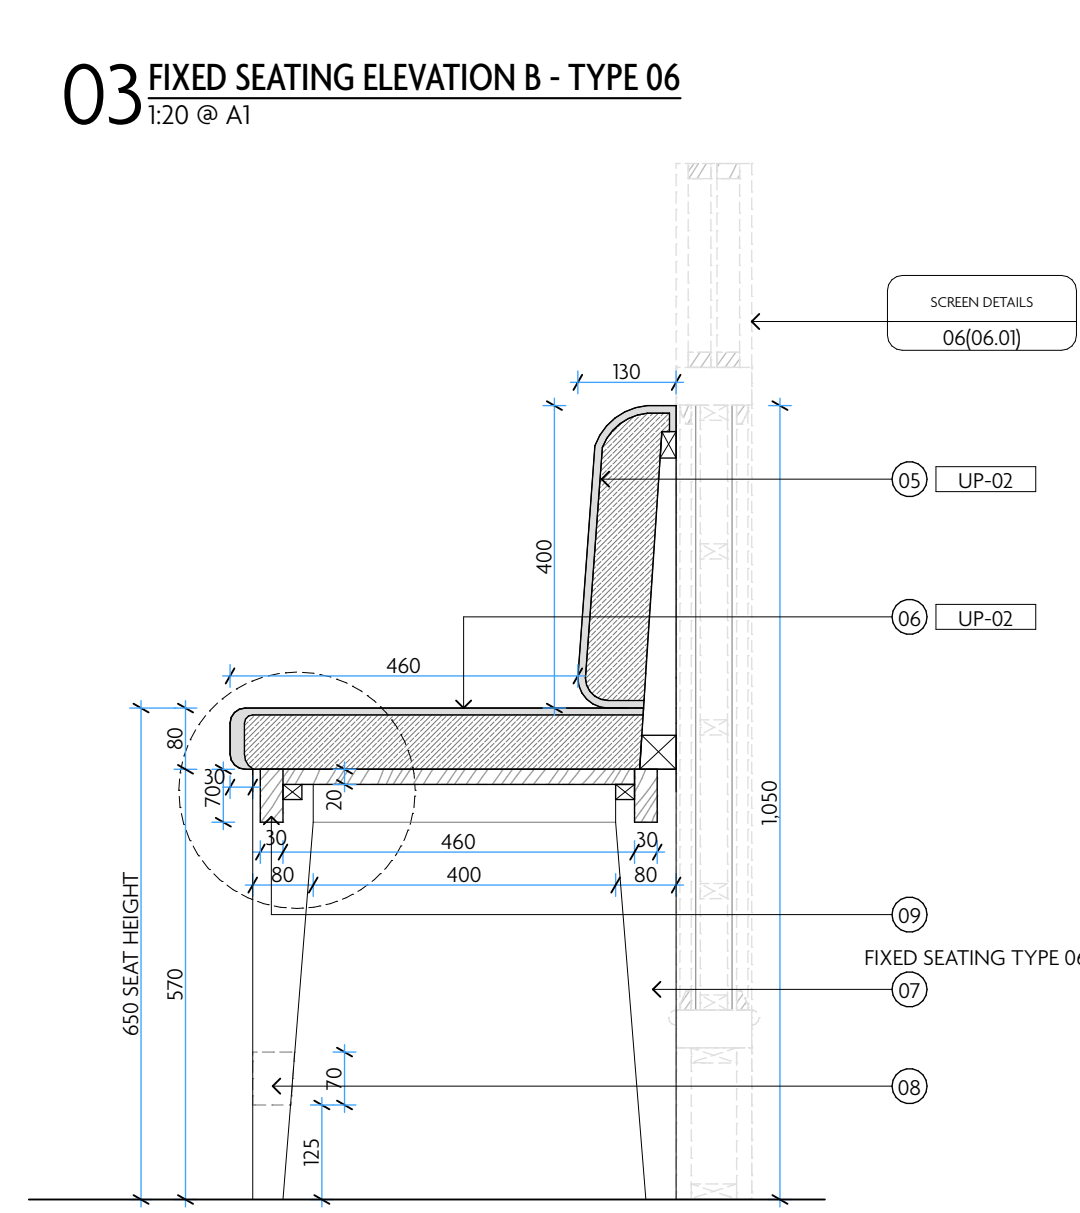
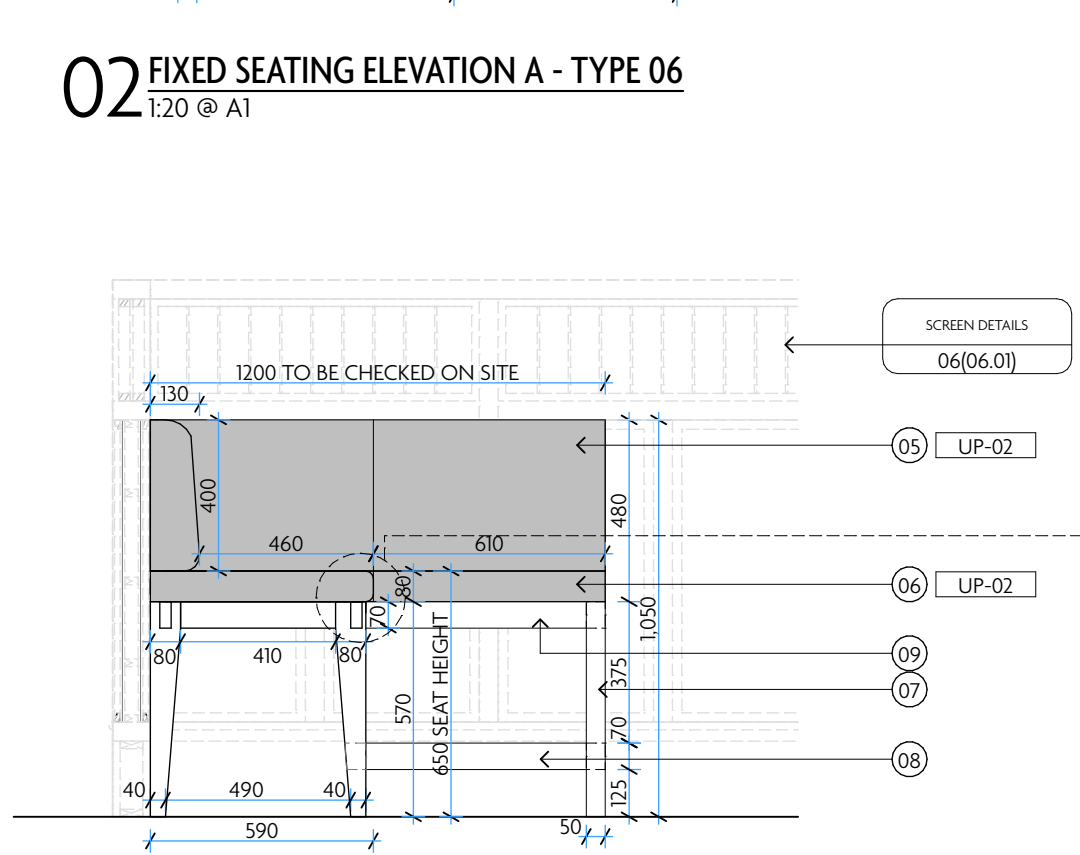
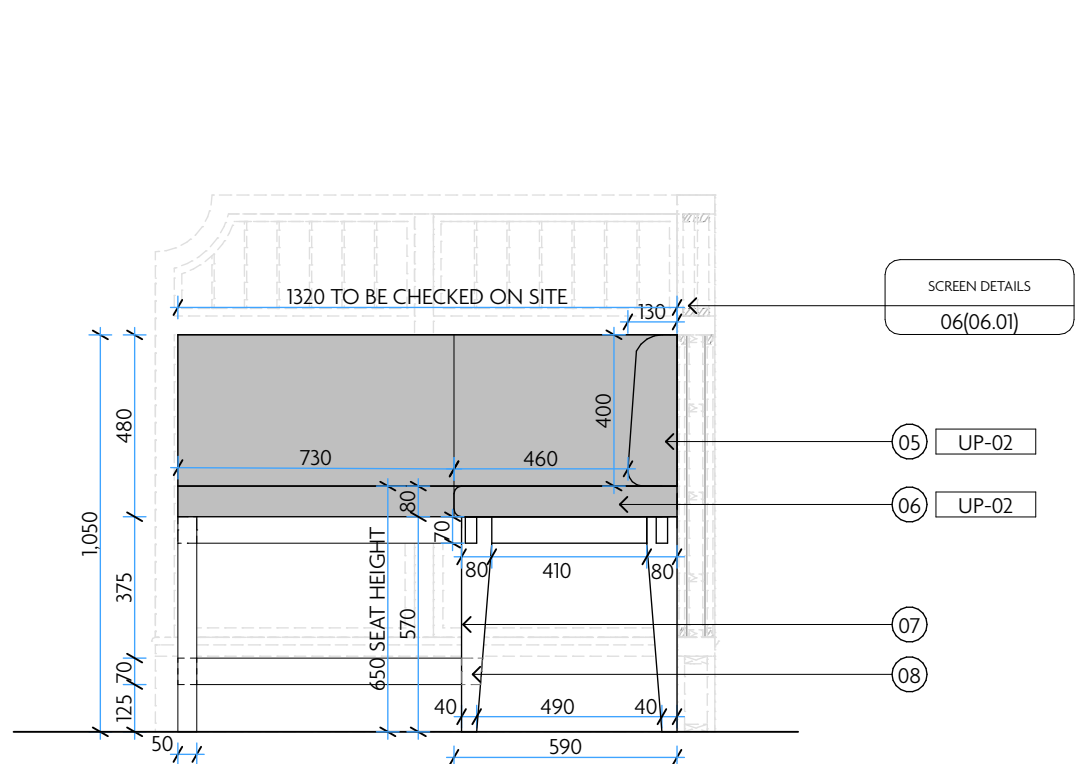


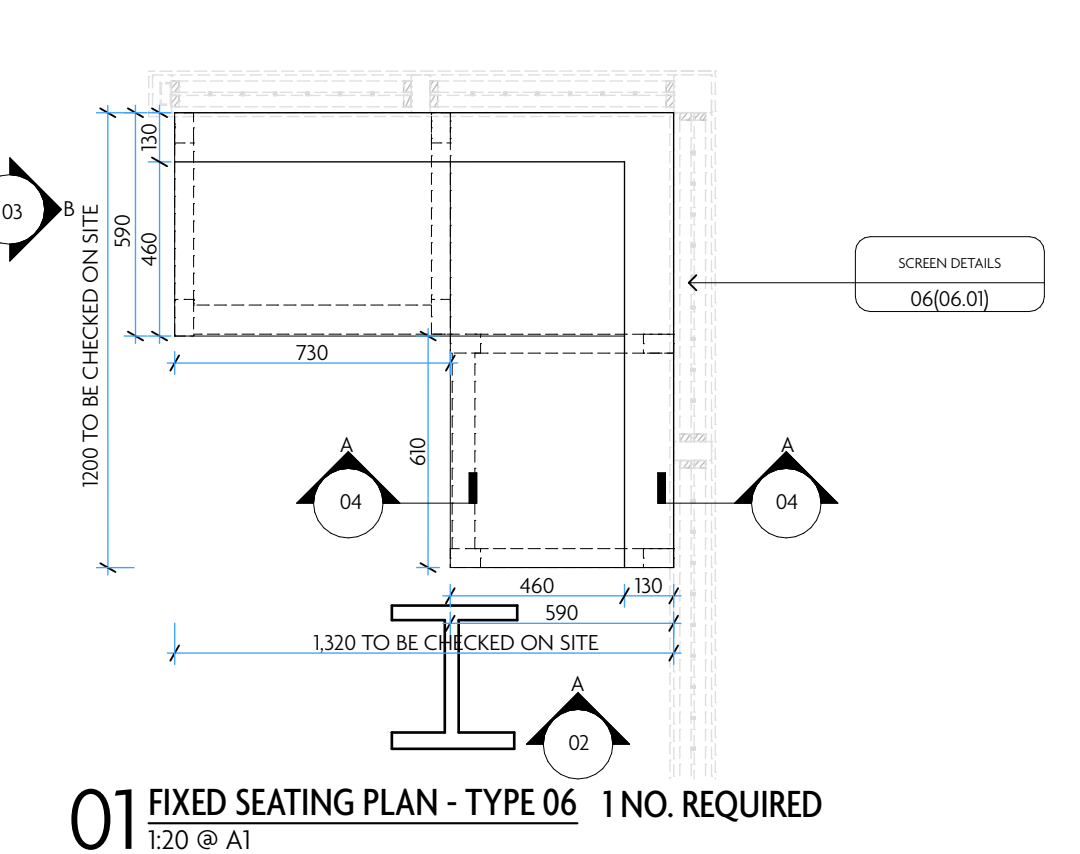

FIXED SEATING TO BE FREE-STANDING WITH NO FIXINGS TO BUILDING FABRIC

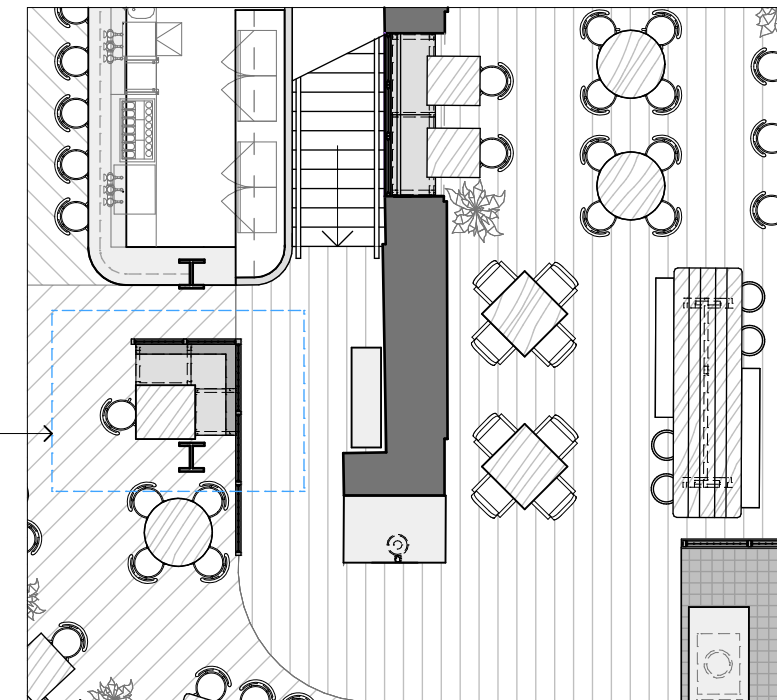

REFERENCE IMAGE FIXED SEATING TYPE 06

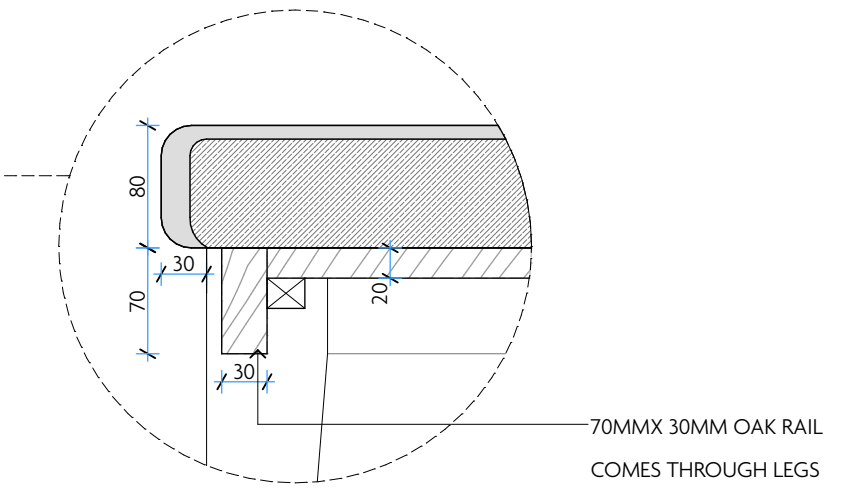

UPHOLSTERY KEY:





ALL FABRIC/LEATHER TO ACHIEVE CRIB 5 FIRE RATING

UP-02 UPHOLSTERED: SUPPLIER: FUTURA LEATHER RANGE: SELVAGGIO VERDE

UP-04 UPHOLSTERED: SUPPLIER: ILP LEATHER RANGE: LAGUNA TAN IN LAGUNA COLLECTION

UP-01 UPHOLSTERED: SUPPLIER: STUDIOTEX LTD RANGE: CROSSGRAIN IN COLOUR RED OAK REF: 4089-08

FIXED SEATING TO BE FREE-STANDING WITH NO FIXINGS TO BUILDING FABRIC

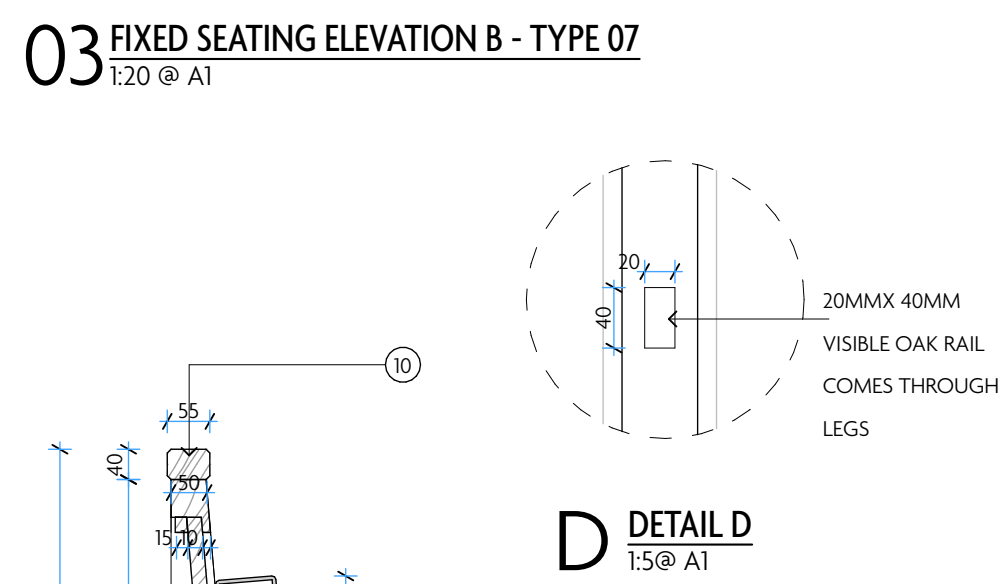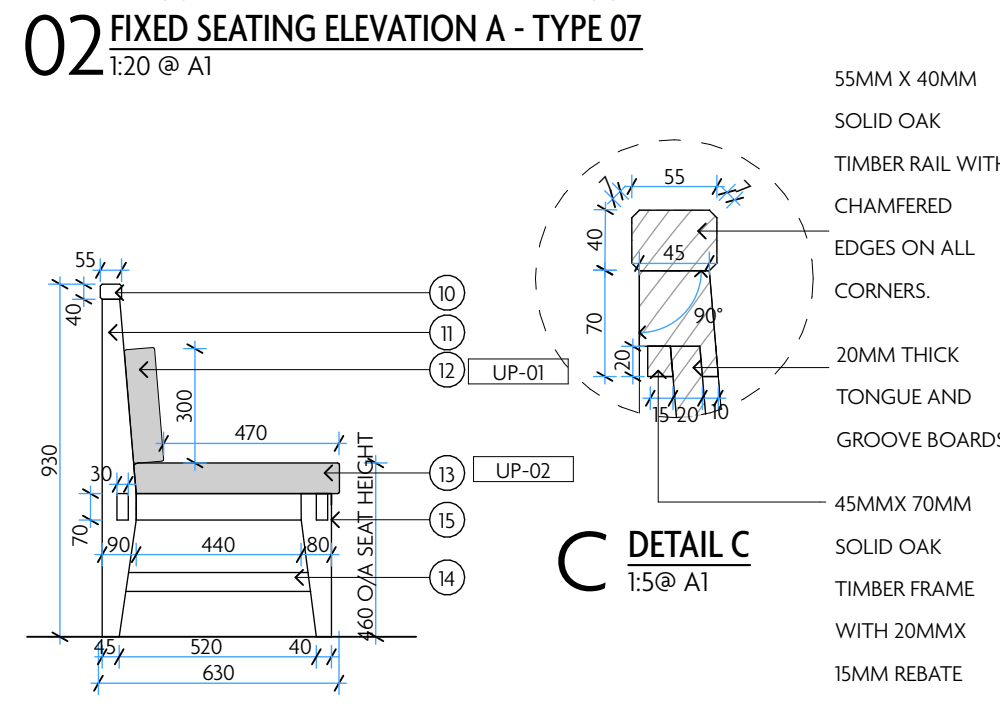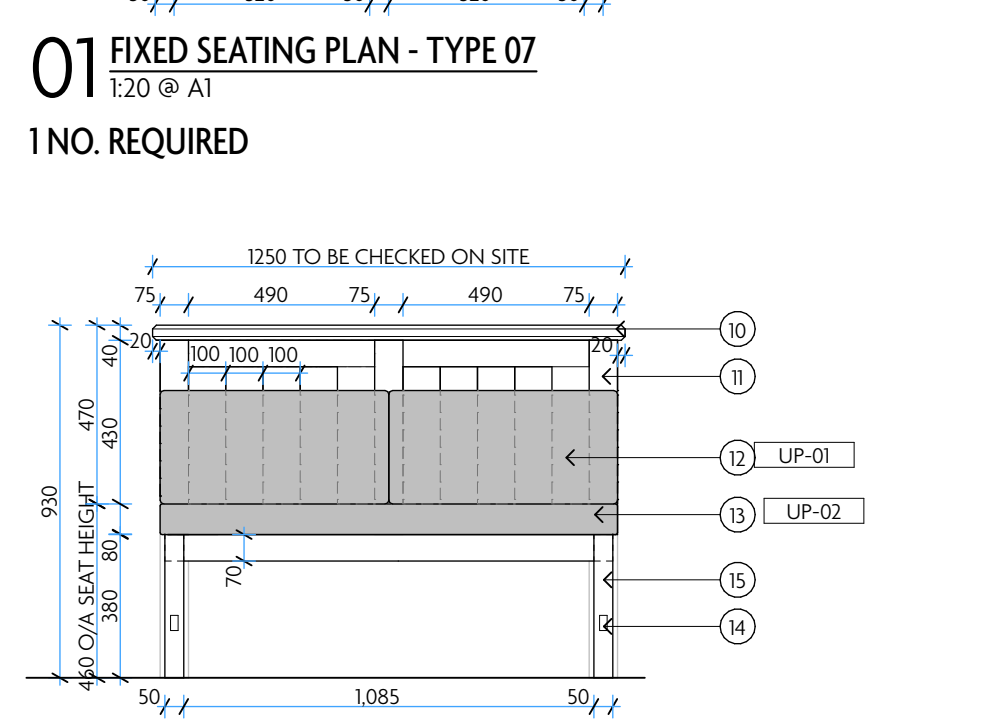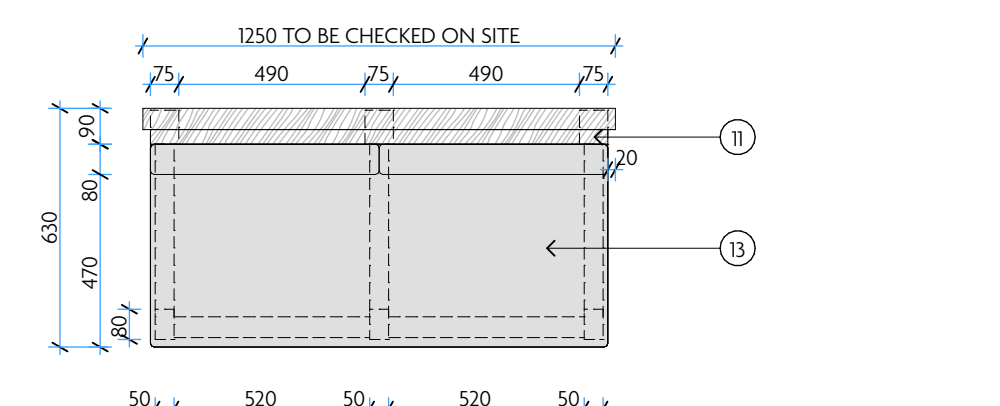

- GENERAL NOTES:
- DO NOT SCALE. ALL DIMENSIONS MUST BE CHECKED AND VERIFIED ON SITE.
- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
- THE CONTRACTOR SHALL TAKE THEIR OWN DIMENSIONS AND SHALL BE RESPONSIBLE FOR THE ACCURATE ADJUSTMENT OF ANY FITTING TOGETHER OF VARIOUS PARTS.
- ALL WORKS TO BE CARRIED OUT IN ACCORDANCE WITH THE CURRENT BRITISH STANDARDS, B.S. CODES OF PRACTICE AND BUILDING REGULATIONS.
- CONSTRUCTION DRAWINGS TO BE SUPPLIED WITH SAMPLES OF ALL FINISHES AND MATERIALS, TO BE APPROVED BY MACAULAY SINCLAIR PRIOR TO FABRICATION/PROCUREMENT.
- SITE SURVEY REQUIRED - ALL DIMENSIONS ARE INDICATIVE ONLY.
- 1 METER SAMPLE SECTION OF SEATING REQUIRED IN SIMILAR PROPOSED UPHOLSTERY FOR FINAL APPROVAL BY CLIENT AND MACAULAY SINCLAIR.
- ALL FIXED SEATING TO BE BY SPECIALIST.
- NOTES:
- TIMBER END GABLES WITH INSET PANEL TO HAVE FINGER PANELLING (APPLIED AS PER DETAIL A) TO BE PAINT FINISHED
 - FULLY UPHOLSTERED FLUTED BACK REST WITH EQUAL SPACING AND NO LARGER THAN 130MM. ALL SEAMS TO BE STITCHED IN MATCHING THREAD. SEAT PAD SPLITS TO LINE THROUGH WITH FLUTE
 - CMFR FOAM SEAT PAD TO BE FORMED IN EQUAL SECTIONS AS INDICATED. SEAT PAD TO BE WRAPPED IN LEATHER FRONT TO BACK TO AVOID SEAM ON FRONT EDGE. ENDS TO BE FINISHED WITH LEATHER CUT TO SUIT FOAM PROFILE AND SEAM FINISHED IN TOP-STITCHED.
 - 60MM SOLID OAK SQUARE LEGS TAPERING DOWN TO 40MM.
 - TAPERED CMFR FOAM LEATHER UPHOLSTERED BACK PADS FORMED IN SECTIONS. TO LINE THROUGH WITH SEAT PAD. ENDS TO BE FINISHED WITH LEATHER PANEL CUT TO SUIT FOAM PROFILE
 - SEAT PAD TO BE FORMED IN EQUAL SECTIONS AS INDICATED. LEATHER TO WRAP STITCHED END PANEL TO CUSHION. TO BE FINISHED WITH LEATHER CUT TO SUIT FOAM PROFILE AND SEAM FINISHED IN TOP-STITCHED.
 - TAPERED FRONT & BACK LEGS TAPERING DOWN FROM 80MMX 50MM TO 40MMX 50MM WIDTH.
 - 70MMX 40MM FOOT RAIL CONSTRUCTED IN SOLID OAK. RAIL TO BE FORMED 125MM FROM F.F.L. REFER TO DETAIL B
 - 30MMX 70MM OAK RAIL TO FRONT OF FIXED SEAT. JOINT TO COME THROUGH LEGS. REFER TO DETAIL C
 - 40MMX 55MM SOLID OAK TIMBER RAIL WITH CHAMFERED EDGES.
 - 90MM DEPTH SOLID OAK TAPERED LEGS TO BACK OF FIXED SEATING.
 - HEAVY FEATHER FILLED CUSHIONS TO BE UPHOLSTERED. ALL SEAMS TO BE TOP-STITCHED IN MATCHING THREAD. SEAT PAD STITCHING AS INDICATED
 - SEAT PAD TO BE WRAPPED IN LEATHER FRONT TO BACK TO AVOID SEAM ON FRONT EDGE. ENDS TO BE FINISHED WITH LEATHER CUT TO SUIT FOAM PROFILE AND SEAM FINISHED IN TOP-STITCHED.
 - 30MMX 70MM RAIL TO FRONT & BACK OF FIXED SEAT WITH VISIBLE MORTISE AND TENON JOINT
 - 80MM DEPTH SOLID OAK TAPERED LEGS TO FRONT OF FIXED SEATING.

