




FRONT ELEVATION

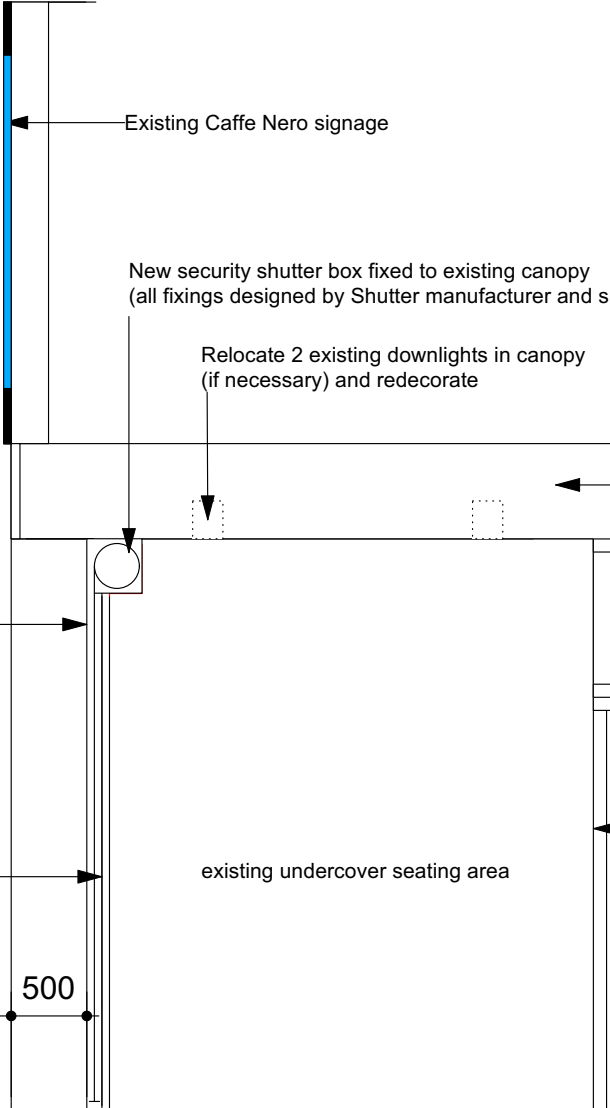

SECTION

Proposed new security roller shutter - supplier by P&K Shutters

Door spec - 5" 10 swg tube, with 80mm galv windlock guides
22swg galv perforated curtain with cast windlocks and steel enlocks.
Finish - Black satin
Electric TM with manual override crank handle, safety brake and rocker switch.
13 amp spur fitted to side wall (contractor to determine exact location)

For full specification refer to manufacturers drawings and specification



Example of similar perforated black shutter



Existing shopfront entrance
Red dash line showing approximate position of new shutter

NOTES
This drawing represents a performance guide upon which the contractor / sub-contractor must base their working drawings and details. Include all necessary tolerances prior to manufacture and installation.
Contractor must undertake a full survey of the area to establish all dimensions and ensure accurate setting out
Advise on suitability of all details shown to ensure structural stability ease and economy of construction

A	Additional support post added to RHS	JN	4.9.23
Rev	Description	Drawn by	Date
CAFFÈ NERO			
Project	MANCHESTER MARKET ST		
Description	Proposed New Shopfront Shutter		
Scale	Drawn by	Date	
1:50@A3	JN	01/07/23	
Drawing No.	Revision		
CN/MMS/001	A		