



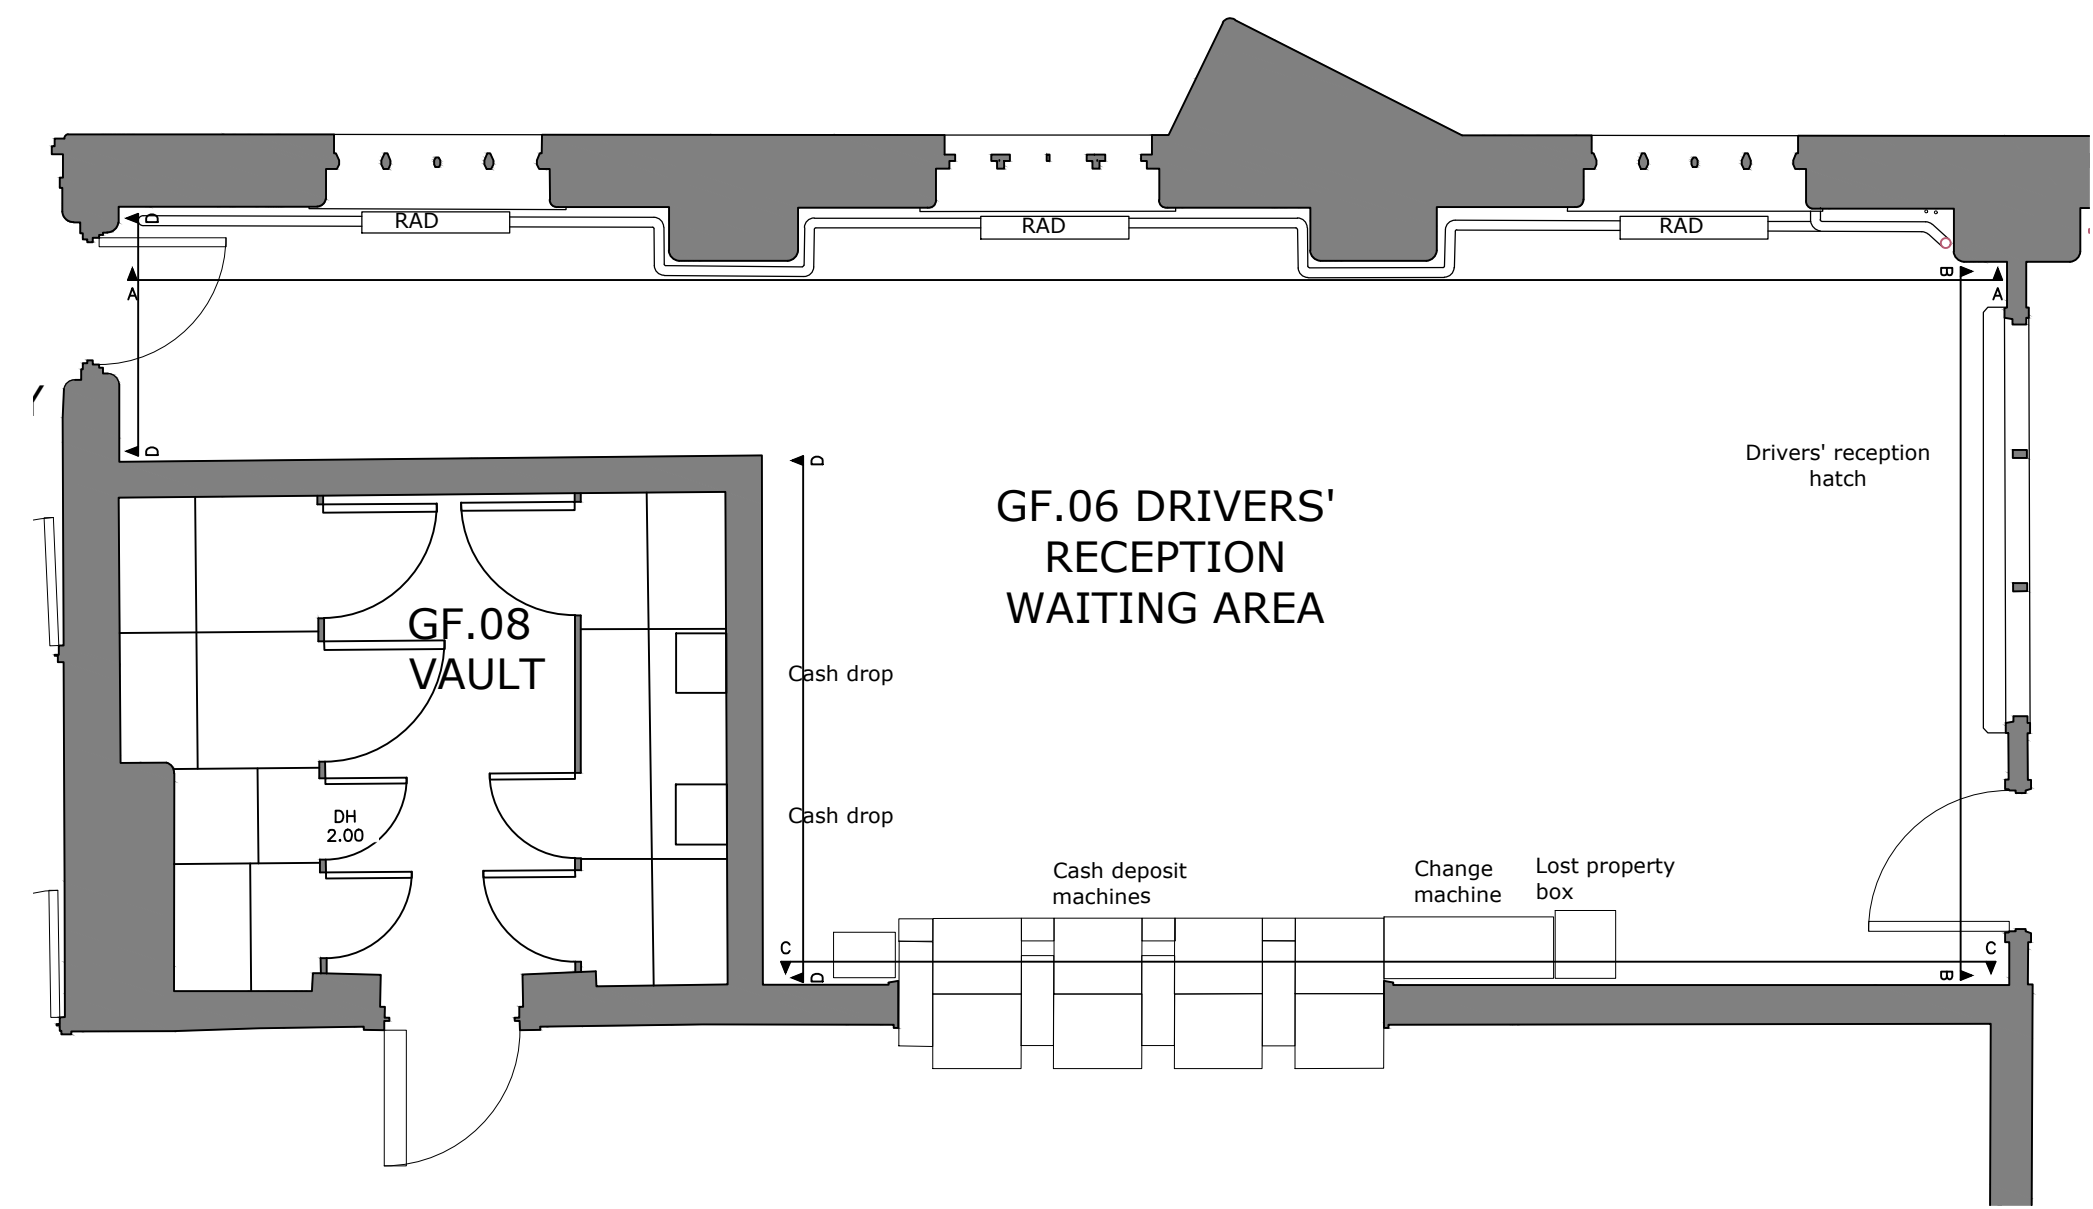


01 Existing Floor Plan

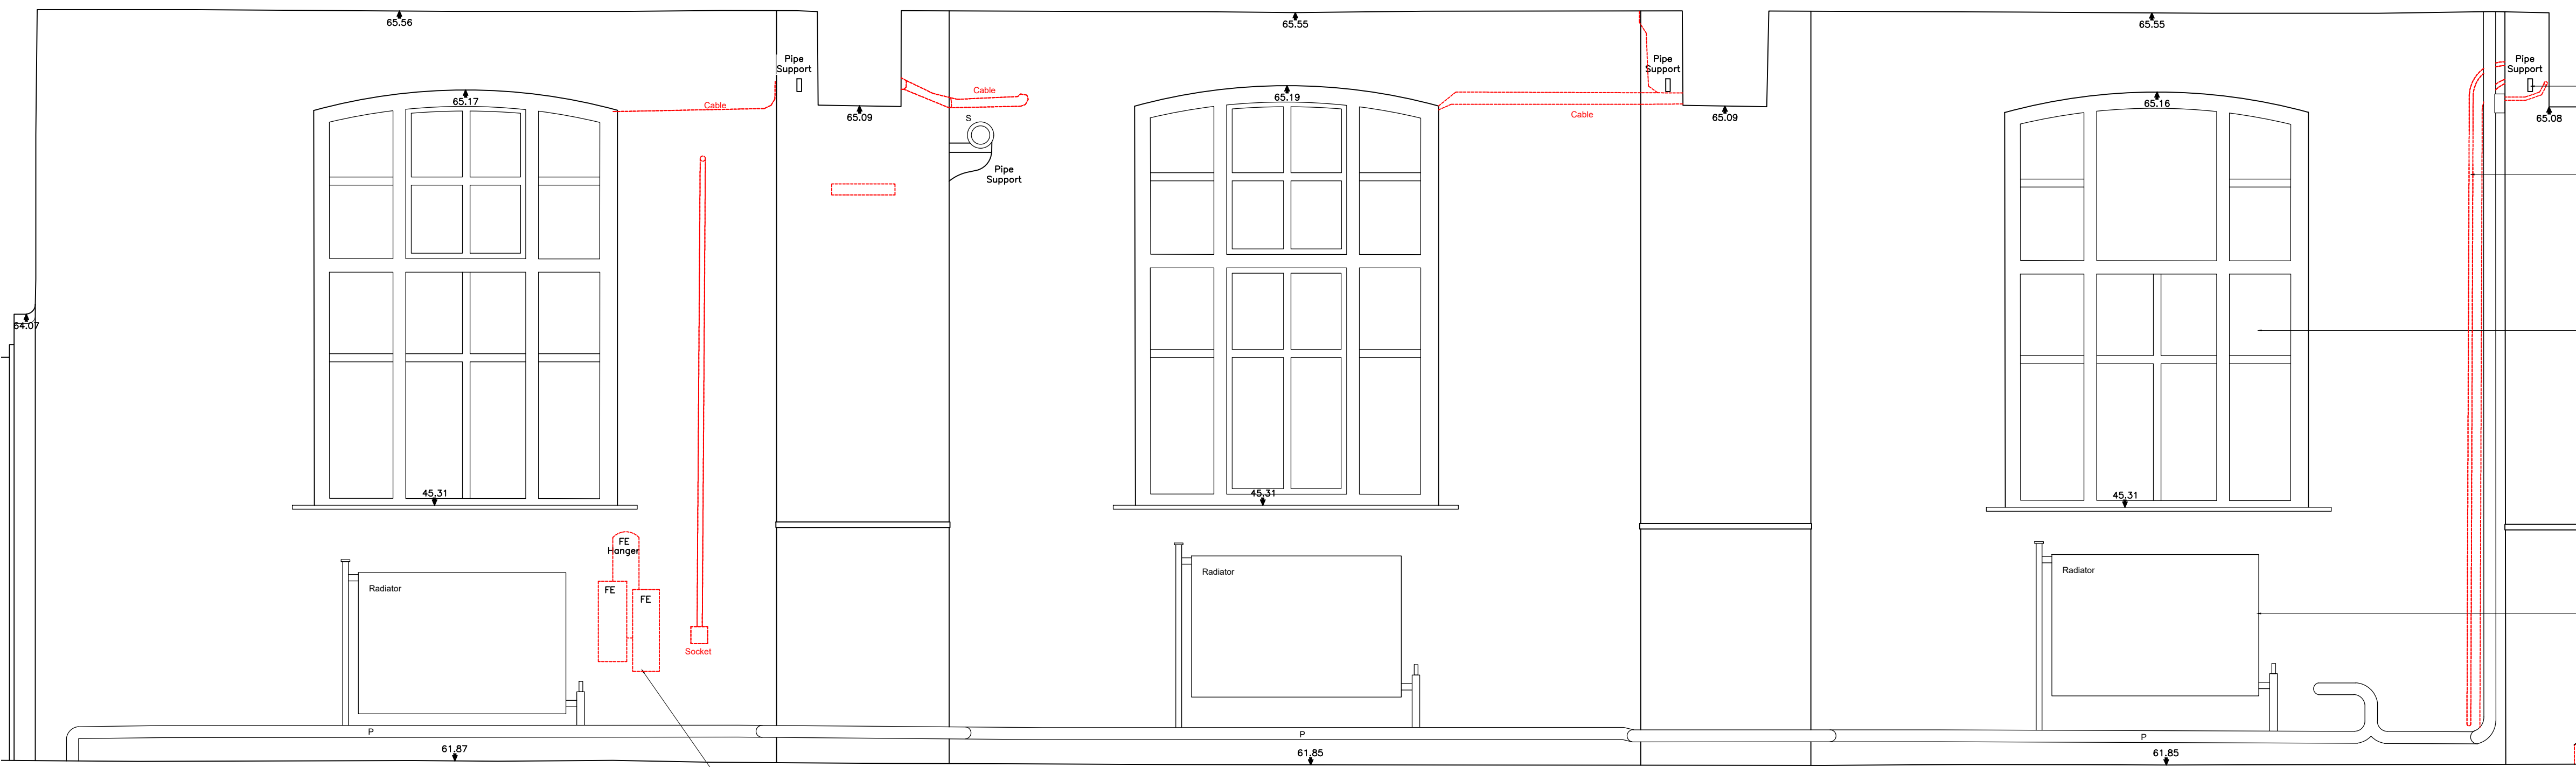


02 Existing Elevation A-A

- Dashed red indicates existing services, fittings etc to be carefully removed. Refer to NBS:
- Sprinkler pipe work to be retained throughout. Prepare surface for re-painting
- Existing services to be carefully removed as indicated on MEP drawings including any associated brackets, clips etc. Remaining holes to be treated as noted below.
- Existing windows to be retained and overhauled.
- Existing fittings to be carefully removed such as notice boards, shelves, conduit, brackets etc. Holes to be infilled with... Plaster to be re-patched with... Walls to be prepared for re-painting as NBS:
- All radiators and radiator pipe work to be retained. Existing paint to be removed using ... Radiators and pipe work to be prepared for re-painting
- Skirtings to be carefully removed throughout. Floor to be prepared for levelling screed.

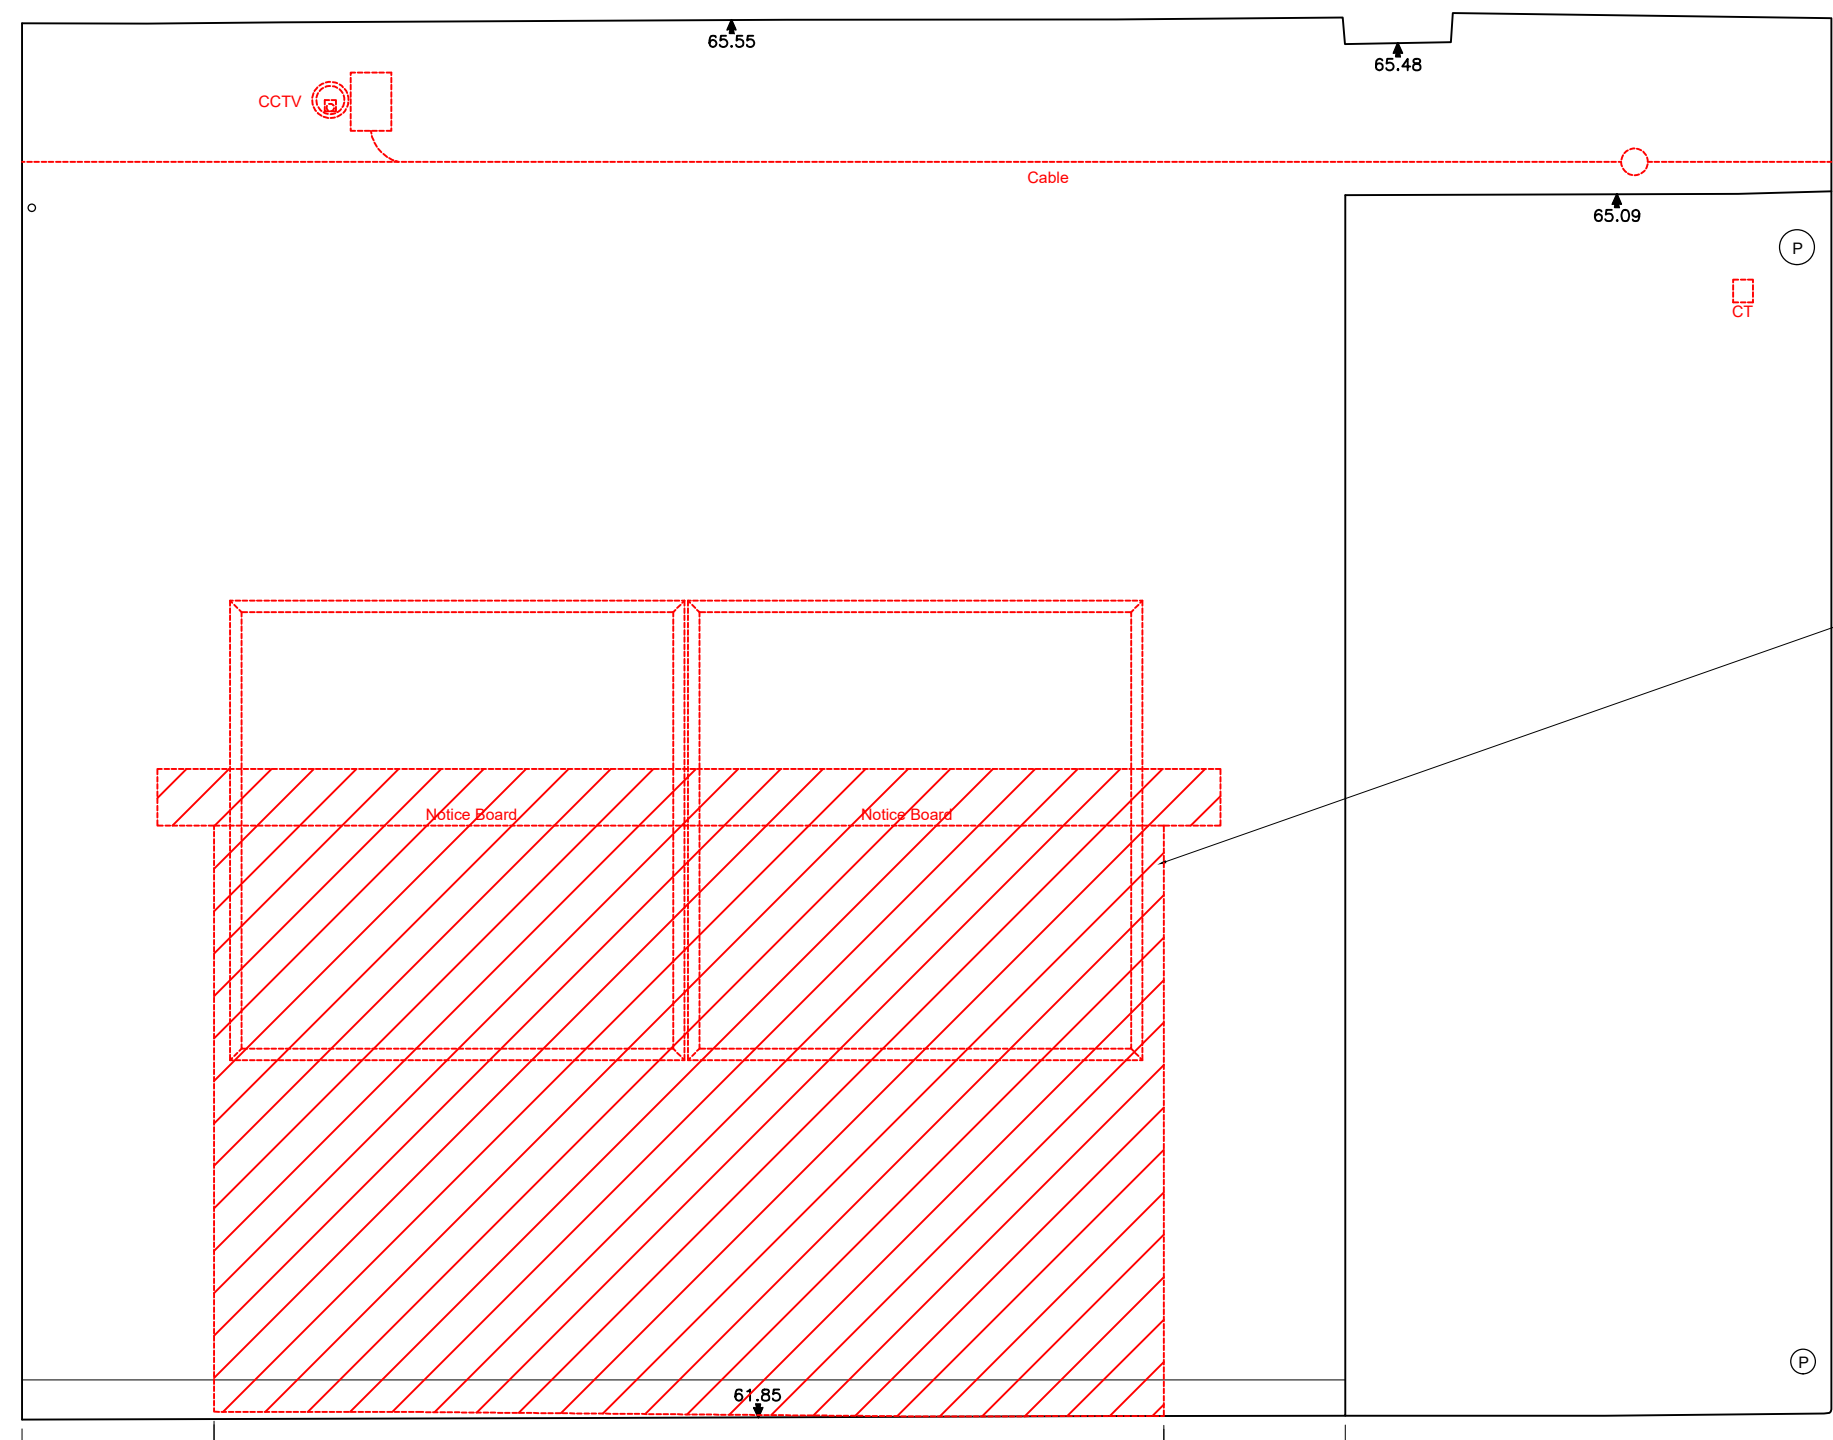


- Dashed red indicates existing services, fittings etc to be carefully removed. Refer to NBS:
- Ensure adequate temporary propping is in place when forming structural openings. Finished structural opening size 2512w x 1550h. To be confirmed with TFGM - opening to be relative to the cash machines being used. Lintels may be set higher if necessary relative to required existing masonry coursing.
- New structural opening and lintel pockets to be formed through existing masonry wall. Existing wall thickness is approximately 230mm and assumed to be 2 No. skins of imperial brickwork. Provide 2 No. prestressed concrete / steel lintels with padstones a minimum 150mm bearing per opening. Lintels are to be designed by the Structural Engineer.
- 3 No. Cash deposit machines to be installed within new structural opening.
- Practical installation method of the cash machines may require 60 x 60 SHS posts to be used as spacers between machines fitted vertically between floor and steel / lintel soffit.
- Skirtings to be carefully removed throughout. Floor to be prepared for levelling screed.

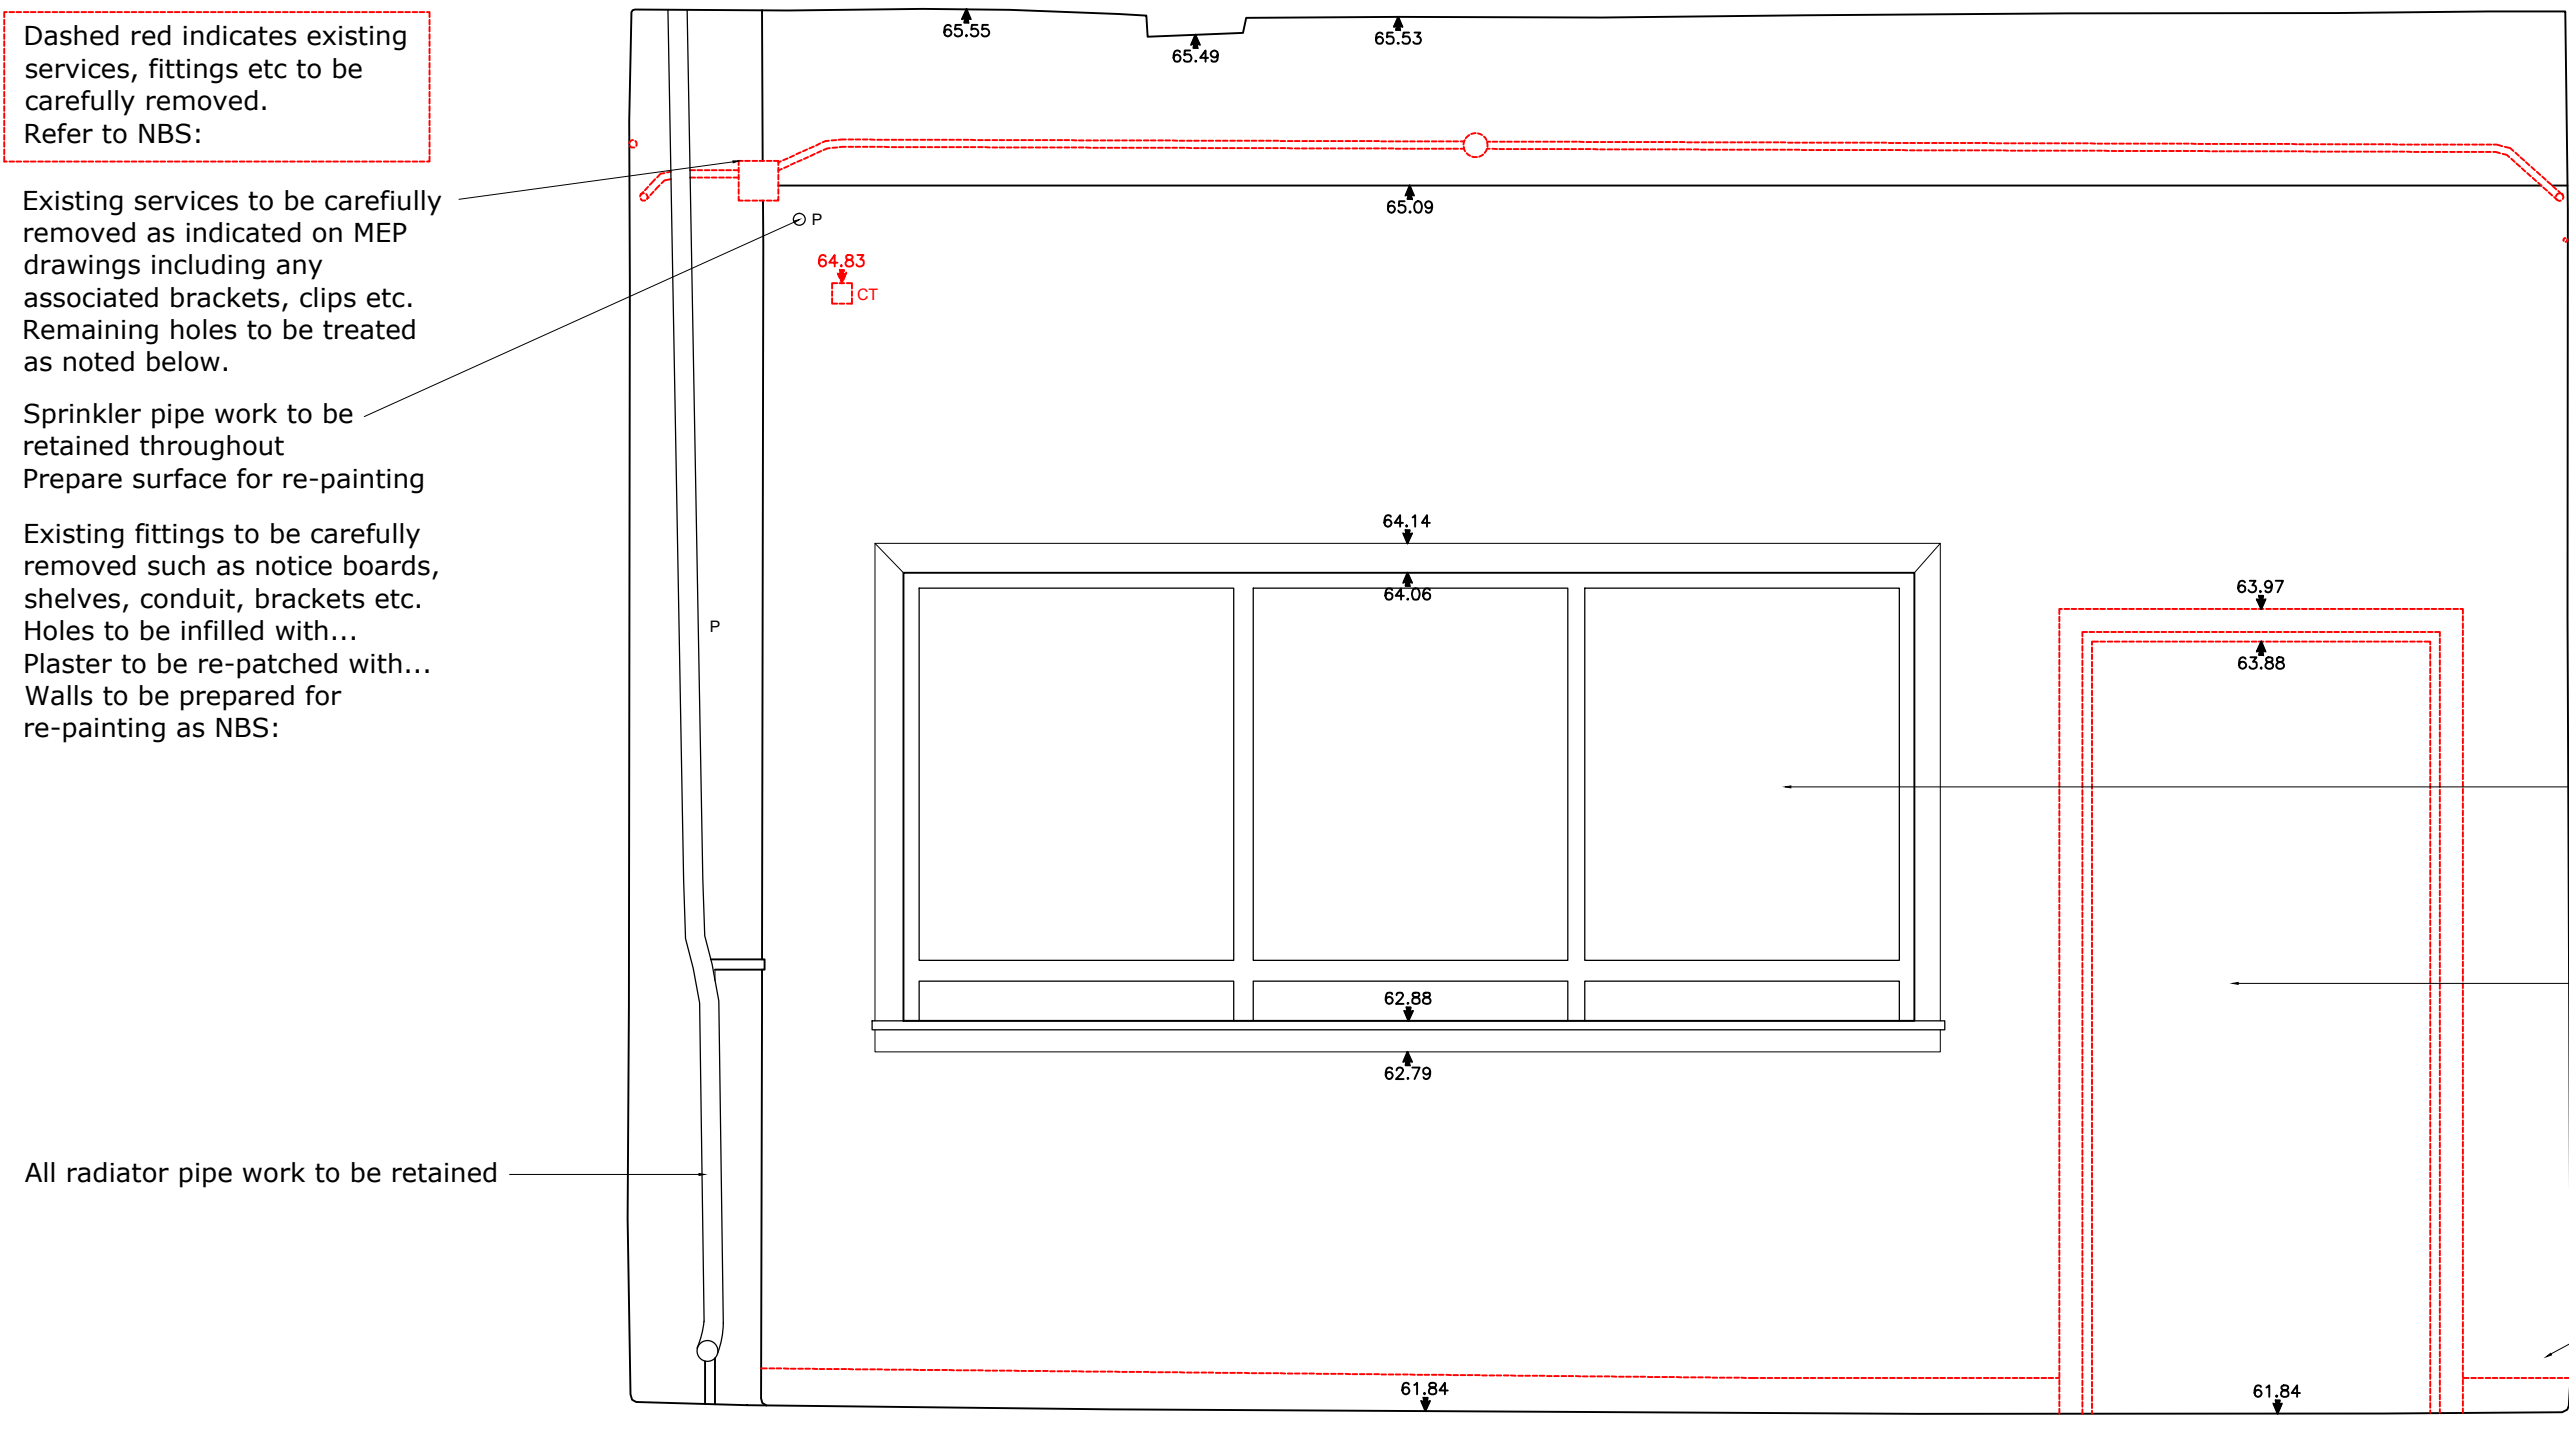


04 Existing Elevation B-B

- Dashed red indicates existing services, fittings etc to be carefully removed. Refer to NBS:
- Existing services to be carefully removed as indicated on MEP drawings including any associated brackets, clips etc. Remaining holes to be treated as noted below.
- Sprinkler pipe work to be retained throughout. Prepare surface for re-painting
- Existing fittings to be carefully removed such as notice boards, shelves, conduit, brackets etc. Holes to be infilled with... Plaster to be re-patched with... Walls to be prepared for re-painting as NBS:
- All radiator pipe work to be retained
- Drivers reception hatch to be retained.
- Existing door and frame to be removed and replaced with new doorset - refer to door schedule Door reference DG11
- Skirtings to be carefully removed throughout. Floor to be prepared for levelling screed.

03 Existing Elevation D-D

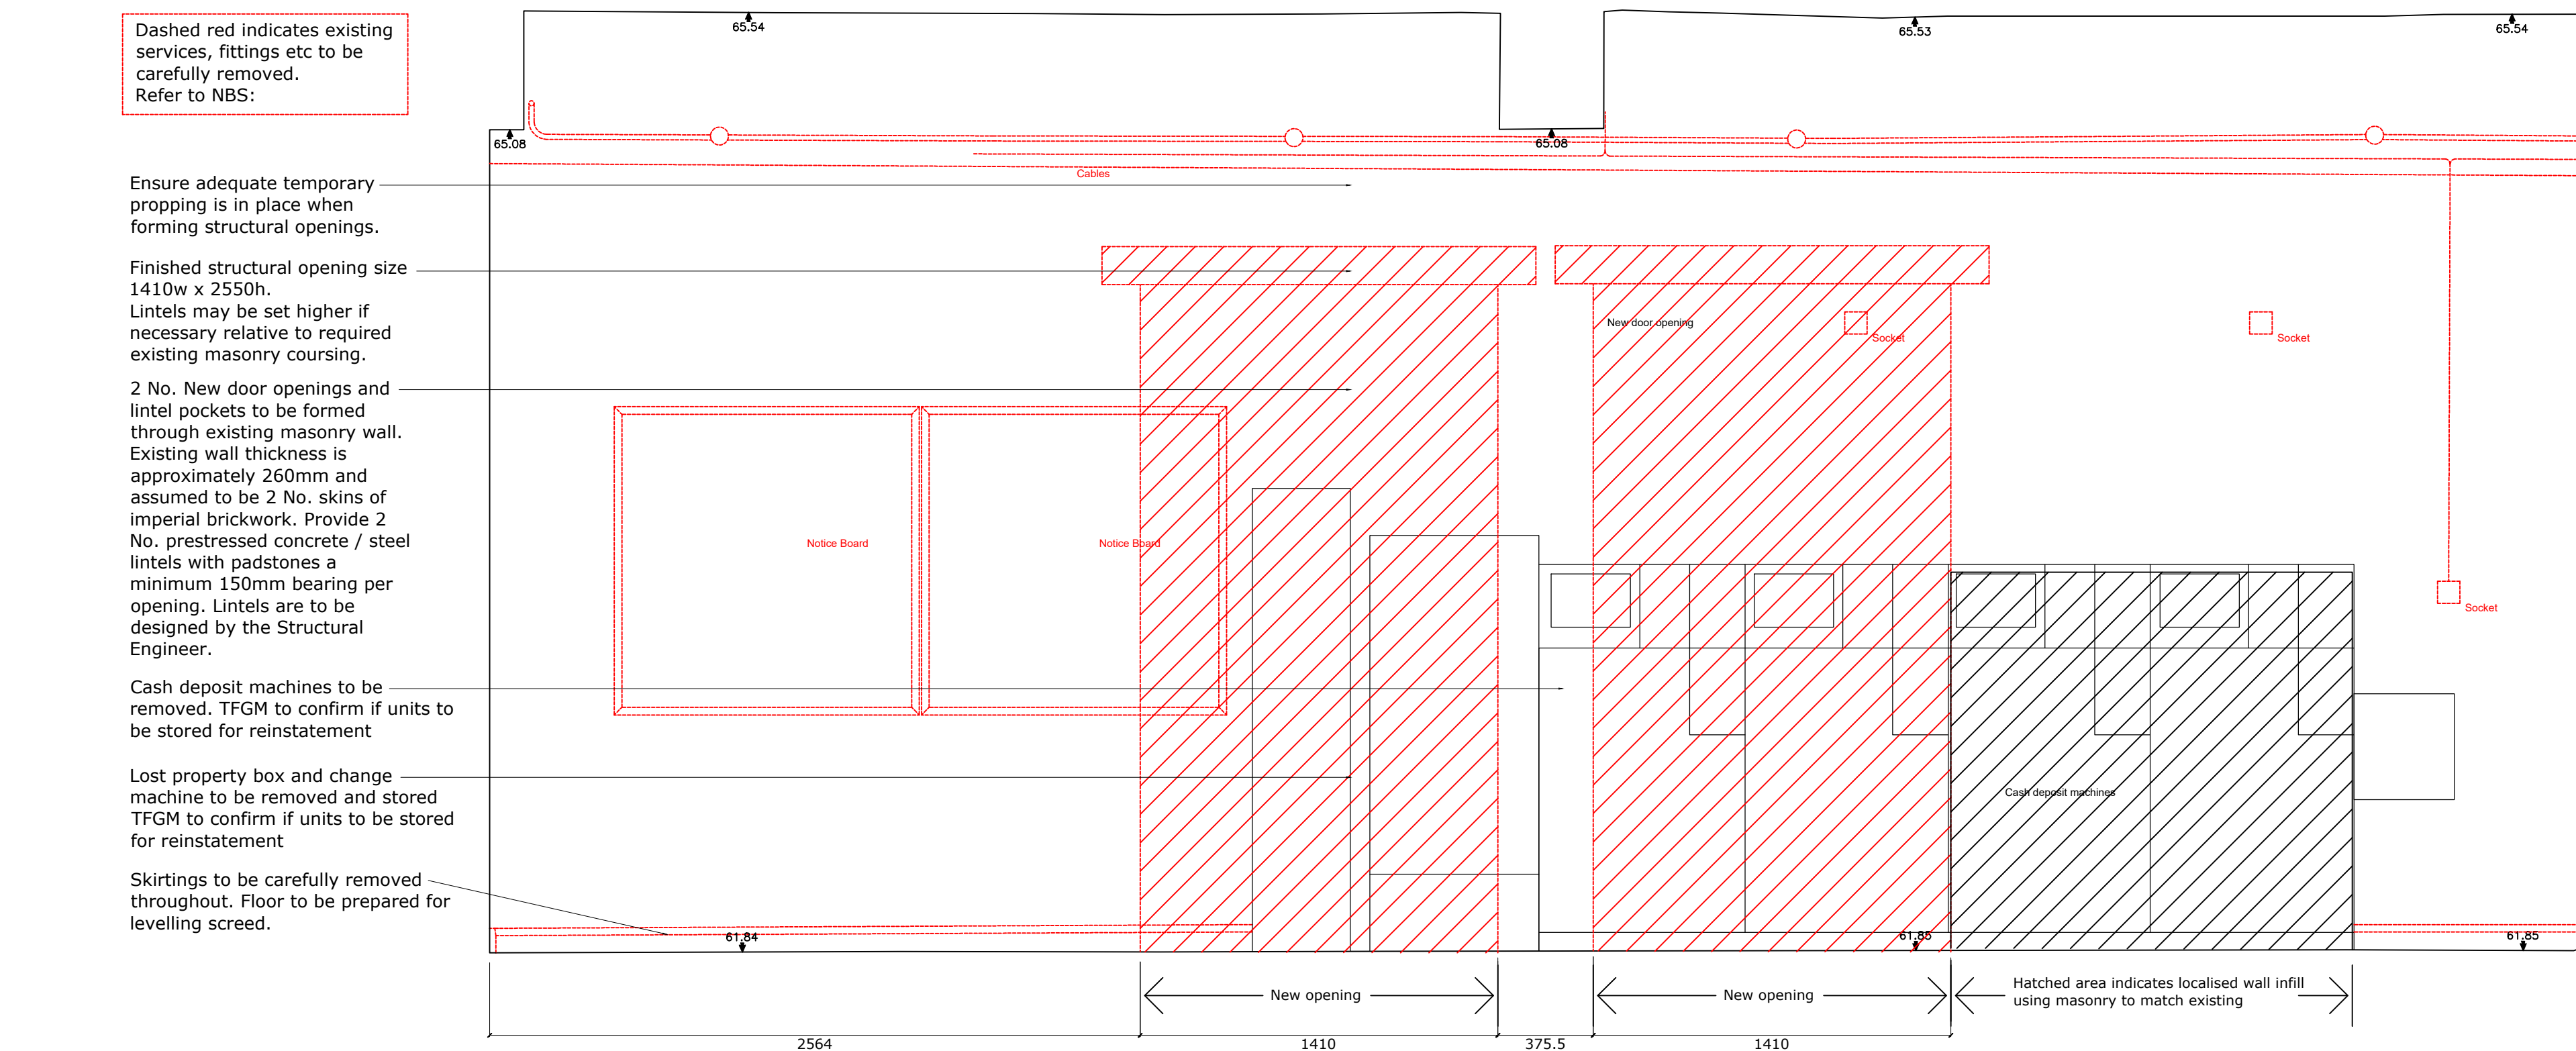

02 Existing Elevation C-C

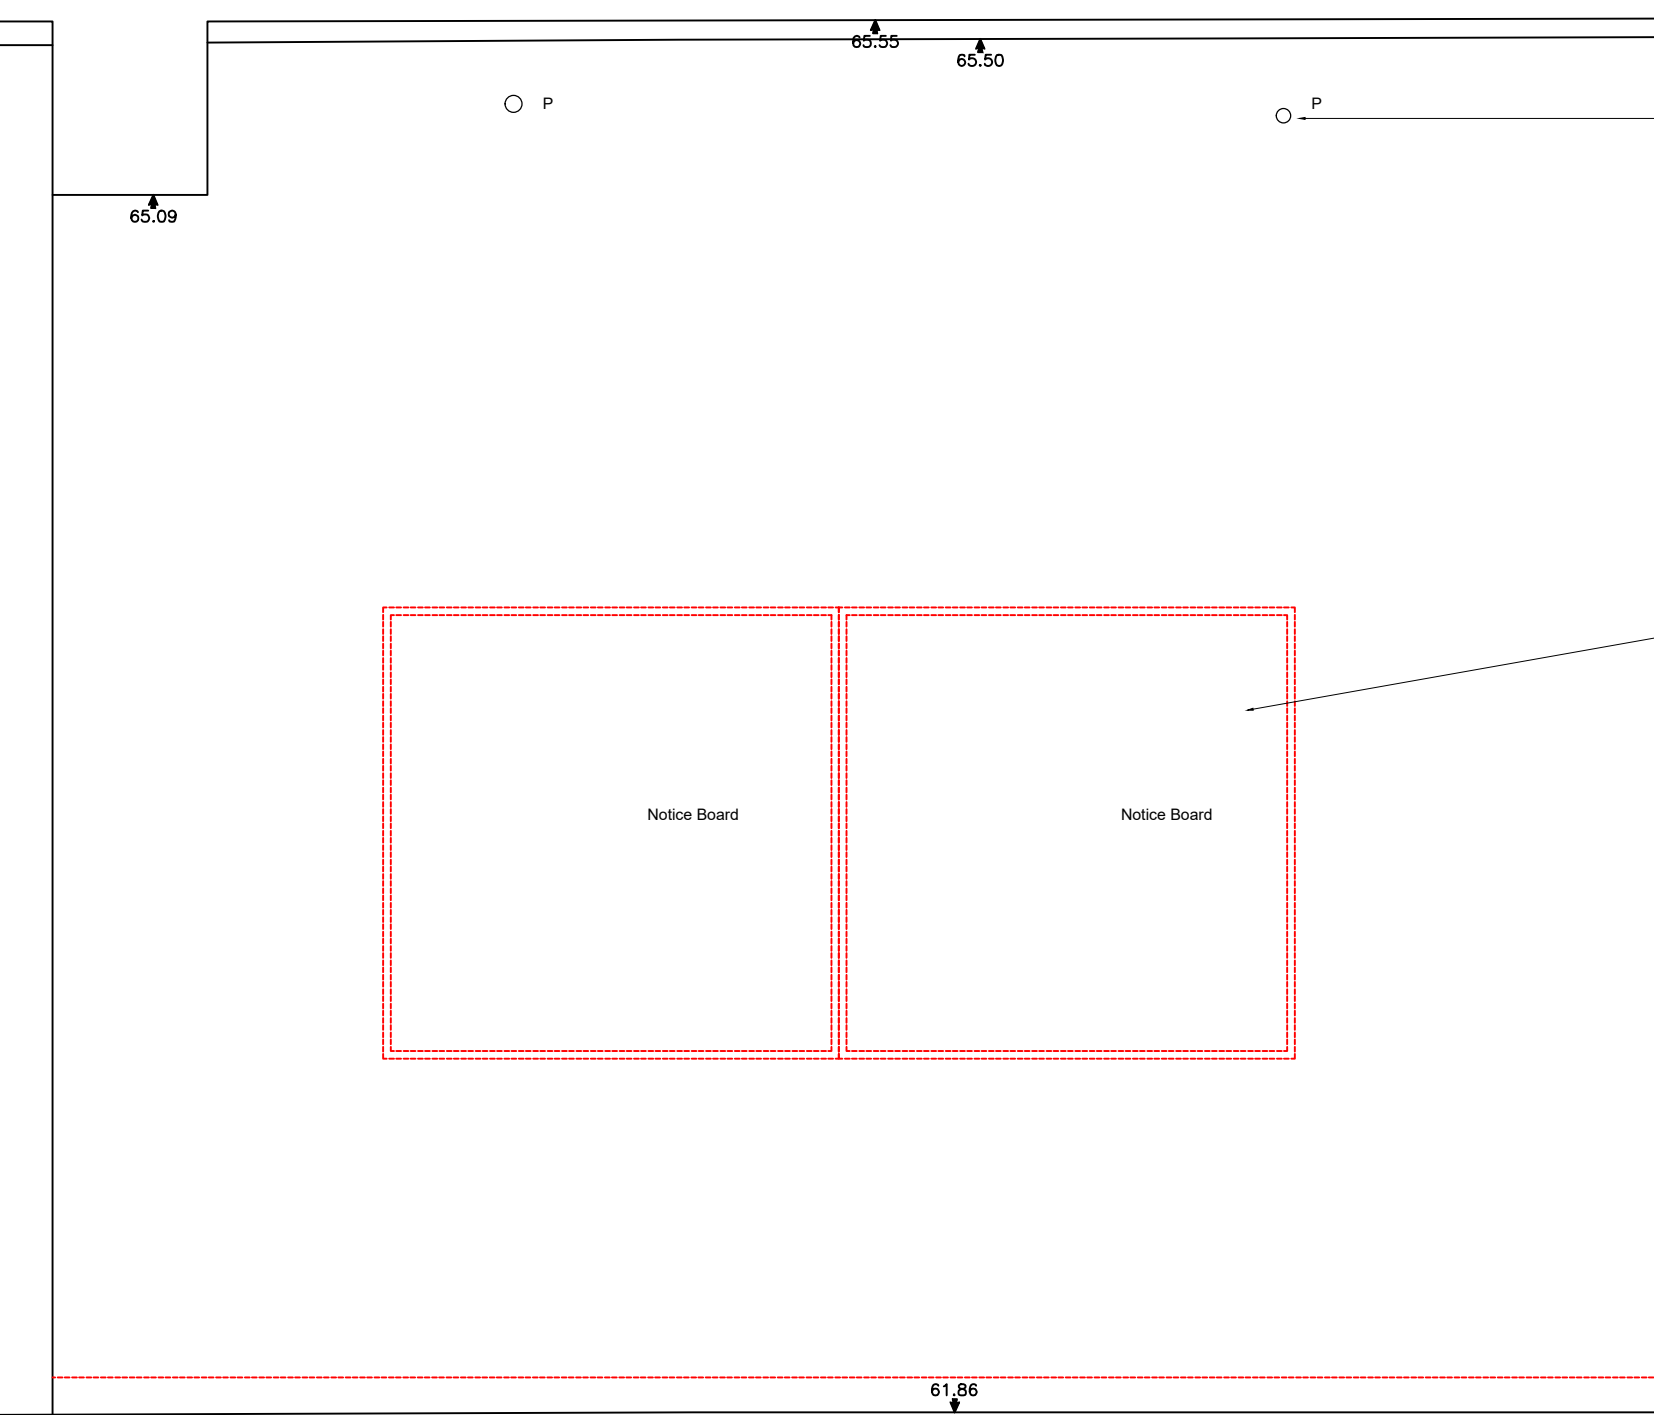

- Sprinkler pipe work to be retained throughout. Prepare surface for re-painting
- Existing fittings to be carefully removed such as notice boards, shelves, conduit, brackets etc. Holes to be infilled with... Plaster to be re-patched with... Walls to be prepared for re-painting as NBS: