


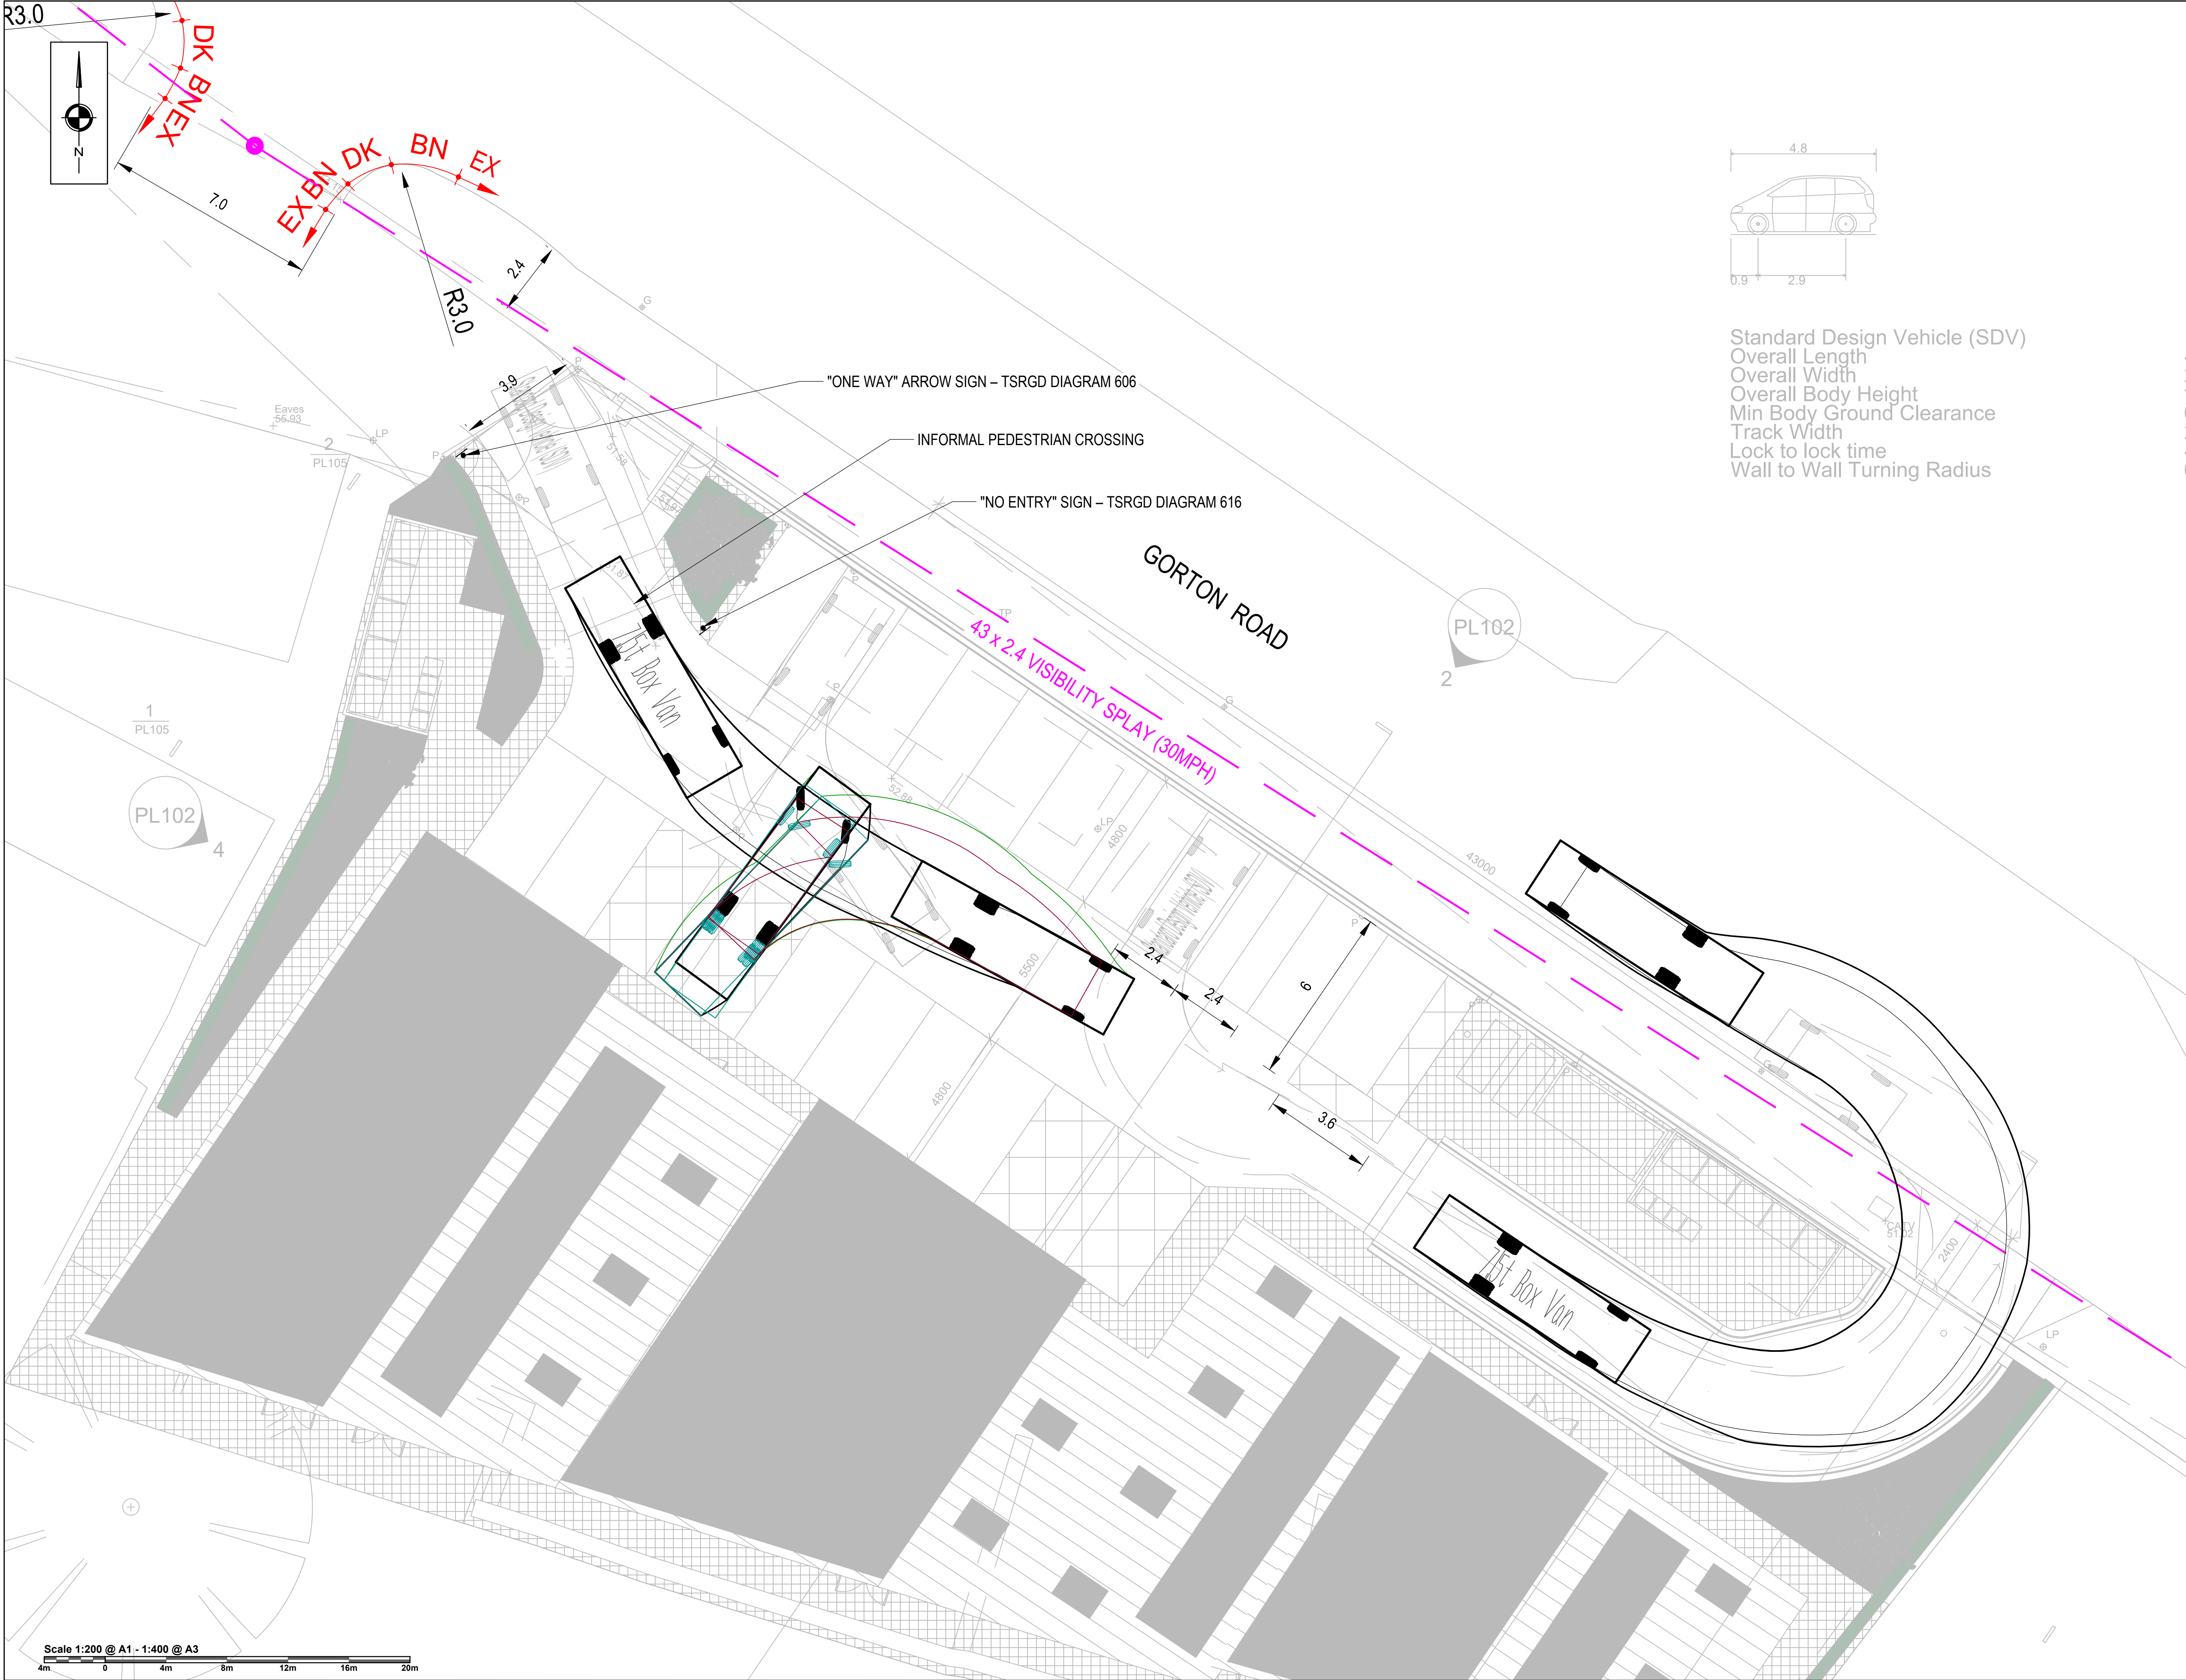

NOTES

- 1) ALL DIMENSIONS ARE IN METERS UNLESS STATED OTHERWISE
- 2) ALL WORK IS TO BE CARRIED OUT IN ACCORDANCE WITH THE SPECIFICATION FOR HIGHWAY WORKS AND LOCAL AUTHORITY GUIDANCE
- 3) UNDERGROUND SERVICES ARE PRESENT IN THE AREA. CONTRACTOR IS TO CONFIRM THE PRECISE LINE AND DEPTH OF ANY SERVICES PRIOR TO THE COMMENCEMENT OF ANY EXCAVATION WORKS
- 4) IT IS THE CONTRACTORS RESPONSIBILITY TO CONTACT AND MAKE ALL THE NECESSARY ARRANGEMENTS WITH THE STATUTORY UNDERTAKERS FOR THE IDENTIFICATION OF EXISTING SERVICES AND AREAS OF DANGER WHEN EXCAVATING
- 5) THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT SPECIALIST DETAILS AND SPECIFICATIONS. CONSTRUCTION DETAILS FOR THE USED MATERIALS CAN BE FOUND ON THE RELEVANT DRAWINGS.

KEY

- SITE BOUNDARY
- PROPOSED KERB LINE
- TACTILE PAVING
- BULLNOSED KERB TYPE BN WITH 0 - 6mm UPSTAND
- DROPPED CROSSING CONSISTING OF BULLNOSED KERB TYPE BN WITH 0 - 6mm UPSTAND AND TRANSITION KERBS EITHER SIDE
- FLAT TOP EDGING TYPE EF LAID FLUSH
- EXISTING KERB TO REMAIN

Standard Design Vehicle (SDV)

Overall Length
Overall Width
Overall Body Height
Min Body Ground Clearance
Track Width
Lock to lock time
Wall to Wall Turning Radius

7.5t Box Van

Overall Length: 8.00m
Overall Width: 2.50m
Overall Body Height: 3.50m
Min Body Ground Clearance: 0.35m
Track Width: 2.00m
Lock to lock time: 7.50s
Kerb to Kerb Turning Radius: 7.50m

REVISIONS

REV	DESCRIPTION	DATE	BY
-	FIRST ISSUE	25/03/25	WR
A	SECOND ISSUE	23/04/25	WR
B	THIRD ISSUE	19/09/25	WR

AVAL CONSULTING GROUP
CIVIL, ENVIRONMENT & STRUCTURAL ENGINEERS

Transportation Planning : Environmental Consultants

www.aval-group.co.uk, Email: contact@aval-group.co.uk
Company Number: 11622039

Client Name:

WORLD METAL RECYCLING LTD

Project Title:

GORTON RD
MANCHESTER, M11 2DZ

Drawing Title:

SWEPT PATH BOX VAN

Date:	19.09.2025	Drawn By:	LS
Scale:	1:100 @ A1 1:200 @ A3	Checked:	WR
Status:	PLANNING	Approved:	WR

Drawing No:	AVAL/93252/0000/001	Rev:	B
-------------	---------------------	------	---