
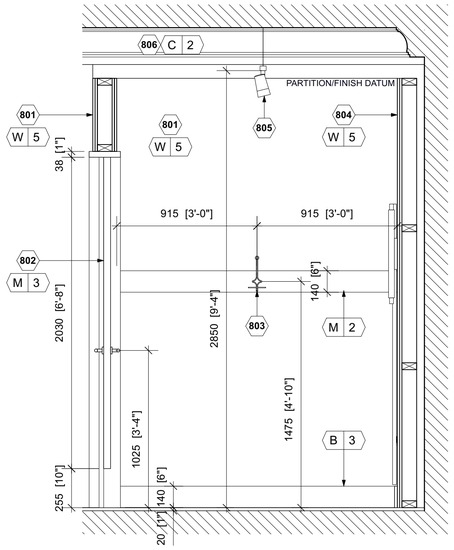



1 FITTING ROOM ELEVATION

LB802 SCALE 1:20 @ A1

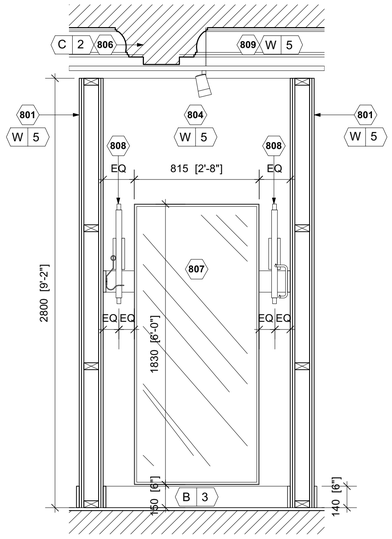


2 FITTING ROOM ELEVATION

LB802 SCALE 1:20 @ A1

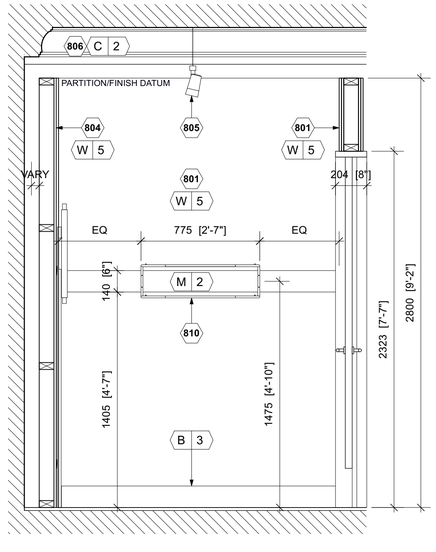


3 FITTING ROOM ELEVATION

LB802 SCALE 1:20 @ A1

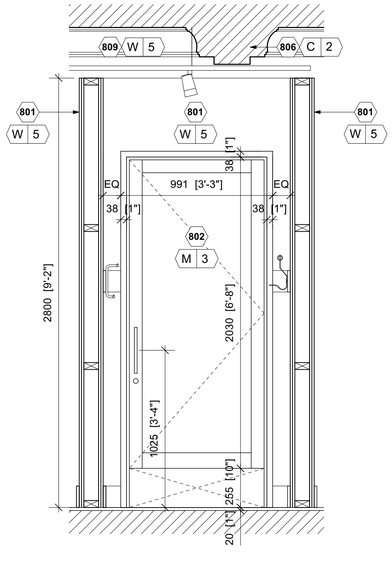


4 FITTING ROOM ELEVATION

LB802 SCALE 1:20 @ A1

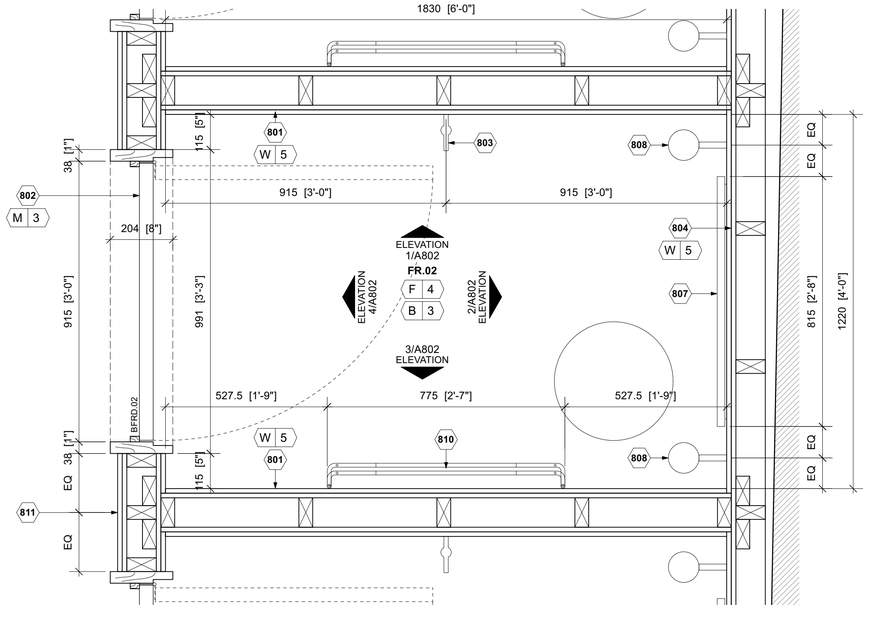

5 ENLARGED FITTING ROOM PLAN

LB802 SCALE 1:10 @ A1



KEY NOTES

801 CONSTRUCT 2800MM HIGH PARTITION WALL COMPRISING 100X50MM (96X45MM) C24 TIMBER STUDS AT 450MM CENTRES LINED BOTH SIDES WITH 15MM PLYWOOD SHEATHING AND 15MM GYPROC WALL BOARD, COMPLETE WITH 140X18MM PAINTED TULIPWOOD BASE. ALL BOARD JOINTS AND FIXING HOLES TO BE SEAMLESS FINISHED AND PREPARED FOR DECORATION.

802 914X2030MM SINGLE LEAF PAINTED SOLID CORE TIMBER DOOR WITHIN 38MM PAINTED TULIPWOOD FRAME. ALL FITTING ROOM DOORS TO HAVE WELDED PIPS TO HINGES TO PREVENT OPENING MORE THAN 90 DEG. PULL HANDLE TO BE INSTALLED AT 1025MM ABOVE FFL AND LOCK TO BE INSTALLED AT 825MM ABOVE FFL.

803 1No. FITTING ROOM HOOK SECURED TO CENTRE OF 140X18MM PAINTED TULIPWOOD BATTEN. BATTEN SECURED TO SUBSTRATE AT 1475MM ABOVE FFL WITH STAINLESS STEEL WOOD SCREWS. SCREW FIXINGS TO BE COUNTERSUNK AND FINISHED WITH MATCHING TIMBER PELLET.

804 CONSTRUCT 2800MM HIGH LINING WALL COMPRISING 100X50MM (96X45MM) C24 TIMBER STUDS AT 450MM CENTRES LINED INTERNALLY WITH 15MM PLYWOOD SHEATHING AND 15MM GYPROC WALL BOARD, COMPLETE WITH 140X18MM PAINTED TULIPWOOD BASE. ALL BOARD JOINTS AND FIXING HOLES TO BE SEAMLESS FINISHED AND PREPARED FOR DECORATION.

805 NEW SUSPENDED LIGHTING TRACK (H1) AT 2850MM AFFL.

806 EXISTING PLASTERBOARD CLAD BEAM TO BE PREPARED FOR DECORATION.

807 815X1830MM FITTING ROOM MIRROR SECURED TO WALL 150MM ABOVE FFL. REFER TO DRAWING A850 FOR DETAILS.

808 WALL MOUNTED SCONCE LIGHT FIXTURE (2No. PER ROOM). TOP OF SCONCE TO BE ALIGNED WITH TOP OF MIRROR.

809 EXISTING DEMISE WALL TO BE PREPARED FOR DECORATION.

810 775MM LONG FITTING ROOM OUTFITTER SECURED TO 140X18MM POPLAR BATTEN. BATTEN SECURED TO SUBSTRATE AT 1475MM ABOVE FFL WITH STAINLESS STEEL WOOD SCREWS. SCREW FIXINGS TO BE COUNTERSUNK AND FINISHED WITH MATCHING TIMBER PELLET.

811 FITTING ROOM NAME FRAME, 3MM MIRROR GLAZING ADHERED DIRECTLY ONTO A 12MM PLYWOOD BACKING INSERTED INTO A 20X20X2MM BLACKENED STEEL ANGLE FRAMING. NAME FRAME SECURED TO PARTITION WALL AT 1370MM AFFL.

apt.design
Studio 1
31 Main Street, Kilby
Leicestershire, UK, LE18 3TD
Studio 2
2nd Floor, 22 Conduit Street
London, UK, W1S 2XR
W www.apt-design.co.uk T +44 (0)1858 469420

For Office Use: A_12746

ANTHROPOLOGIE

1-5 ST. ANNS SQUARE
MANCHESTER
M2 7EF

CONSULTANT :

DRAWN BY:
ZR

ISSUE / DATE:
LISTED BUILDING CONSENT 18.08.2025

REVISION :

SHEET TITLE :
TYPICAL FITTING ROOM SETTING OUT

SHEET NO. :
LB802

Figured dimensions shall be taken in preference to scaled dimensions and any discrepancies or errors are to be referred to the Designer. Contractors, sub-contractors and suppliers must verify all dimensions on site before commencing work or making any fabrication drawings. @ Copyright Reserved