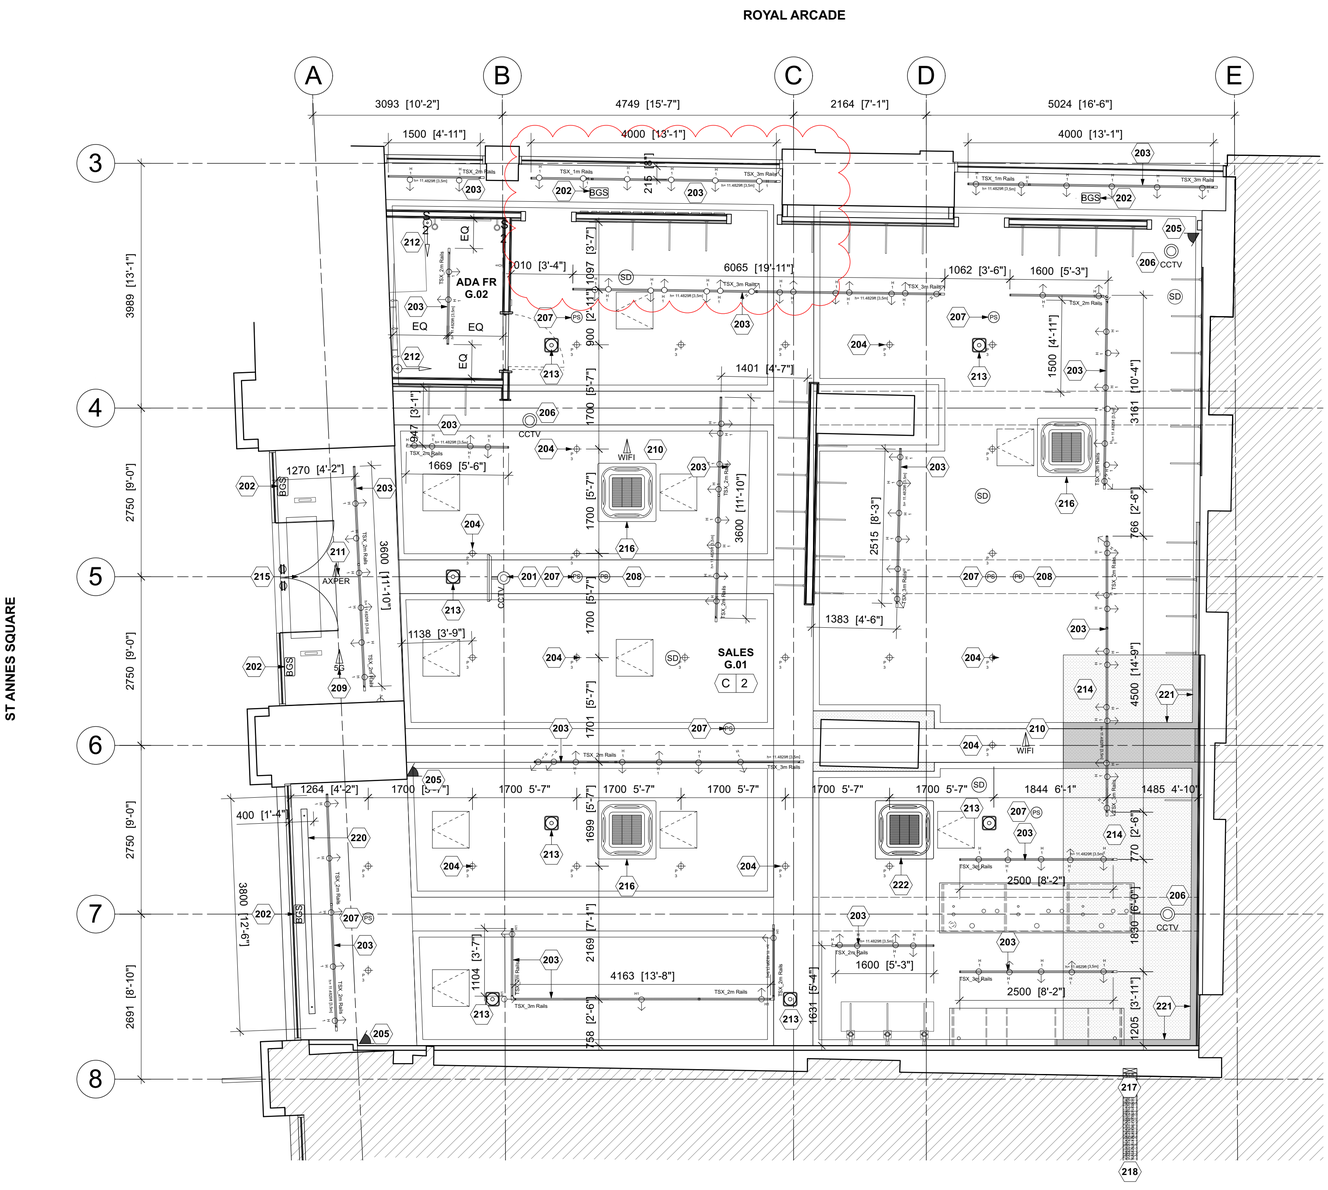


KEY NOTES

201 TO 218 SURFACE MOUNTED DOME CCTV CAMERA LINKED BACK RECORDING DEVISE.

202 SURFACE MOUNTED BROKEN GLASS SENSOR.

203 TRACK LIGHTING SYSTEM SUSPENDED FROM UNDERSIDE OF SOFFIT AT 2885MM ABOVE FFL.

204 PENDANT LIGHT FIXTURE SUSPENDED FROM UNDERSIDE OF SOFFIT AT 3500MM ABOVE FFL.

205 HIGH LEVEL WALL MOUNTED PIR DETECTOR.

206 SURFACE MOUNTED CCTV CAMERA LINKED BACK TO RECORDING DEVISE.

207 AUDIO SPEAKER SUSPENDED FROM UNDERSIDE OF SOFFIT AT HEIGHT TO MATCH CONTAINMENT.

208 AUDIO BASE MODULE SPEAKER SUSPENDED FROM UNDERSIDE OF SOFFIT.

209 SURFACE MOUNTED RJ45 DATA OUTLET FOR 5G EQUIPMENT.

210 SURFACE MOUNTED RJ45 DATA OUTLET FOR WIFI ACCESS POINT.

211 AXPER FOOTFALL COUNTER SUSPENDED FROM UNDERSIDE OF SOFFIT AT 3490MM ABOVE FFL ON GALVANISED STEEL CONDUIT. COUNTER SET 915MM FROM THE CENTRE THRESHOLD OF THE DOOR.

212 CEILING MOUNTED EMERGENCY PULL CORD.

213 3W 3 HOUR NON MAINTAINED EMERGENCY LIGHT SUSPENDED FROM UNDERSIDE OF SOFFIT.

214 NEW SUSPENDED PLASTERBOARD CEILING (HATCHED LIGHT GREY) TO MATCH WITH ADJACENT CEILING LEVEL 15MM GYPROC TAPERD EDGE WALLBOARD ON GYPCEILING MF SYSTEM, AND PLASTERBOARD BOXINGS/FALSE BEAMS (HATCHED DARK GREY) TO MATCH WITH EXISTING. ALL BOARD JOINTS AND FIXING HOLES TO BE SEAMLESS FINISHED AND PREPARE FOR DECORATION. CEILING TO LINE THROUGH WITH EXISTING ADJACENT CEILING.

215 EXISTING ELECTRIC AIR CURTAIN TO BE RETAINED.

216 EXISTING AIR CONDITIONING UNIT TO BE RETAINED.

217 REFRIDGERANT PIPEWORK ON CABLE TRAY DFA FROM ROOFTOP PLANT VIA SERVICES RISER.

218 REFRIDGERANT PIPEWORK ON CABLE TRAY DTB TO SERVE BASEMENT.

219 NEW SMOKE DETECTOR.

220 3340MM WIDE INTERNAL SIGN SUSPENDED BEHIND SHOPFRONT GLAZING AS 203X100MM POWDER COATED (ANODISED FINISH) ALUMINIUM LETTER CASINGS WITH 6MM WHITE SEMI TRANSLUCENT ACRYLIC FACE ON 40X40MM POWDER COATED (ANODISED FINISH) ALUMINIUM RACEWAY SECURED TO UNDERSIDE OF SOFFIT ON 15MM DIA. POWDER COATED (ANODISED FINISH) ALUMINIUM RODS.

221 NEW PLASTER CORNICING TO MATCH EXISTING. INSTALL TO MANUFACTURERS DETAILS, ENSURE ALL JOINTS ARE SANDED SMOOTH AND FLUSH AND PREPARE FOR DECORATION.

222 RELOCATED AIR CONDITIONING UNIT.

CEILING FINISHES

C-2 1No. COAT DULUX MULTI PURPOSE PRIMER FOLLOWED BY 2No. COATS DULUX TRADE 39YY 85/046 EGGSHELL FINISH.

LEGEND

OUTSIDE OF DEMISE AREA.

0 1 2 3 4 5

Scale bar (metres) 1:50

apt.design
Studio 1
31 Main Street, Kilby
Leicestershire, UK, LE18 3TD
Studio 2
2nd Floor, 22 Conduit Street
London, UK, W1S 2XR
W www.apt-design.co.uk T +44 (0)1858 469420

For Office Use: A_12746

ANTHROPOLOGIE

1-5 ST. ANNS SQUARE
MANCHESTER
M2 7EF

CONSULTANT :

DRAWN BY:
CC

ISSUE / DATE:

LISTED BUILDING CONSENT	18.08.2025

REVISION :

A LAYOUT AMENDED	22.08.2025
B WALL OPENINGS AMENDED	28.08.2025

SHEET TITLE :
GROUND FLOOR RCP

SHEET NO. :

LB201

Figured dimensions shall be taken in preference to scaled dimensions and any discrepancies or errors are to be referred to the Designer. Contractors, sub-contractors and suppliers must verify all dimensions on site before commencing work or making any fabrication drawings. © Copyright Reserved