


King Street
Entrance

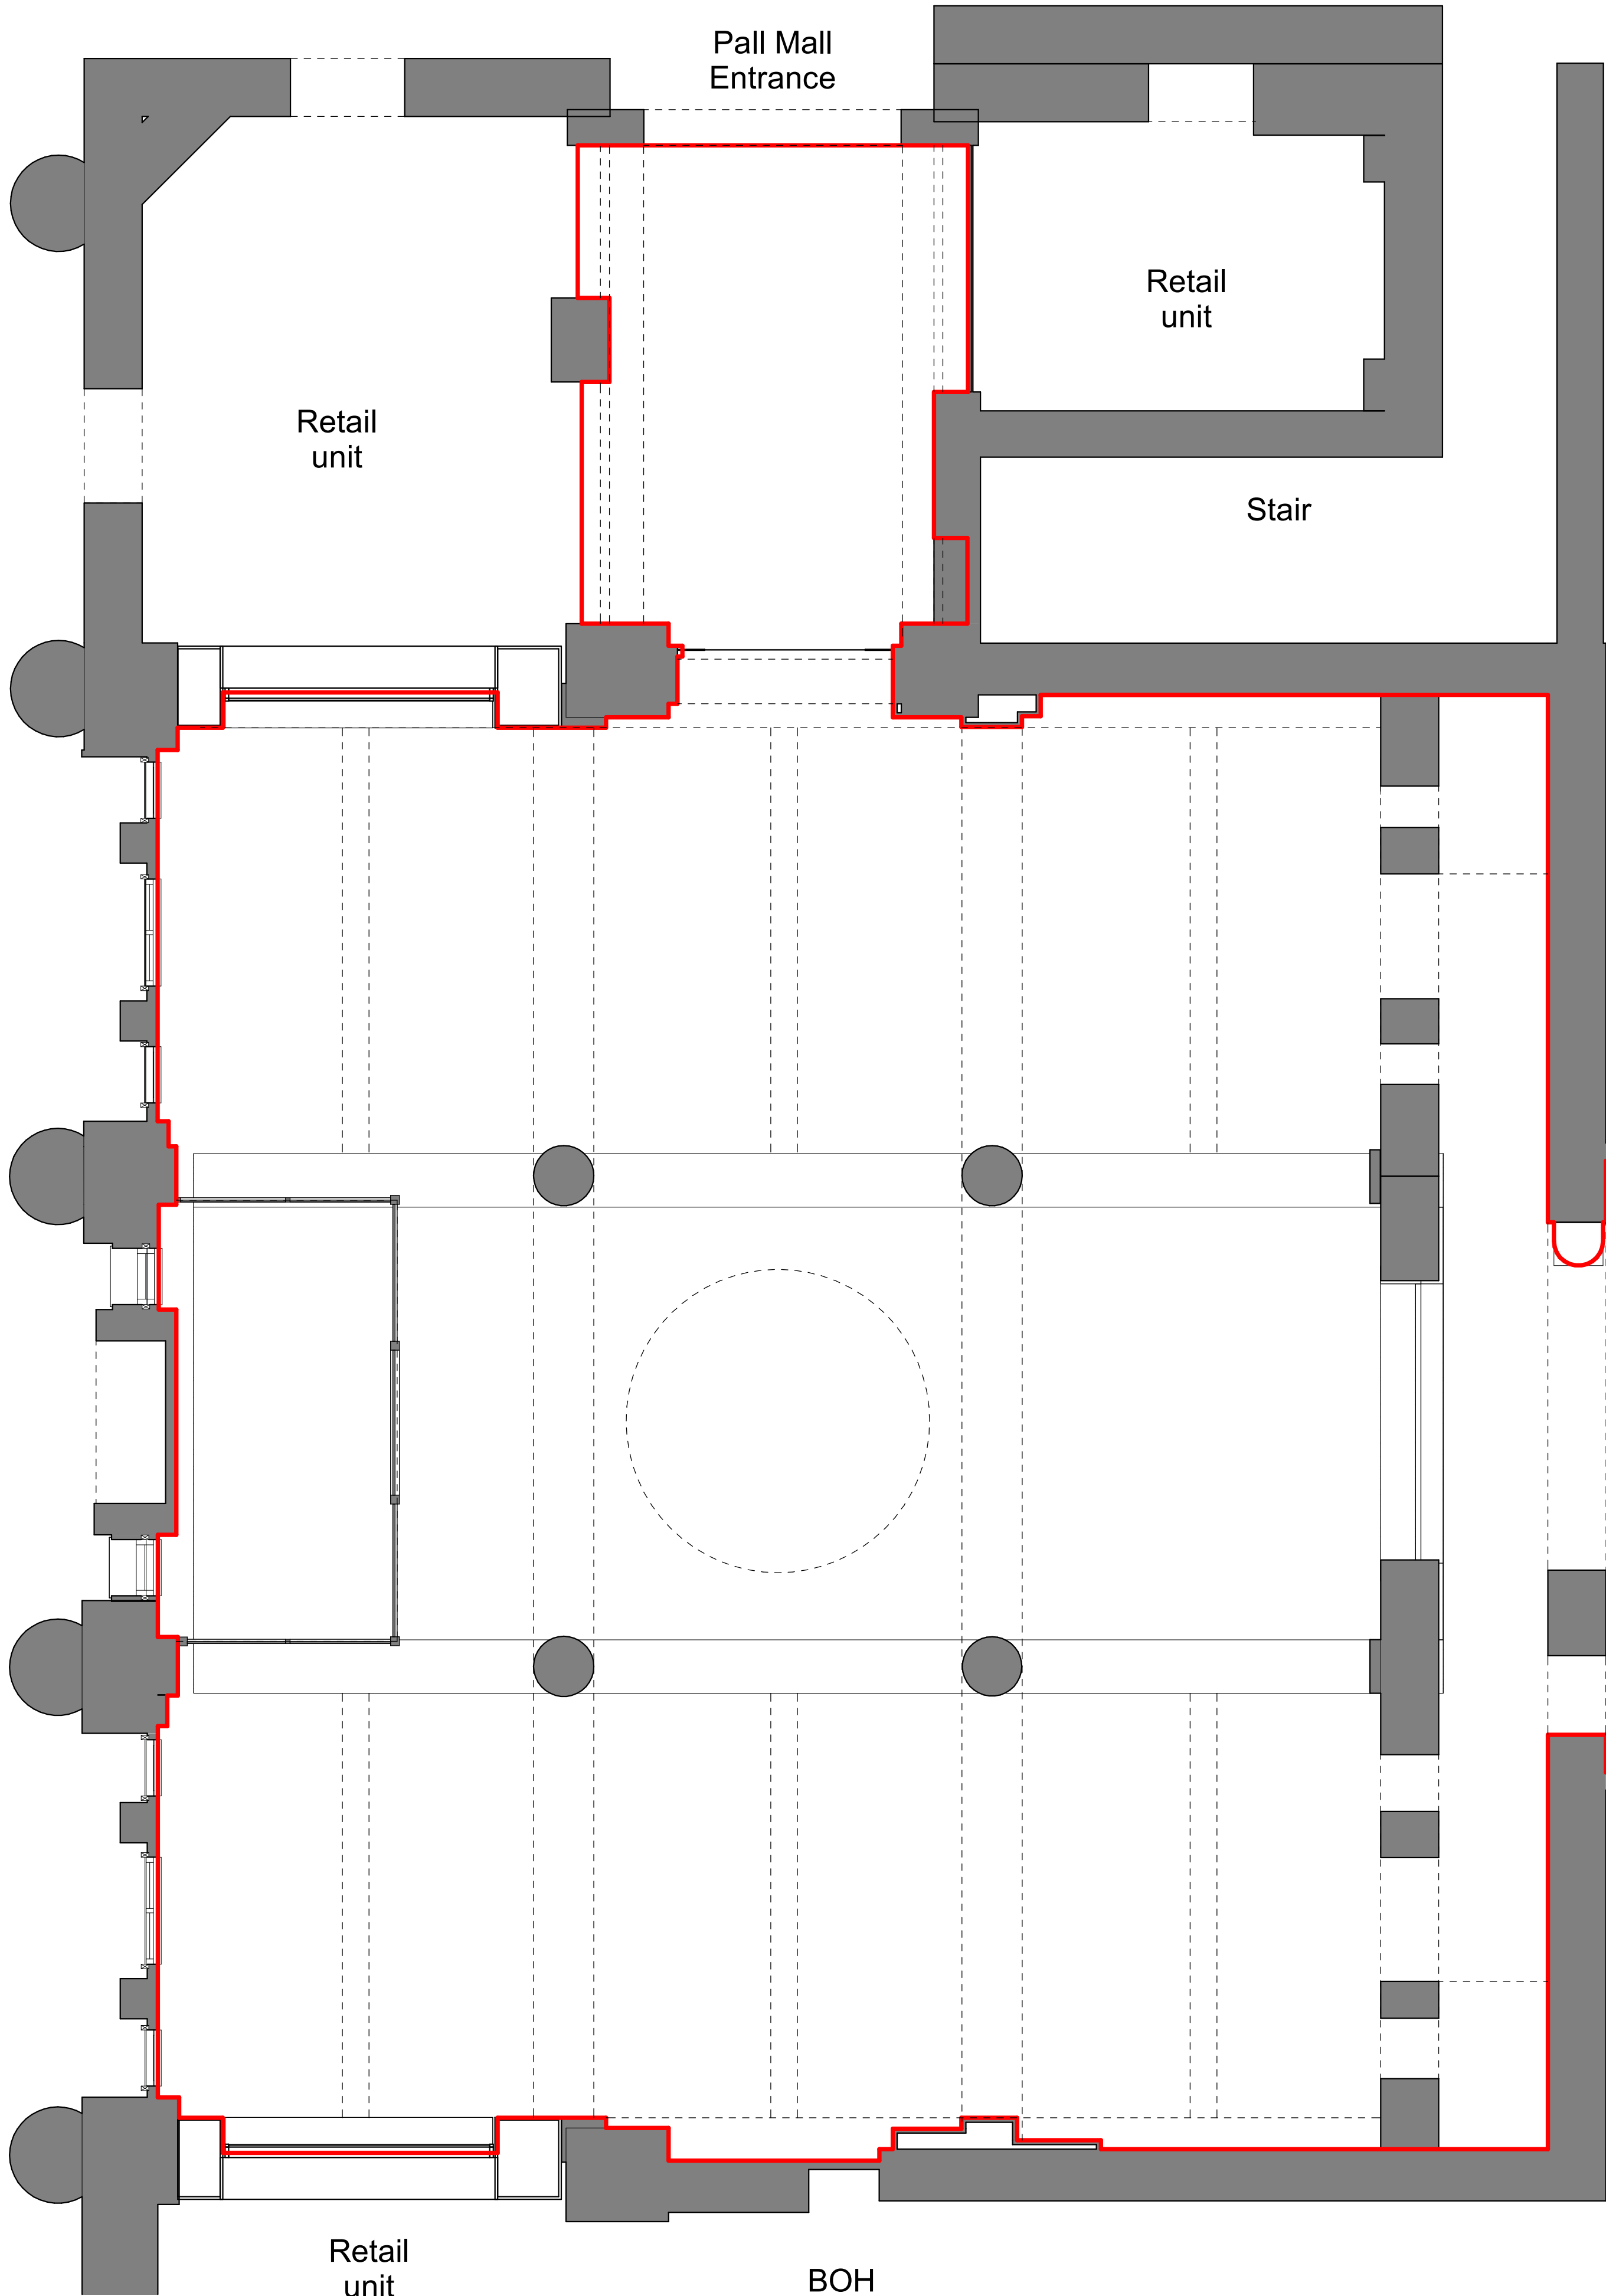

Pall Mall
Entrance

Retail
unit

Retail
unit

Stair

Ceilings to be reviewed and repainted to match
existing detailing. MEP specialist to review existing
lighting and propose new strategy.

Suspended ceiling to lift lobby to be retained and
made good.

Ceilings to be repainted.
Lighting and equipment to be reviewed by MEP
specialist.

BOH

Stair

Lift Lobby

Accessible
WC

BOH

Stair

Retail
unit

BOH

Notes

Do not scale from this drawing.

All dimensions are to be checked prior to
construction and any discrepancies are to
be identified to the Architect.

Copyright reserved.

Ground Floor Ceiling Type Legend

Type	Description
Ceiling Types	
CL-01	Glazed Entrance Vestibule
CL-50a	MR Plasterboard (Paint CLF-50)
CL-50b	MR Plasterboard (Paint CLF-51)
CL-51	MR Plasterboard Bulkhead (Paint CLF-51)
CL-52	Plasterboard Bulkhead - (Paint CLF-51)
CL-EX	Existing Ceiling & Finish Retained
CL-EX	Existing Ceiling Painted (Paint CLF-50)
Basement Lighting	
L-50	Recessed Spot Light
L-51	Pendant Light
L-52	Concealed LED Strip Light
All types subject to final fire & acoustic strategies. MEP specialist to review existing lighting and propose new strategy. Refer to FF&E Specifications for paint finishes.	

P01 02/05/25 For Information

Revisions

Purpose
For Information

Status Code
S2

Client
Priory Manchester Ltd

Project
82 King Street Manchester

Title
Ground Floor Ceiling Plan

Scale 1 : 50	Size A1	Date 02/05/25	Drawn JK	Checked NS
-----------------	------------	------------------	-------------	---------------

3DReid
www.3DReid.com
Architecture Interiors Masterplanning

Drawing No. 250009-3DR-ZZ-00-DR-I-35000	Rev. P01
--	-------------