

NOTE:
ALL DIMENSIONS TO BE SITE CHECKED AND
VERIFIED PRIOR TO MANUFACTURE.


OPENING SIZES NOTED TO EXISTING ARE
APPROXIMATE.

Door Schedule - Lower Ground Floor																	
Phase Created	Level	Door No.	Type Mark	To Room: Name	To Room: Number	Structural Opening Height	Structural Opening Width	Finish	Fire Designation	Acoustic Rating	Vision Panel	Ironmongery Set	Access Control	Hold Open	Wall Construction	NBSReference	Comments
Existing	Lower Ground Floor	ID-LG.001-02		STORE	B.001A	2110	775	Refurbish and paint	30S								Redecorate. New suited deadlocks and handles.
Existing	Lower Ground Floor	ID-LG.001-03		LOBBY	B.001	2110	1510	Refurbish and paint									Redecorate. Riser doors.
Existing	Lower Ground Floor	ID-LG.002-01		OFFICE	B.002	2370	1150	Existing glazed door	30S				Yes				Retained.
Existing	Lower Ground Floor	ID-LG.003-02	3C	BREAK OUT	B.003	2110	1190	Refurbish and paint									Redecorate. New handles and lock.
Existing	Lower Ground Floor	ID-LG.005-02		OFFICE	B.005	2110	1035	Refurbish and paint	30S								Redecorate. Riser doors.
Existing	Lower Ground Floor	ID-LG.005-03		OFFICE	B.005	2110	1810	Refurbish and paint	30S								Redecorate. Riser doors.
Existing	Lower Ground Floor	ID-LG.005B-01		SERVER	B.005B	2110	800	Refurbish and paint	60S								Redecorate. Retain.
Existing	Lower Ground Floor	ID-LG.006-01		KITCHEN	B.006	2110	1510	Paint									Redecorate. New push, pull handles and kick plate.
Existing	Lower Ground Floor	ID-LG.006-02		KITCHEN	B.006	2110	810	Paint									Redecorate. Remove access control. New push, pull handles, kick plates and door closer
Existing	Lower Ground Floor	ID-LG.007-01	3C	OFFICE	B.007	2240	1050	Refurbish and paint									Redecorate. New handles and lock.
Existing	Lower Ground Floor	ID-LG.008-01	3C	OFFICE	B.008	2240	1050	Refurbish and paint									Redecorate. New handles and lock.
Existing	Lower Ground Floor	ID-LG.010-01	3C	OFFICE	B.010	2240	1050	Refurbish and paint									Redecorate. New handles and lock.
Existing	Lower Ground Floor	ID-LG.011-01		PLANT ROOM	B.011	2110	1060	Refurbish and paint	60S								Redecorate.
Existing	Lower Ground Floor	ID-LG.012-01		CORRIDOR 6	C6	2110	1035		60S								Retained metal door.
Existing	Lower Ground Floor	ID-LG.012A-01		SUB-STATION	B.012A	2110	805		60S								
Existing	Lower Ground Floor	ID-LG.013-01		STAIR	S5	2110	1035		30S								Retained.
Existing	Lower Ground Floor	ID-LG.C8-02		CORRIDOR	C8	2110	1810		60S								Retained.
Proposed	Lower Ground Floor			BREAK OUT	B.003	2072	1044	Glazed		35dB	Yes		No	No	New Glazed Partition		
Proposed	Lower Ground Floor	ED-LG.005-04	2D			1950	1000	Laminate	60S	30dB	No		No	No	Existing Masonry		Push to exit. Panic bar hardware.
Proposed	Lower Ground Floor	ID-LG.001-01	2A	LOBBY	B.001	2110	1220	Laminate	30S	30dB	Yes		No	Yes	Existing Masonry		Push, pull handles and hold open on closer.
Proposed	Lower Ground Floor	ID-LG.003-01	2C	STAIR	S5	2370	1150	New glazed door	30S	30dB	Yes		Yes	No	Existing Masonry		Komfort specialist door glazed to match existing. Power assist/ push to open.
Proposed	Lower Ground Floor	ID-LG.005-01	2B	OFFICE	B.005	2000	1240	Laminate	Non	30dB	Yes		No	No	Existing Masonry		Pull, push handles and door closer.
Proposed	Lower Ground Floor	ID-LG.006A-01	2E	FORENSICS LAB	B.006A	2110	910	Laminate	Non	30dB	No		Yes	No	Existing Masonry		6 number digital lock, handle and access control.
Proposed	Lower Ground Floor	ID-LG.009-01	3B	OFFICE	B.009	2240	1050	Refurbish and paint	Non	As existing	No		No	No	Existing Masonry		Existing internal door, removed from room B.003 and fitted in room B.009. Redecorate. New handles and suited deadlock. Refurbished and size altered as required.
Proposed	Lower Ground Floor	ID-LG.C6-01	2A	CORRIDOR 6	C6	2000	1000	Laminate	30S		Yes		Yes	No	Existing Partition		
Proposed	Lower Ground Floor	ID-LG.C6-02	1A	STAIR	S5	2050	1615	Laminate	30S		Yes		No	Yes	Existing Partition		Push, pull handles and hold open on closer.
Proposed	Lower Ground Floor	ID-LG.C8-01	2A	CORRIDOR	C8	2000	1000	Laminate	30S		Yes		No	No	Existing Partition		Push to exit. Panic bar hardware.
Proposed	Lower Ground Floor	ID-LG.C8A-01	2A	LOBBY	C8A	2000	1000	Laminate	30S		Yes		No	No	New Partition		
Proposed	Lower Ground Floor	ID-LG.S2-01	2A	STAIR	S2	2000	1000	Laminate	30S		Yes		No	No	New Partition		
Proposed	Lower Ground Floor	ID-LG.S2-02	3A	STAIR	S2	2030	960	Refurbish and paint	Non	As existing	Yes		No	No	Existing Masonry		Existing external door, hung to open outwards and modified as required. Push to exit bar. See drawing.

NOTES:

- DO NOT SCALE FROM THIS DRAWING.
- ALL MEASUREMENTS ARE IN MILLIMETRES UNLESS STATED OTHERWISE.
- THIS DRAWINGS IS TO BE READ IN CONJUNCTION WITH THE SPECIFICATION AND ALL RELEVANT ARCHITECTURAL, ELECTRICAL, MECHANICAL AND STRUCTURAL DRAWINGS.
- UNIVERSITY OF MANCHESTER. THIS DRAWING MUST NOT BE REPRODUCED WITHOUT PERMISSION.
- DIRECTORATE O ESTATES AND FACILITIES TO BE NOTIFIED OF ANY DISCREPANCIES.

Scale Bars TO BE USED ONLY AS GUIDANCE



NOTES:

Drawings to be read in conjunction with Design Brief.

All dimensions are structural opening sizes (SO).


All dimensions to be checked on site prior to manufacture.

All frame sized subject to final design by manufacturer.


All Doors & Side Screens to incorporate a compliant safety glass below 1500mm from FFL and all glazing to be in accordance with Approved Doc Part N & comply with BS6206. SG = A compliant safety glass

Where necessary all compliant glazing/ vision panels to windows and door screens to be fitted in strict accordance with the manufacturer's recommendations/ specifications - complying with Approved Documents Parts N & B.

All door ironmongery to meet BS8300 and Approved Document Part M, handles to be contrasting visually with the door surface and mounted between 900-1100mm high.

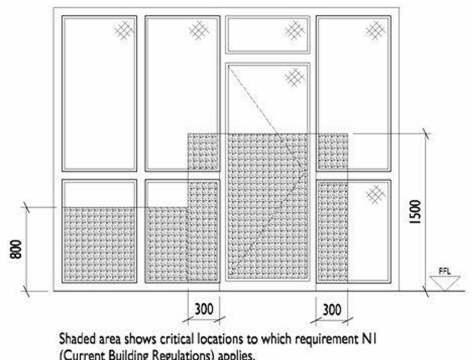

All full height glazing to have applied manifestation to meet BS8300 (in the form of a logo or shape to be confirmed by client). Different colour or style to doors are advisable.

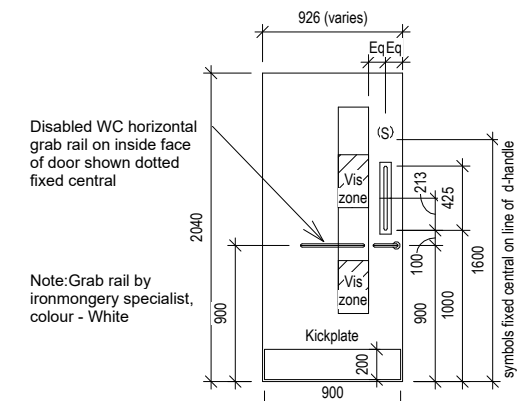

P04 Stage 4 Tender Issue	21.08.25	MD
P03 Stage 4 Issue	24.07.25	MD
P02 Stage 4 Draft Issue	04.07.25	MD
P01 Issued for comment	11.06.25	MD
Rev Description	Date	By

MANCHESTER1824

The University of Manchester

Directorate of Estates and Facilities
Beyer Building
The University of Manchester
Oxford Road
Manchester
M13 9PL

Fairhursts:

Fairhurst Architects
5th Floor
31 Dale Street
Manchester
M1 1EY
+44 (0)161 831 7300

Drawing Status		STAGE 4	
Project University of Manchester ITS & Computer Science			
Building Name Eddie Newcomb		Building No.	
Site Name Burlington Street			
Sub Site Name			
Drawing Title Lower Ground Floor Door Schedule			
PM Avision Young	Drawn MD	Checked KMD	Authorised
Scale @A1 As indicated	Date 21.08.25	Date 21.08.25	Date
Drawing No. 7808-FA-EN-ZZ-SR-A-41100			Revision P04