

Note: No unauthorised excavations are to be carried out within the RPAs of any retained trees. Any level changes must form part of a construction method statement & must protect the rooting environments of all retained trees.

Note: No unauthorised excavations are to be carried out within the RPAs of any retained trees. Any level changes must form part of a construction method statement & must protect the rooting environments of all retained trees.

**Existing
Learn to Ride**


**Existing
Pump Track**

Proposed Skate Area

Relocated Shipping Containers

Relocated Kitchen Cabin

Relocated Athletics Changing

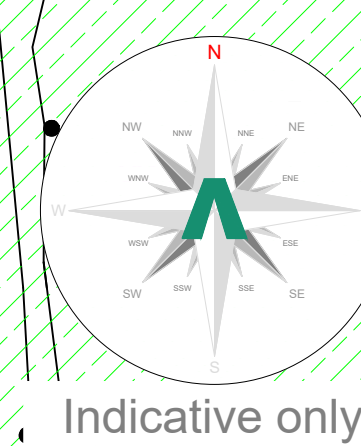

Indicative only

Tree Categories

Trees are categorised in accordance with the cascade chart in Table 1 for the British Standard BS 5829:2012. Trees in relation to design, demolition and construction - Recommendations*

- Category 1* Trees in such condition that they cannot be realistically be retained for longer than 10 years.
- Category 2* Trees in such condition that they have an estimated remaining life expectancy of at least 10 years.
- Category 3* Trees in such condition that they have an estimated remaining life expectancy of at least 20 years.
- Category 4* Trees of low quality with an estimated remaining life expectancy of at least 30 years, or young trees with a stem diameter below 150mm.

Root Protection Area

In order to avoid damage to the roots or rooting environment of retained trees, the Root Protection Areas (RPAs) should be plotted around the trees in accordance with BS 5829:2012. The minimum area in m² which should be left undisturbed around each retained tree.

The RPA is calculated using the British Standard BS 5829:2012. Trees with a diameter of less than 75mm are categorised as 'small trees'. The calculated RPA is capped to 707m², which is the equivalent to a circle with a radius of 15m. Where there appears to be restrictions to root growth, the RPA should be increased to move accordingly.

The RPA is the area within which the roots of the tree are expected to freely distribute of the roots.

Impacts	Nos. of trees
Trees to be removed	7
Groups / Hedges to be removed (Partial removal of groups)	0 (2)
Trees with proposed incursions into RPA's	6
Groups / Hedges with proposed incursions into RPA's	1
Trees that will require pruning	0
Groups / Hedges that will require pruning	0
Trees to be transplanted	0
Groups / Hedges to be transplanted	0

No. of individual trees to be removed			
U	A	B	C
0	0	4	3

No. of groups / hedges to be removed			
U	A	B	C
0 (2)	0 (2)	0 (2)	0 (2)

Arboricultural Method Statement

All tree work is to be undertaken in accordance with British Standard BS 3998. Please refer to Arbrech Consulting Ltd, Tree Schedule, Arboricultural Method Statement and Tree Protection Plan, for full details of all surveyed trees and how all aspects of the development works are implemented without obstruction to, or injury to, trees.



Unit 3, Well House Barns, Chester, CH4 0DH
<https://arbtech.co.uk>, 01244 661170

Project: Wythenshawe Park Sports Hub,
Wythenshawe Road,
Manchester,
M23 0PH.

Client: Etec Contract Services.

Drawing:
Arboricultural Impact Assessment

Based on:
118165-NPS-XX-00-D-A-0803-P11

Drawing No: Arbtech AIA 01 - Sheet 2 of 3

Date:	Scale:	Drawn:
Sep 2025	1:300 @ A0	AST

Key:

Tree No.:	T1	Tree Canopies:		Trunks:	
					

RPA's:		Category 'U' trees:		Category 'U' groups:	
Category:		Category 'A':		Category:	

'A' trees:		groups:		'B' trees:	
Category 'B'		Category		Category	

groups:		C trees:		C groups:	
Tree to be	T2	Insertion - Access rd		Insertion - Proposed	

terminals:		widening:		footpath:	
Proposed tree					

All dimensions should be checked on site. No dimensions are to be scaled from this drawing. Please notify us of any discrepancies found. Artstech Consulting Ltd. cannot be held responsible for inaccuracies in the base drawing in which this plan is based.

This drawing is designed to reflect the principles of the layout or design only, and relates only to the protection of

This drawing is not to be read as a definitive part of the engineering or construction designs or method statement. An architect or structural engineer should be contacted over any matters of construction, detailing or specification and for any standards or regulatory requirements relating to proposed structures, hard surfacing or underground services.

This drawing was produced in colour - a monochrome copy should not be relied upon.