




87 Rochdale Road Manchester M4 4JD
Application Number – 131708/FO/2021
Condition 9 – Materials Schedule

25th September 2023

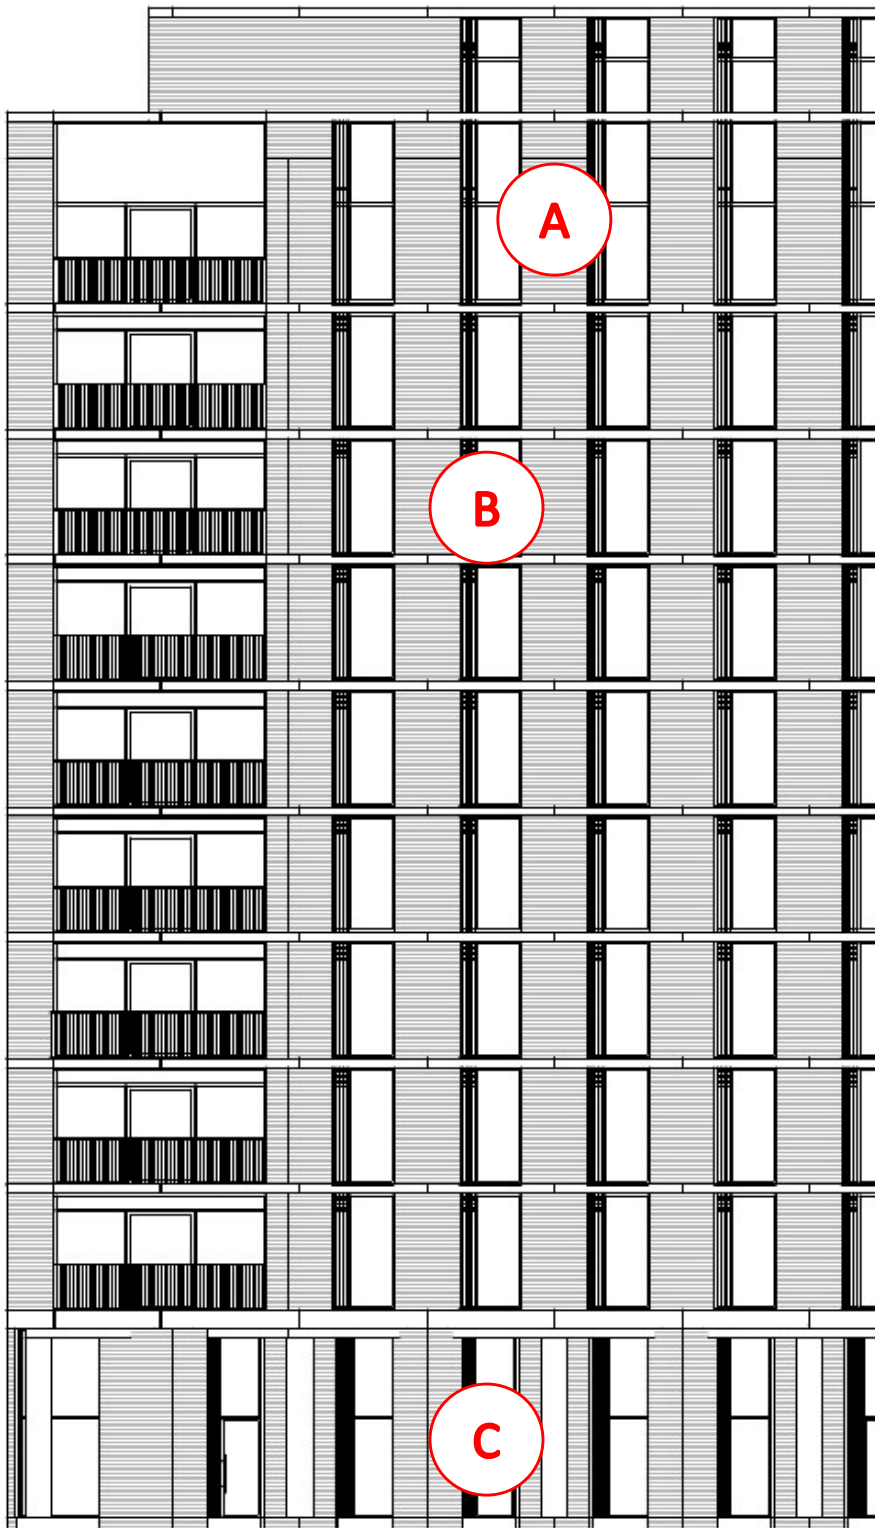


Material Key: -

A – Facing Brick

B – Window

C – Curtain Walling

Block 1 – Proposed Façade Materials

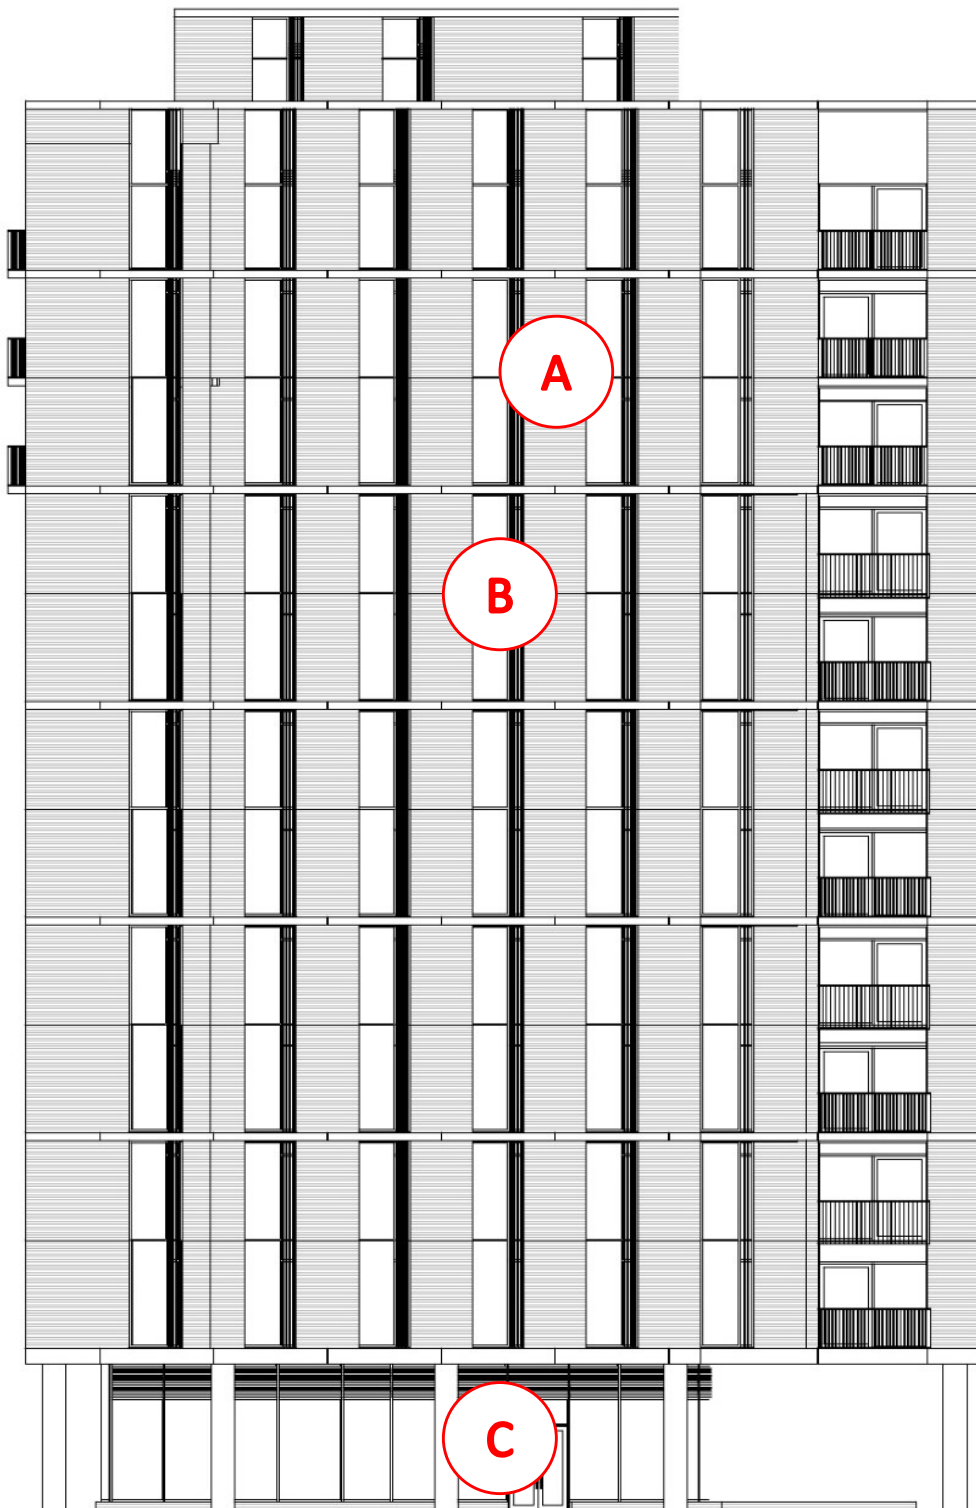


Material Key: -

A – Facing Brick

B – Window


C – Curtain Walling

Block 2 – Proposed Façade Materials

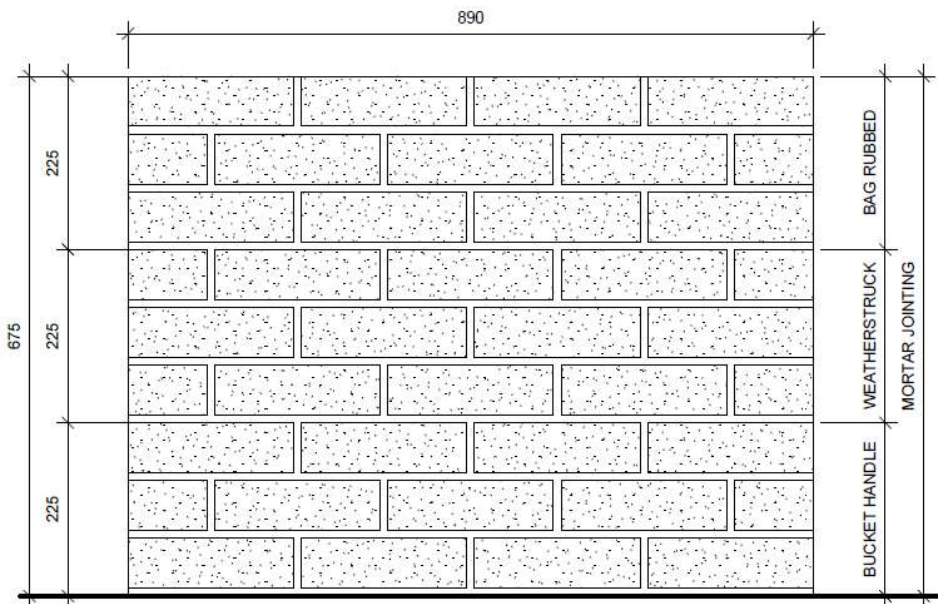

Facing Brick – Urban
 Weathered
 Bond – Stretcher
 Jointing – To be agreed
 with full size bay sample
 Mortar – Flomix FL107
 Dark Terracotta

Block 1 – Proposed Facing Brick

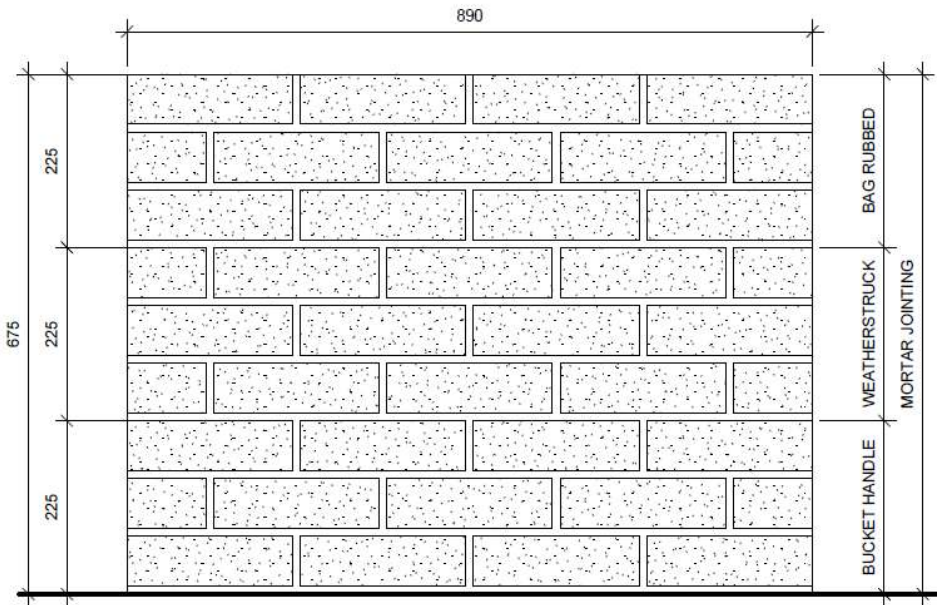

Facing Brick – Con Mosso
(subject to approval
dated 29/09/2023)

Bond – Stretcher
Jointing – To be agreed
Mortar – Flomix FL11
Light Charcoal

Blocks 2, 3 & 4 – Proposed Facing Brick



Proposed Window – All Blocks



RAL 7015
SLATE GREY


Proposed Curtain Walling – All Blocks



PPC Aluminium RAL 7015
for: -


- Curtain Walling,
- Windows,
- Feature vertical Fins,
- Balcony Soffits,
- Balustrades

Feature Vertical Fins (example project) – Blocks 1 & 2

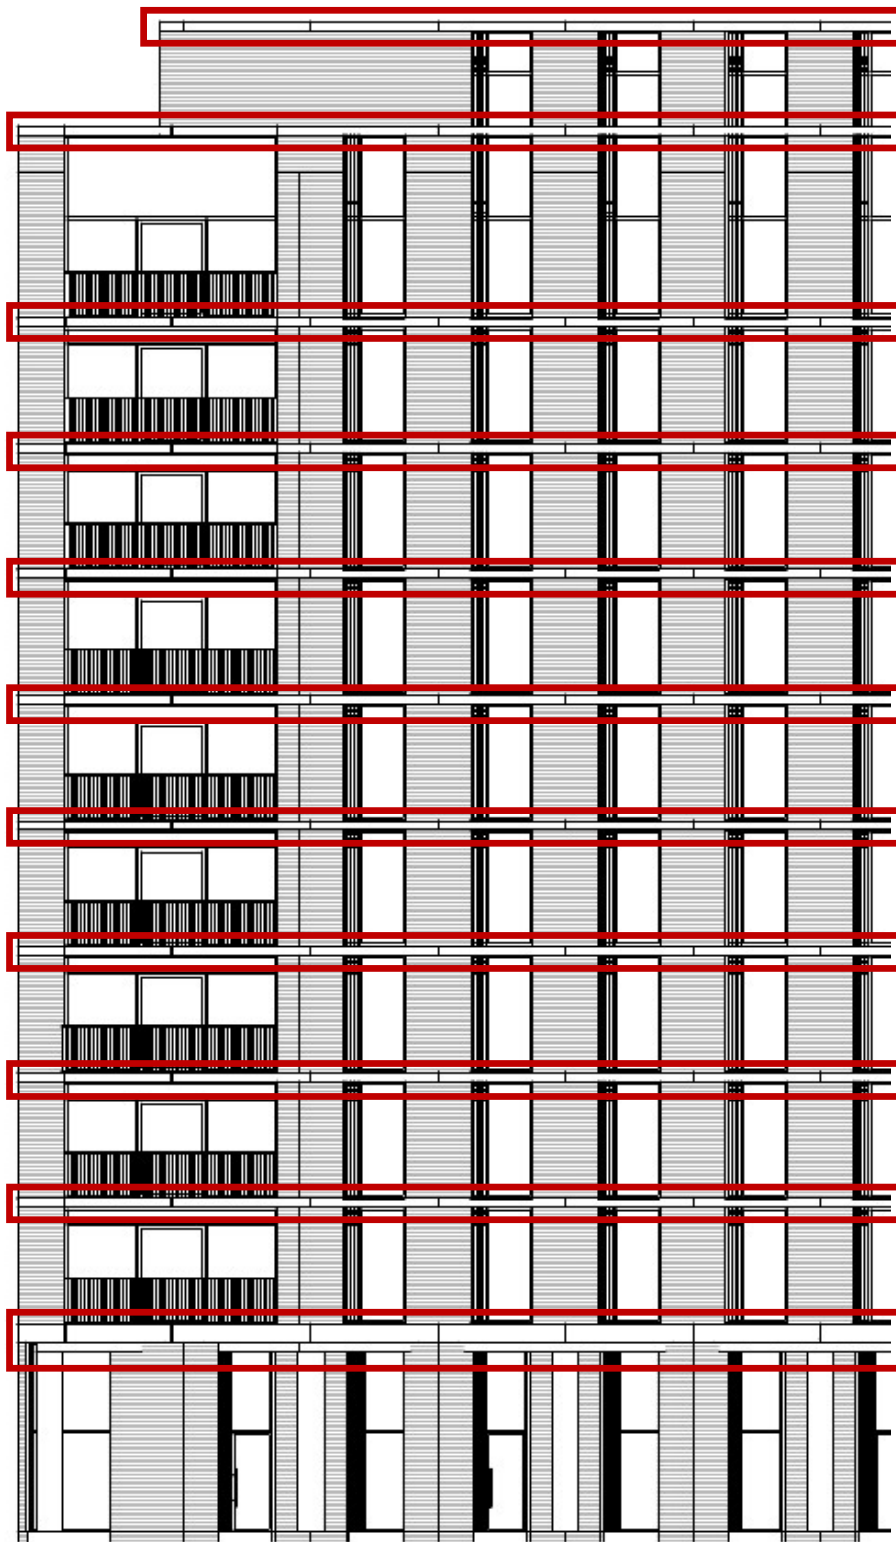

Wet cast concrete
feature band to match
red facing brick by
Woodside Cast Stone.
Vertical joint to match
brickwork detail.


Block 1 – Feature Concrete Band

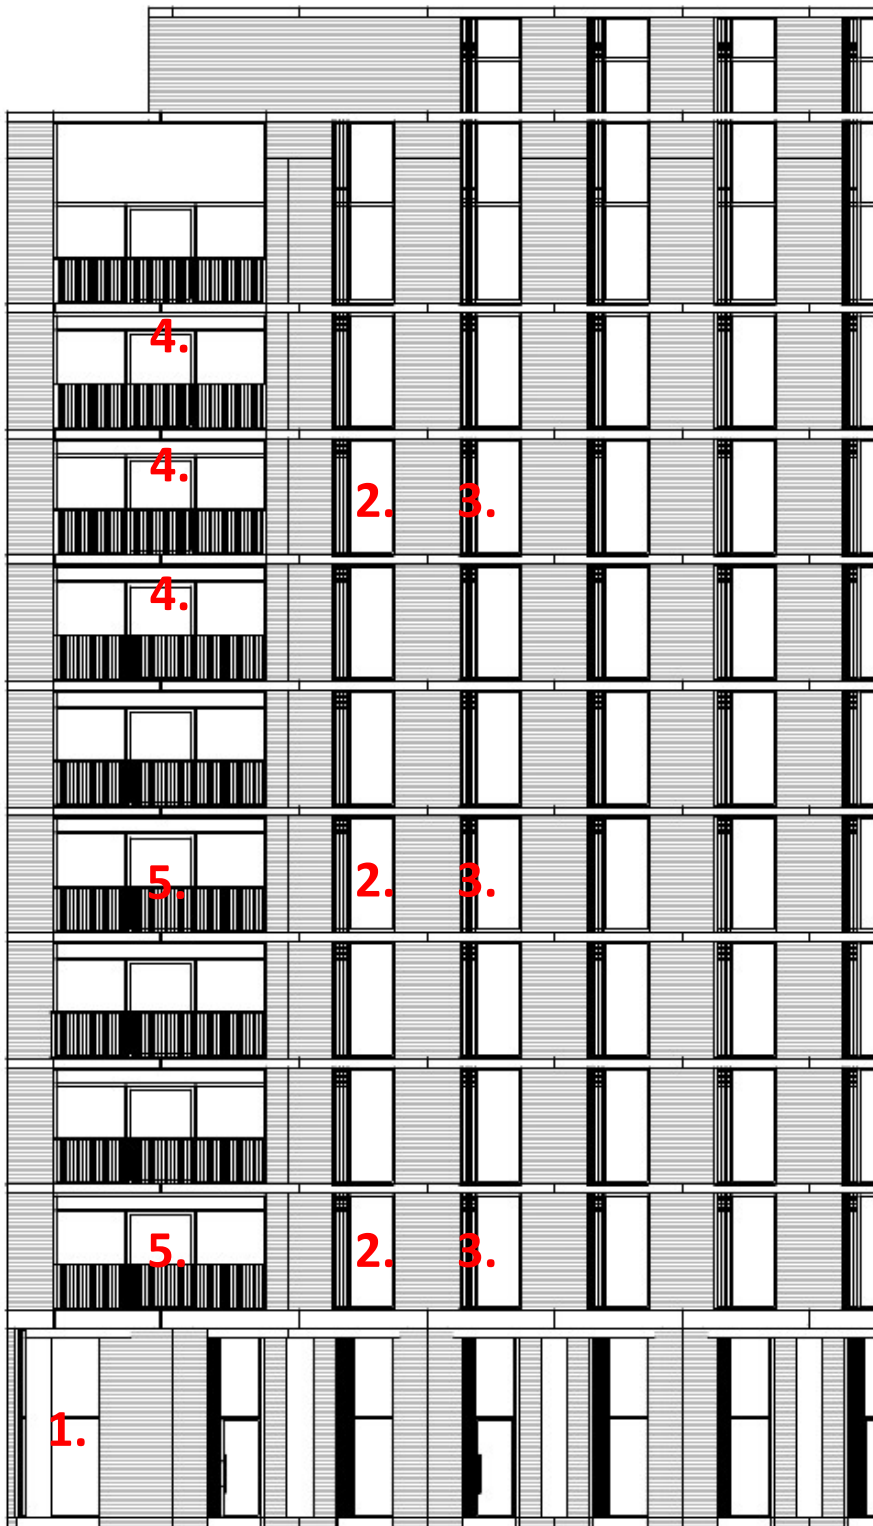

PPC Aluminium RAL 7015
for: -

1. Curtain Walling,
2. Windows,
3. Feature vertical
Fins,
4. Balcony Soffits,
5. Balustrades

Polyester Powder Coated Aluminium – All Blocks

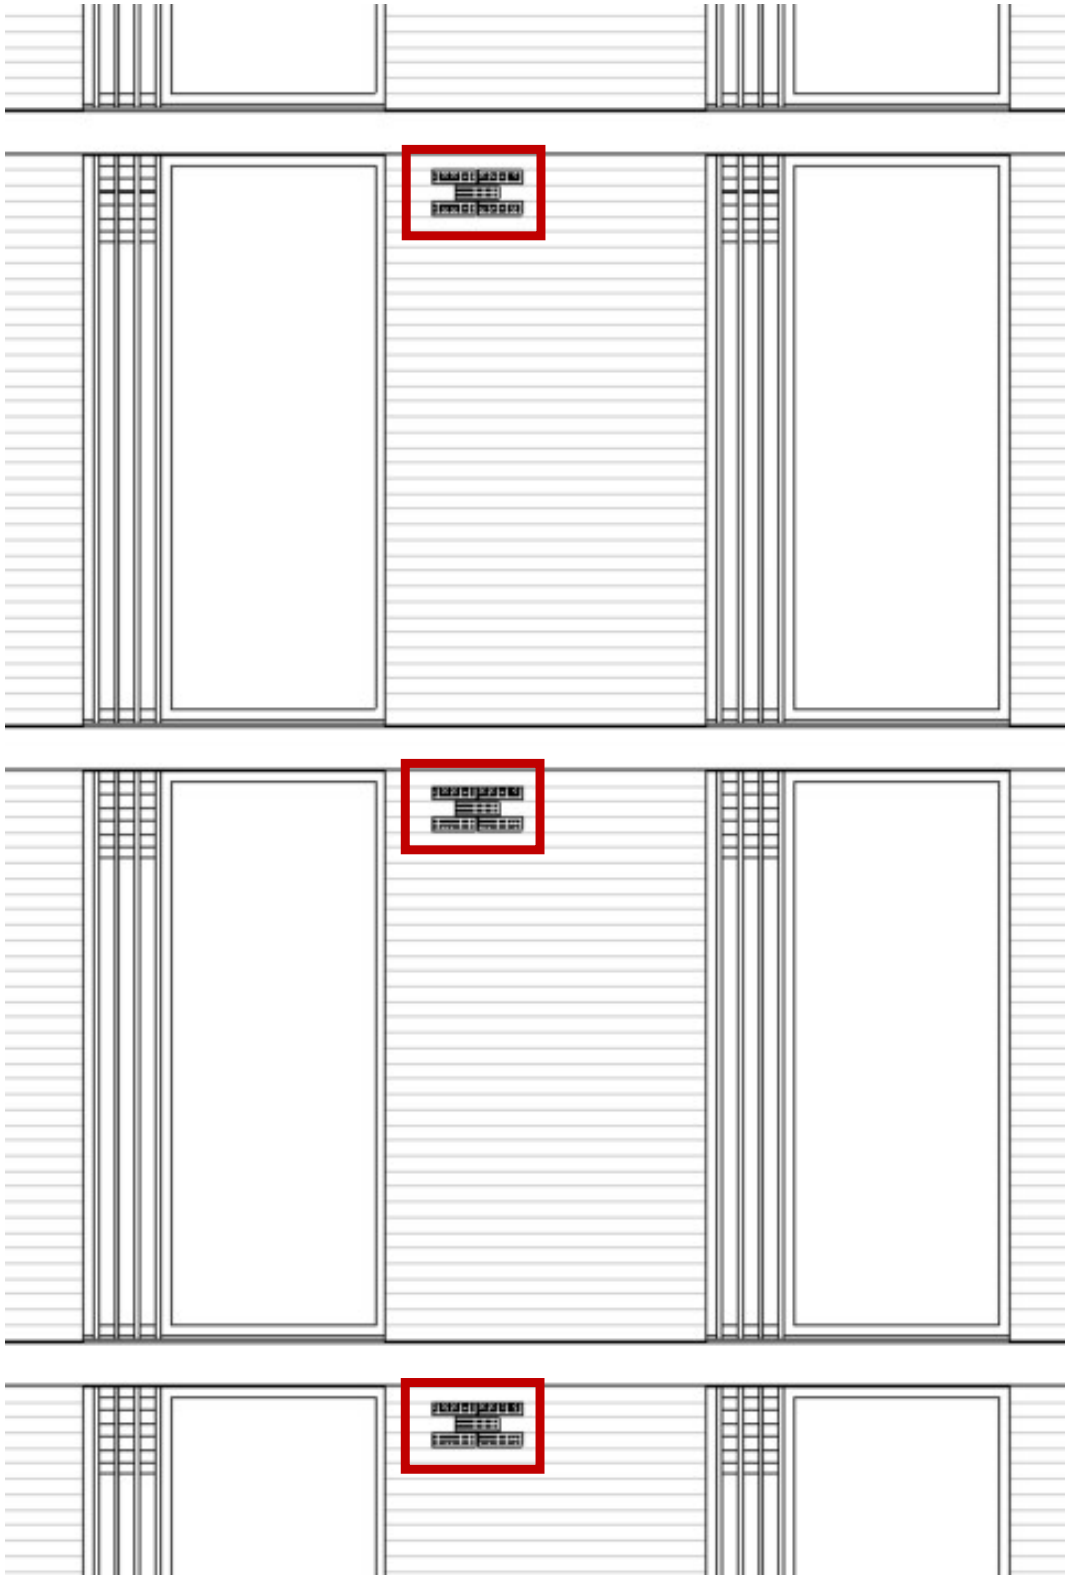

Preformed 25mm thick
brick slip panel in
corresponding bricks to
match the Staycity
Aparthotel building on

Airbricks – All Blocks



Con Mosso

Product Technical Information Sheet


Wienerberger Code	134210
Production Plant	Thorn (Netherlands)
Manufacture	Soft Mud Moulded Stock
Configuration	Frogged
Colour	Cream Multi
Appearance	Creased
Work Size (mm)	215 x 102.5 x 65
Pack Quantity	552 No.
Individual Dry Brick Weight (kg)	2.3

Technical Properties to BS EN 771-1

Size Tolerance (Mean/Range)	T2/R1
Gross Dry Density (kg/m ³ /Tolerance)	1700 (D1)
Compressive Strength (N/mm ²)	≥25
Thermal Conductivity (W/(m·K)) $\lambda_{10, dry, unit}$ value (EN 1745 tabulated: S1)	P=90% 0.45
Durability Designation	F2
Water Absorption (%)	≤12
Initial Rate of Water Absorption (kg/(m ² ·min))	Min. 0.3 Max. 2.0
Active Soluble Salts	S2
Reaction to Fire	Class A1

Issue Date: 12/10/2020

Technical data correct at time of issue. Individual dry brick weights can vary and are for guidance only. Any questions regarding this data should be referred to the Wienerberger Technical Department. Due to the limitations of screen and print colour representation of product images it is advised that brick samples are viewed prior to ordering.

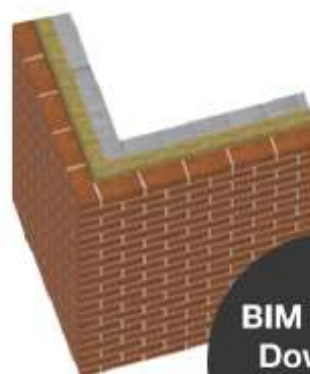

**BIM Objects
Download**



1000+ products to choose from



Expert help and advice



Comprehensive Design Services



Technical Support

✉ Wall and Landscaping enquiries

☎ 0161 491 8200

🌐 www.wienerberger.co.uk

Product Literature – Facing Brick for Blocks 2, 3 & 4

McGOFF
CONSTRUCTION

DECLARATION OF PERFORMANCE			
Category 4 comprising of Country Blend Farmhouse Orange Imperial Blend Olde Reclamation Clamp Olde Reclamation Shire Reclamation Shire Blend Tudor Multi Brick/Paver Urban Weathered			
			
CAT 4S - TH - 2020			
Group HD, Category II Handmade Clay Bricks			
Intended use or uses of the construction product, in accordance with with applicable harmonised technical specification, as foreseen by the manufacturer: Facing clay masonry unit for internal or external use, load bearing or non load bearing masonry structures			
ESSENTIAL CHARACTERISTICS	PERFORMANCE		HARMONISED TECHNICAL SPECIFICATION
Dimensional Tolerances mm	65 x 215 x 102.5 73 x 215 x 102.5 50 x 230 x 110 68 x 230 x 110 73 x 230 x 110 48 x 288 x 88		BS EN771-1:2011
	Tolerance	T1	
	Range	R1	
Compressive Strength (Standard shape, tested normal to the bed face of the unit) N/mm ²	Mean	79.1	
	Category	II	
Dimensional Stability N/mm ²	NPD		Commission Decision 2000/605/EC
Bond Strength Flexed value N/mm ²	NPD		
Active Soluble Salts	S2		
Reaction to Fire	A1		
Water Absorption %	9		BS EN771-1:2011
Water Vapour Permeability	NPD		
Direct Airborne Sound Insulation kg/m ² (gross)	NPD		
Thermal Properties	NPD		
Durability Against Freeze Thaw	F2		
Dangerous Substances	NPD		
The performance of the product(s) identified above is in conformity with the declared values			
Signed for and on behalf of the manufacturer by:  Jason Hughes, Managing Director September 2020			Imperial Bricks Crowgrave Farm Stableford Bridgnorth Shropshire WV15 5LT

Product Literature – Facing Brick for Block 1