



## SUMMARY FAN DATA SHEET

Nuaire, Western Industrial Estate, Caerphilly, CF83 1NA, United Kingdom. email:info@nuaire.co.uk

UK Commercial enquiries T:029 2085 8200 UK Residential enquiries T:029 2085 8500 International enquiries T:+44.29 2085 8497

Whilst the information given on this data sheet is fan specific, it is in summary and reference to the product selection catalogue and installation & maintenance documents is recommended.

This data sheet produced on 22 Feb 2023 16:34 using software version 5.8.4559.0

### Technical Data

#### MRXBOX-ECO - Wall Mounted Multi Room Xbox

Fan Code: **MRXBOXAB-ECO5**

Maximum Fan Speed: 4,120 RPM  
Electrical Supply: 230V, 1 Phase, 50 Hz  
Nominal Motor Rating: 0.34 kW  
Motor current (flc): 2.8 A  
Motor starting current (sc): 2.8 A

Max. operating temp: 40°C  
Weight: 25 kg

Starting currents are nominal.

### Sound Data

Acoustic performance to ISO 13347 and AMCA 300.

Noise calculated speed controlled to required duty (100%)

Sound Power Levels re 1 pWatts (Hz):

| Hz                             | 63 | 125 | 250 | 500 | 1k | 2k | 4k | 8k | dBA |
|--------------------------------|----|-----|-----|-----|----|----|----|----|-----|
| Breakout                       | 70 | 59  | 62  | 62  | 53 | 51 | 44 | 30 | 44  |
| Open Inlet (Intake & Extract)  | 62 | 63  | 64  | 62  | 56 | 47 | 37 | 32 |     |
| Open Outlet (Supply & Exhaust) | 70 | 70  | 72  | 76  | 70 | 66 | 58 | 52 |     |


dBA is hemi-spherical at 3 metres. For spherical deduct 3 dBA.

#### MRXBOX-SIL2

|                  |     |     |    |     |     |     |     |     |
|------------------|-----|-----|----|-----|-----|-----|-----|-----|
| Supply/Discharge | -11 | -10 | -9 | -14 | -23 | -26 | -20 | -15 |
| Intake/Extract   | -8  | -10 | -9 | -10 | -22 | -24 | -16 | -13 |

Please note that the noise data stated on this data sheet for the unit and/or silencer is tested in accordance with UK, European and International industry laboratory standards. However onsite conditions may vary and we would recommend that this information is verified by an acoustic specialist in order to ensure its suitability for the intended application.

### Performance Chart

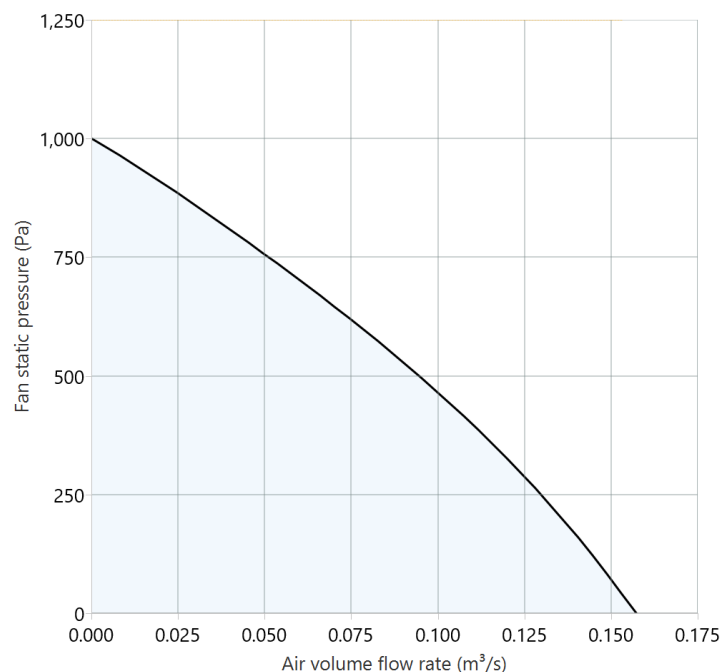

### Selected Ancillaries

1 x MRXBOX-SIL2 Silencer (Not Enclosure)

**MRXBOX-SIL2 - Silencer (Not Enclosure)**

Size: 353 mm (L) 605 mm (W) 445 mm (H)

Weight: 10.0 kg

### Specification

The unit shall be fully insulated providing excellent thermal and acoustic characteristics and shall be complete with a multi plate counter flow high efficiency heat exchanger block, with a thermal efficiency of up to 95%. The heat exchanger shall be protected by filters on fresh air inlet and system extract. The heat exchanger and filters shall be accessible via the front access panel, enabling quick and easy maintenance.

The unit shall have low energy, high efficiency EC fan/motor assemblies with sealed for life bearings, the impellers shall be backward curved centrifugal type. The motors shall be suitable for an ambient temperature of 40°C.

The unit shall be supplied complete with a condensate drip tray and 21.5mm drain connection.

The unit shall be suitable for 150mm circular ducting.

The breakout noise level and power requirements shall be as detailed by the unit manufacturer and in accordance with the ventilation equipment schedule.

The unit shall be offered with a five year warranty. The product warranty applies to the UK mainland and in accordance with Clause 14 of our Conditions of Sale. Customers purchasing from outside of the UK should contact Nuaire International Sales office for further details.

Nuaire, Western Industrial Estate, Caerphilly, CF83 1NA, United Kingdom. email:info@nuaire.co.uk


UK Commercial enquiries T:029 2085 8200 UK Residential enquiries T:029 2085 8500 International enquiries T:+44.29 2085 8497

Whilst the information given on this data sheet is fan specific, it is in summary and reference to the product selection catalogue and installation & maintenance documents is recommended.

This data sheet produced on 22 Feb 2023 16:34 using software version 5.8.4559.0

## Fan Dimensions

SPIGOT CONFIGURATION SHOWN IS VALID FOR THE STANDARD HANDED UNIT ONLY. OPPOSITE HANDED UNIT IS ALSO AVAILABLE UPON REQUEST.

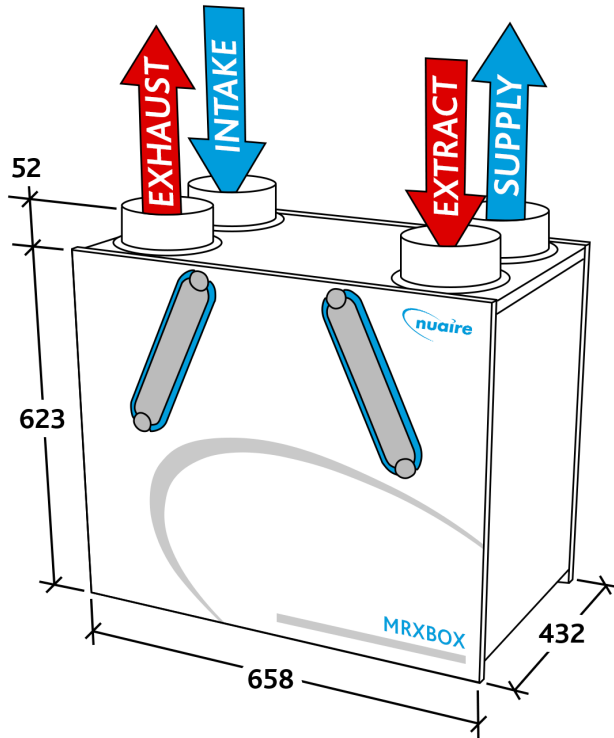

Length: Width: Height:  
432 658 623

Spigot size: 150

Duct size: 150

Drawing is for dimensional purposes only. Dimensions in mm.

**Please see selected ancillaries section for additional dimensions for any requested additional ancillaries.**

## SAP Appendix Q Test Results

| Application           | Specific Fan Power (W/l/s) | Heat Exchange Efficiency % |
|-----------------------|----------------------------|----------------------------|
| Kitchen + 1 wet room  | 0.63                       | 90%                        |
| Kitchen + 2 wet rooms | 0.61                       | 89%                        |
| Kitchen + 3 wet rooms | 0.68                       | 88%                        |
| Kitchen + 4 wet rooms | 0.79                       | 87%                        |
| Kitchen + 5 wet rooms | 0.91                       | 86%                        |
| Kitchen + 6 wet rooms | 1.09                       | 85%                        |
| Kitchen + 7 wet rooms | 1.27                       | 85%                        |