

CLD Securus S1

358 rigid mesh fencing system to LPS 1175 A1 (SR1) Issue 8



Minimum Delay of 60 seconds delay against attack

Securus is CLD's range of specialist security fencing. Traditionally referred to as prison mesh or 358 mesh, the Securus range has been updated complete flexibility – the panels can be swapped out to change the security rating as the needs of the site change. Securus S1 has been certified by the Loss Prevention Certification Board to provide a minimum of 60 seconds delay against attack.

For full technical information please see overleaf.

Ideal for


- Data Centres
- MoD
- Utilities
- Ports & Airports



Conforms to



Isometric View

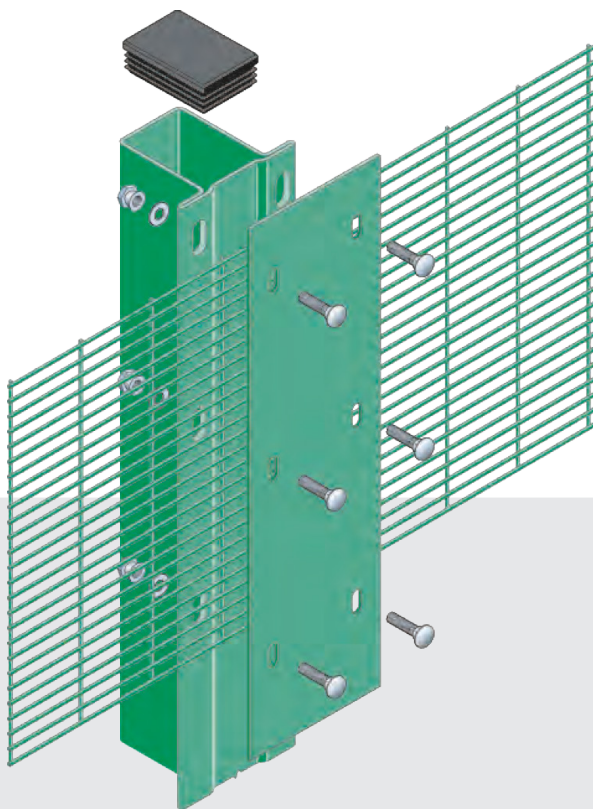

Exploded view of post and fixing details for the CLD Securus S1
This product has additional features not demonstrated for security reasons

Key Features

Attractive appearance

Anti climb wire

Rolled flanged post design

Optional active anti-intruder toppings

Full range of RAL colours available

Base plate and ground bury options available

Scan the QR code to find out more



CLD Securus S1


358 rigid mesh fencing system to LPS 1175 A1 (SR1) Issue 8




Product Technical Information

Standards:	LPS 1175 A1 (SR1) Issue 8 BS EN ISO 1461:2009 Secured by Design - Police Preferred Specification	BS1722-14: 2017 BS EN 13438:2013
Panel type:	Mesh and wire. Galvanised and powder coated.	
Panel width:	2518mm	
Wire diameter:	4mm	
Mesh size:	76.2 × 12.5 mm mesh	
Height:	1830mm to 5000mm	
Nominal heights:	1.8m to 5m	
Finish:	Polyester powder-coated to minimum 60 microns. Any RAL colour.	
Top Edge projection:	nil	
Panel installation:	Bottom of panel minimum 50mm above ground -300mm ground bury optional	
Topping options:	Options available on request.	
Posts:	Special flanged post, galvanised after manufacture and polyester powder-coated to match fencing	
Post dimensions:	80mm x 60mm. Corner posts: 80mm x 80mm. End posts: 80mm x 80mm.	
Post centres:	2515mm +/- 9mm	
Fixings:	120mm x 6mm full length clamp bar. M8 Stainless Steel cup square bolt (min 30mm)	
Foundations:	Set posts in holes minimum 300mm square x 800mm deep. Base plated and ground bury options also available. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions and fence height.	
Warranty	Minimum of 15 years against manufacturing defects.	


System Details



Plan of end post

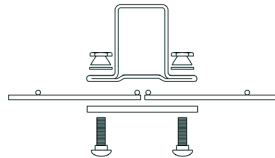

Plan of panels in line

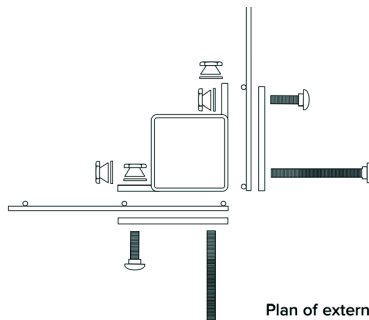

Plan of external corner

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Exact dimensions should be confirmed prior to installation.

Document Reference - 20221111_CLD_Securus_S1_DS

CALL 01270 764751 VISIT WWW.CLD-SYSTEMS.COM