

Technical Specification


Control Point	Head (m)	Flow (l/s)
Primary Design	2.000	13.500
Flush-Flo™	0.586	13.495
Kick-Flo®	1.217	10.665
Mean Flow		11.807

Hydro-Brake® Optimum Flow Control including:

- 5 mm grade 304L stainless steel
- Integral stainless steel pivoting by-pass door allowing clear line of sight through to outlet, c/w stainless steel operating rope
- Beed blasted finish to maximise corrosion resistance
- Stainless steel fixings
- Rubber gasket to seal outlet
- Indicative Weight: 65 kg



hydro-int.com/patents

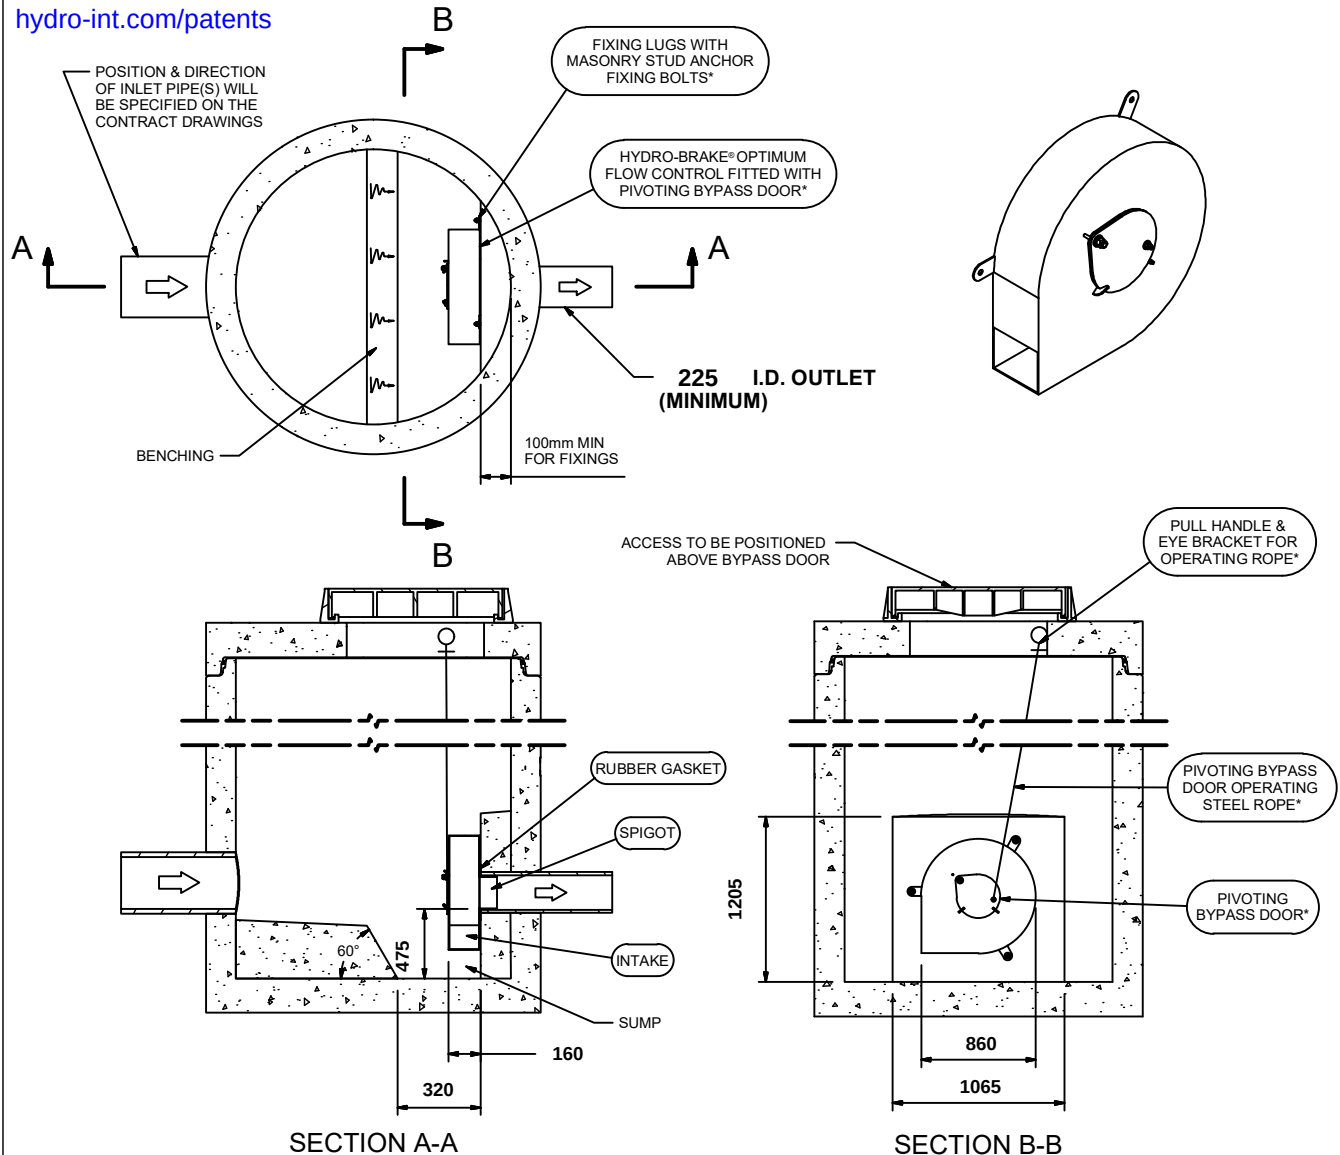

IMPORTANT:

○ LIMIT OF HYDRO INTERNATIONAL SUPPLY

THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
ALL CIVIL AND INSTALLATION WORK BY OTHERS

* WHERE SUPPLIED

HYDRO-BRAKE® FLOW CONTROL & HYDRO-BRAKE® OPTIMUM FLOW CONTROL ARE REGISTERED TRADEMARKS FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

**DESIGN
ADVICE**



The head/flow characteristics of this SHE-0152-1350-2000-1350 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

**Hydro
International**

DATE	14/04/2023 12:56
SITE	Former Happyman PH
DESIGNER	Nasar Mohammed
REF	23-058

SHE-0152-1350-2000-1350
Hydro-Brake® Optimum