

© COPYRIGHT

The copyright in this drawing is vested in Sheppard Robson and no license or assignment of any kind has been, or is, granted to any third party whether by provision of copies or originals or otherwise unless agreed in writing.

DO NOT SCALE FROM THIS DRAWING

The contractor shall check and verify all dimensions on site and report any discrepancies in writing to Sheppard Robson before proceeding with work.

FOR ELECTRONIC DATA ISSUE

Electronic Data / drawings are issued as "read only" and should not be interpreted for measurement. All dimensions and levels should read, only from those values stated in text on the drawing.

NOTES

- Where partitions are to achieve a fire performance (refer to 29 series), ensure that the partition extends above the head of the door / glass screen to concrete slab.

REV. DATE AMENDMENT

P01	26.04.2022	Stage 3 issue
P02	20.06.2022	Draft Issue to British Oxygen
P03	12.08.2022	Issued for Stage 4
P04	22.08.2022	Issued for Stage 4
P05	23.08.2022	Issued for Stage 4
P06	13.01.2022	ENWL room relocated to basement

NOTES

- Please note that there are areas with limited access. Some areas may differ from the survey information. Structural Slab not surveyed, dimensions to be checked on site prior to construction. Proposals subject to detailed site investigation and opening up works.

- All dimensions to be checked on site and any discrepancies to be highlighted prior to construction.

- Pall Mall Court is Grade II Listed. If in doubt about any element of the works, please consult the Architect before proceeding. Any proposed works that deviate from this drawing are to be reviewed by the Architect prior to carrying out these works.

- Special care to be taken when working adjacent to heritage features such as mosaic tiles or brick floors to stair cores, so as not to disturb or damage these features. Ensure adjacent elements are not damaged.

Internal Wall Types Legend

Partition Types

Wall Type 1 - K10-112	Fire performance: 30 minutes fire resistance Acoustic performance 42 dB 15mm SoundBoard 70mm metal stud 15mm SoundBoard
Wall Type 2 - K10-114	Fire performance: 30 minutes fire resistance Acoustic performance 47 dB 15mm SoundBoard 70mm metal stud 25mm SoundBoard 15mm SoundBoard
Wall Type 3 - K10-116	Fire performance: 60 minutes fire resistance Acoustic performance 51 dB 2x15mm SoundBoard 70mm metal stud 2x15mm SoundBoard
Wall Type 4 - K10-118	Fire performance: 60 minutes fire resistance Acoustic performance 55 dB 2x15mm SoundBoard 20mm metal stud 20mm metal stud 2x15mm SoundBoard
Wall Type 5 - K10-120	Fire performance: 60 minutes fire resistance Acoustic performance 57 dB 15mm FireLine 70mm metal stud 15mm FireLine
Wall Type 6 - K10-122	Fire performance: 120 minutes fire resistance Acoustic performance 48 dB 2x15mm FireLine 70mm metal stud 2x15mm FireLine
Existing Wall	

Shaft Wall Types

Shaft Wall Type 1 - K10-130	Fire performance: 120 minutes fire resistance Acoustic performance 45 dB 3x15mm FireLine 60mm metal stud 25mm insulator 15mm corridor
Shaft Wall Type 2 - K10-132	Fire performance: 60 minutes fire resistance Acoustic performance 49 dB 2x12.5mm FireLine 60mm metal stud 19mm corridor

Wall Liner Types

Wall Lining Type 1 - K10-146	12.5mm SoundBoard Gyproc G1 Lining Channel
TileBacker Board to Lobbies	12.5mm TileBacker
PlasterBoard to Lobbies	12.5mm PlasterBoard

Independent Liner Types

Independent Wall Lining Type 1 - K10-148	2x15mm WallBoard 60mm metal stud
--	-------------------------------------


Glazed Partition Types

Glazed Partition Type 1A	Acoustic performance 40 dB Rw Double Glazed Partition System
Glazed Partition Type 1B	Acoustic performance 38 dB Rw Single Glazed Partition System
Glazed Partition Type 2A	Acoustic performance 40 dB Rw Single Glazed Partition System
Glazed Partition Type 2B	Acoustic performance 49 dB Rw Double Glazed Partition System
Glazed Partition Type 3A	Acoustic performance 49 dB Rw Double Glazed Partition System
Glazed Partition Type 3B	Acoustic performance 49 dB Rw Double Glazed Partition System
Glazed Partition Type 4	Fire performance: 120 minutes fire resistance Acoustic performance 47 dB Rw Single Glazed Partition System
Glazed Partition Type 5	Fire performance: 120 minutes fire resistance Acoustic performance 47 dB Rw Double Glazed Partition System

Refer to 32 series for glazed screen details and S/O.
Refer to 22670 & 22707 for louvre & glazed screen arrangement



KEYPLAN

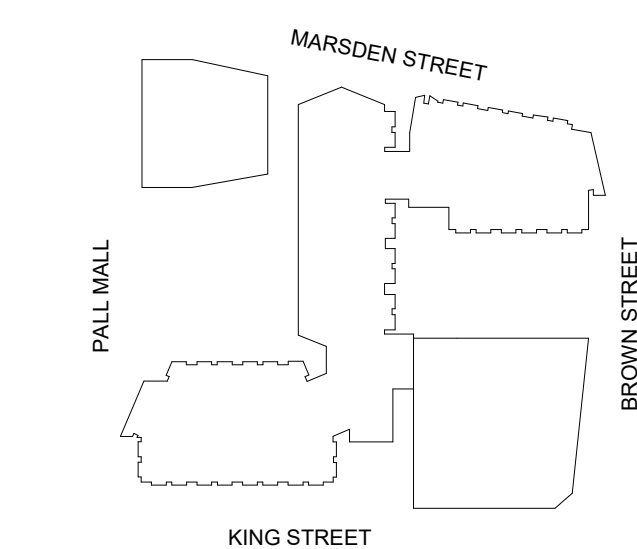

CLIENT

Bruntwood Works

bruntwood
Works

ID:SR
SHEPPARD ROBSON

27th Floor City Tower Piccadilly Plaza Manchester M1 4BT
T: +44 (0)161 233 8900 E: enquiries@sheppardrobson.com

PROJECT

Pall Mall Court

SCALE	DATE	ORIGINATOR	CHECKED	AUTHORISED
1:100	13.01.2022	SD	ASM	TOB

Internal Wall Types
Basement Plan

STATUS PURPOSE FOR ISSUE

S3 For Review and Comment

DRAWING NO.

6911 - SRA - ZZ - B1 - DR - A - 22098

SR NO.

6911

REV.

P06

0 1 2 3 4 5 10 m