


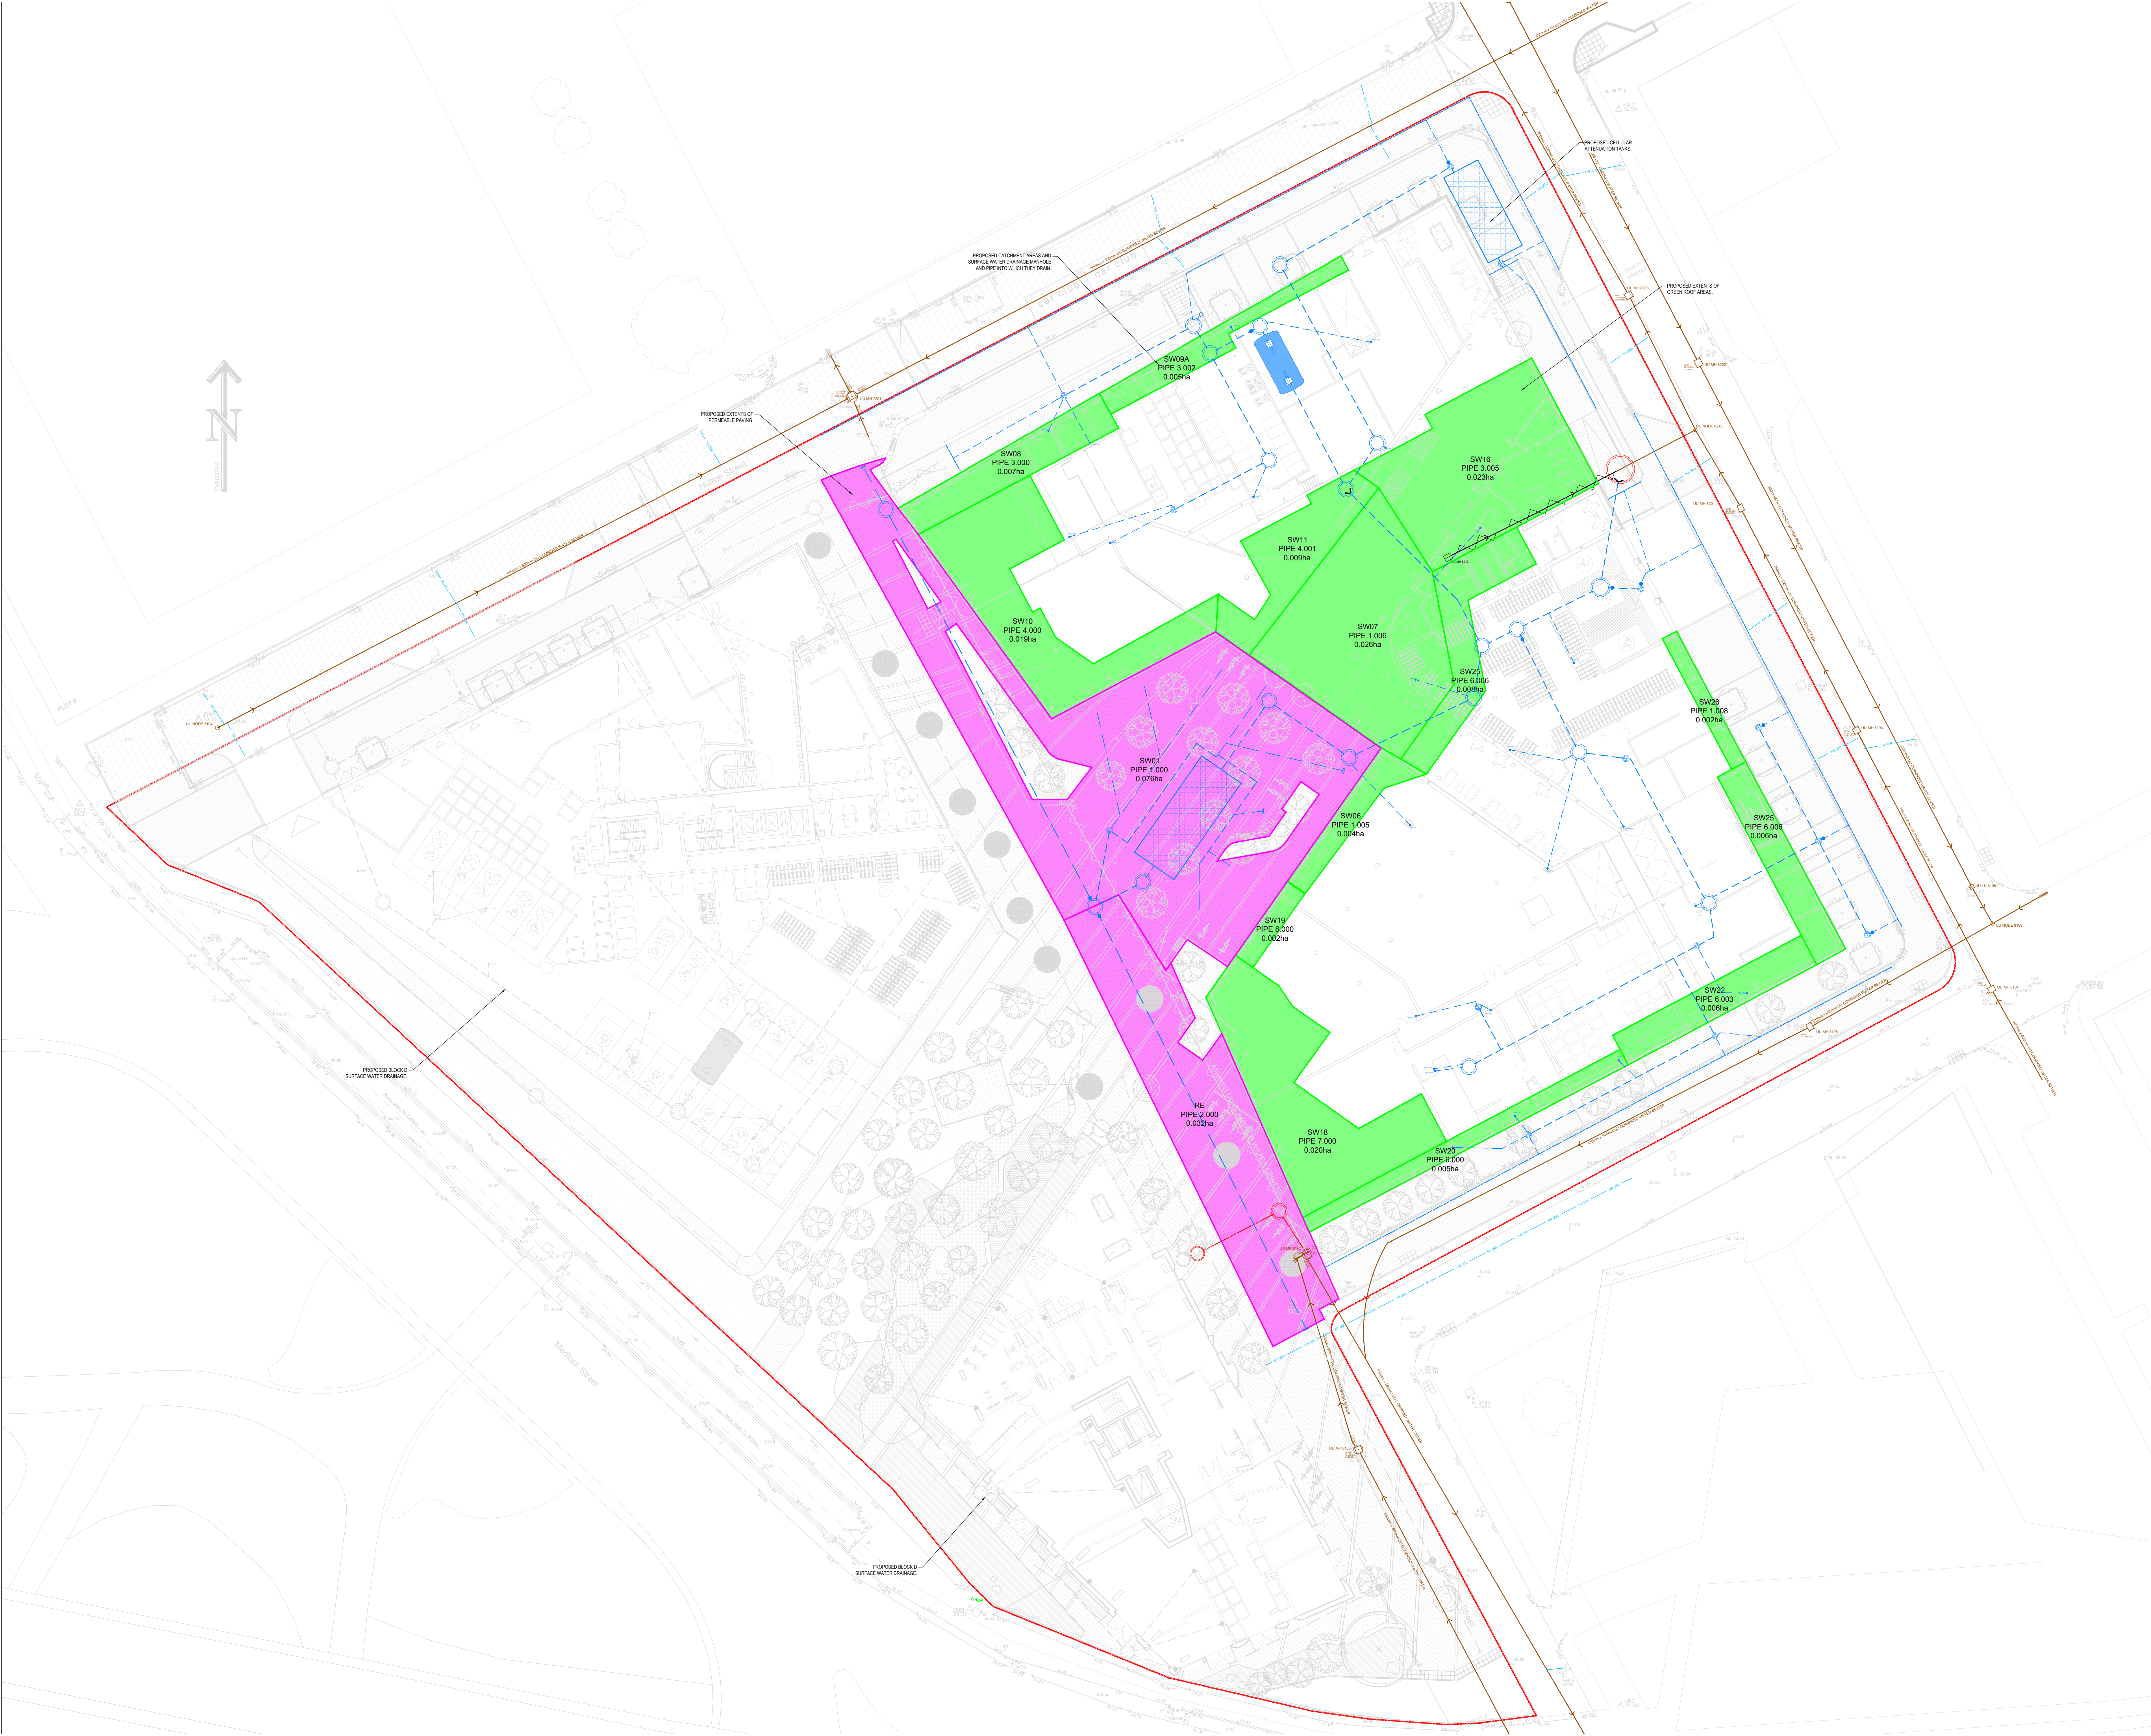

- IMPORTANT NOTES**
- SETTING OUT SHALL BE UNDERTAKEN USING ONLY THE INFORMATION GIVEN. DISTANCES SHOULD NOT BE SCALED FROM THIS DRAWING.
 - ALL SEWERS SHALL BE CONSTRUCTED IN ACCORDANCE WITH SEWERS FOR ADOPTION 7TH EDITION AND UNITED UTILITIES DETAILS & GUIDELINES.
 - THE MINIMUM GRAVITY PIPE DIAMETER UNDER ADOPTABLE HIGHWAYS SHALL BE 150mm.
 - IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY ALL INFORMATION GIVEN WITH REGARD TO EXISTING SERVICES AND DRAINAGE CONNECTIONS ETC. PRIOR TO COMMENCING THE WORKS. THE RATES SHALL INCLUDE FOR HANDING AROUND SERVICES WHERE NECESSARY. THE CONTRACTOR SHALL ADHERE TO THE CDM REGULATIONS AT ALL TIMES.
 - THE OUTSIDES OF ALL SEWERS SHALL BE A MINIMUM OF 1.0m FROM KERB LINES AND THE OUTSIDE OF MANHOLES SHALL BE A MINIMUM OF 0.5m FROM KERB LINES.
 - EXISTING FLOWS IN WATERCOURSES, SEWERS AND LAND DRAINS SHALL BE MAINTAINED AT ALL TIMES.
 - ONLY TRAINED PERSONNEL SHALL BE PERMITTED TO ENTER CONFINED SPACES.
 - ALL MATERIALS TO BEAR THE RELEVANT B.S. KITE-MARK AND COMPLY FULLY WITH THE SPECIFICATIONS. ALL CONCRETE & CONCRETE PRODUCTS MUST USE SULPHATE RESISTANT CEMENT UNLESS THE SITE INVESTIGATION REPORT PROVES THAT SULPHATE ATTACK FROM SOILS AND GROUNDWATER WILL NOT OCCUR TO WITHSTAND A CLASS.
 - ALL OPENING NOTICES ETC. AS REQUIRED UNDER HIGHWAYS ACTS ETC. ARE TO BE OBTAINED PRIOR TO COMMENCEMENT OF WORKS. ALL WORKS ARE TO BE INSPECTED BY L.A. ENGINEER OR THE NETWORK OPERATOR AS APPLICABLE.
 - WHERE ULTRA RIB UPVC PIPES (OR SIMILAR APPROVED) ARE USED IN ADOPTABLE DRAINAGE THEY SHALL STILL BE HANDLED AND LAD IN ACCORDANCE WITH THE SPECIFICATION AND GUIDANCE ISSUED BY THE HIGH PERFORMANCE PIPE ASSOCIATION.
 - A CLASS 5 BED AND SURROUND MUST BE USED FOR SUCH PIPES. TRENCH BACKFILL IN HIGHWAYS TO WITHIN 1M OF HIGHWAY SHALL AS DIRECTED BY THE HIGHWAY AUTHORITY BE A SUITABLE GRANULAR MATERIAL ALL IN ACCORDANCE WITH SEWERS FOR ADOPTION CL. 4.3.4.
 - SUB LEVELS SHALL NOT BE VARIED WITHOUT REFERENCE TO THE ENGINEER FOR GUIDANCE.
 - ALL GULLY CONNECTIONS TO BE 150mm VITRIFIED CLAY UNLESS NOTED OTHERWISE.
 - ALL MANHOLE COVERS TO BE RECESSED TO ACCEPT FINISH AS DETAILED BY LANDSCAPE ARCHITECT.
 - SLOW REST BEDS TO BE USED IN ALL LOCATIONS MADE UP FROM 2m x 40 DES BEDS (80mm TO INVERT FROM FFL).
 - MANHOLE POSITIONS AND ACCESS COVERS TO BE ACCURATELY SET-OUT BY LANDSCAPE ARCHITECT TO SUIT EXTERNAL FINISHES.
 - ALL DRAINS CAST THROUGH FOUNDATIONS TO HAVE ROCKER PIPES ON BOTH SIDES OF FOUNDATION.
 - ALL POP UP POSITIONS TO BE CONFIRMED SET OUT DIMENSIONS TO BE AGREED & PROVIDED BY OTHERS.
 - ALL DISCHARGE RATES TO BE CONFIRMED BY M&E DESIGNER.
 - ALL SURFACE WATER COLLECTION FEATURES TO BE CONFIRMED BY THE LANDSCAPE ARCHITECT.
 - STORAGE HAS BEEN PROVIDED IN A CELLULAR STORAGE TANK AND UP-SIZE MANHOLES AND PIPES.
 - EXISTING SEWER DEPTHS HAVE BEEN APPROXIMATED FROM LIMITED INFORMATION, NEW CONNECTIONS TO BE CONFIRMED PRIOR TO CONSTRUCTION OF ANY DRAINAGE WORKS.
 - LANDSCAPE ARCHITECT TO CONFIRM GULLY AND DRAINAGE CHANNEL LOCATIONS TO LANDSCAPED AREAS.
 - FOUL NETWORK TO BE CONFIRMED FOLLOWING CONFIRMATION OF BRANCH CONNECTION POINTS FROM BUILDING M&E DESIGNER.
 - CCTV SURVEY OF EXISTING SITE DRAINAGE REQUIRED PRIOR TO THE COMMENCEMENT OF ANY WORKS STARTING ON SITE.

- LEGEND**
- PROPOSED SURFACE WATER MANHOLE
 - PROPOSED COMBINED WATER MANHOLE
 - PROPOSED SURFACE WATER PIPING
 - PROPOSED SURFACE WATER DRAINAGE
 - PROPOSED COMBINED WATER DRAINAGE
 - PROPOSED PERFORATED UNDERDRAIN FOR NON-INFILTRATION PERMEABLE PAVING WITH ROOFING EYE
 - PROPOSED ACC DRAIN
 - PROPOSED GULLY
 - PROPOSED CELLULAR ATTENUATION TANK
 - AREAS OF NON-INFILTRATION (TANKED) PERMEABLE PAVING
 - AREAS OF GREEN ROOFS
 - EXISTING UNITED UTILITIES COMBINED WATER SEWER
 - EXISTING UNITED UTILITIES COMBINED WATER SEWERS TO BE ABANDONED
 - EXISTING UNITED UTILITIES COMBINED WATER SEWERS ALREADY ABANDONED

CD	18.03.2024	FINAL ISSUE - CONSTRUCTION INTENT - COURTYARD DRAINAGE UPDATED TO SUIT	JRS	JRS	DJS
CD	01.08.2024	FINAL ISSUE - CONSTRUCTION INTENT	JRS	JRS	DJS
REV	DATE	DESCRIPTION	BY	CHK	APP

DRAWING STATUS

CONSTRUCTION INTENT

CLIENT: DOWNING

ARCHITECT: SIMPSON HAUGH & PARTNERS

PROJECT: FIRST STREET SOUTH MANCHESTER

TITLE: BLOCKS A & B SUDS ELEMENTS LAYOUT

STATUS	PROJECT No.	PROJECT	ORIGINATOR	VOL	LEVEL	TYPE	ROLE	DRAWING No.	REV
S2	219-215	FSS - AJP - XX - 00 - DR - C - 0120	C02						

SCALE: B.A. 1:200

DESIGNED	DRAWN	CHECKED	APPROVED	DATE
JRS	JRS	DJS	DJS	AUG 2024

AJP consulting engineers
0151 227 1462 | 81info@ajpjd.co.uk | 81 Dale Street, Liverpool, L2 2ET