


ROTOP™

RIGID PANEL SYSTEM

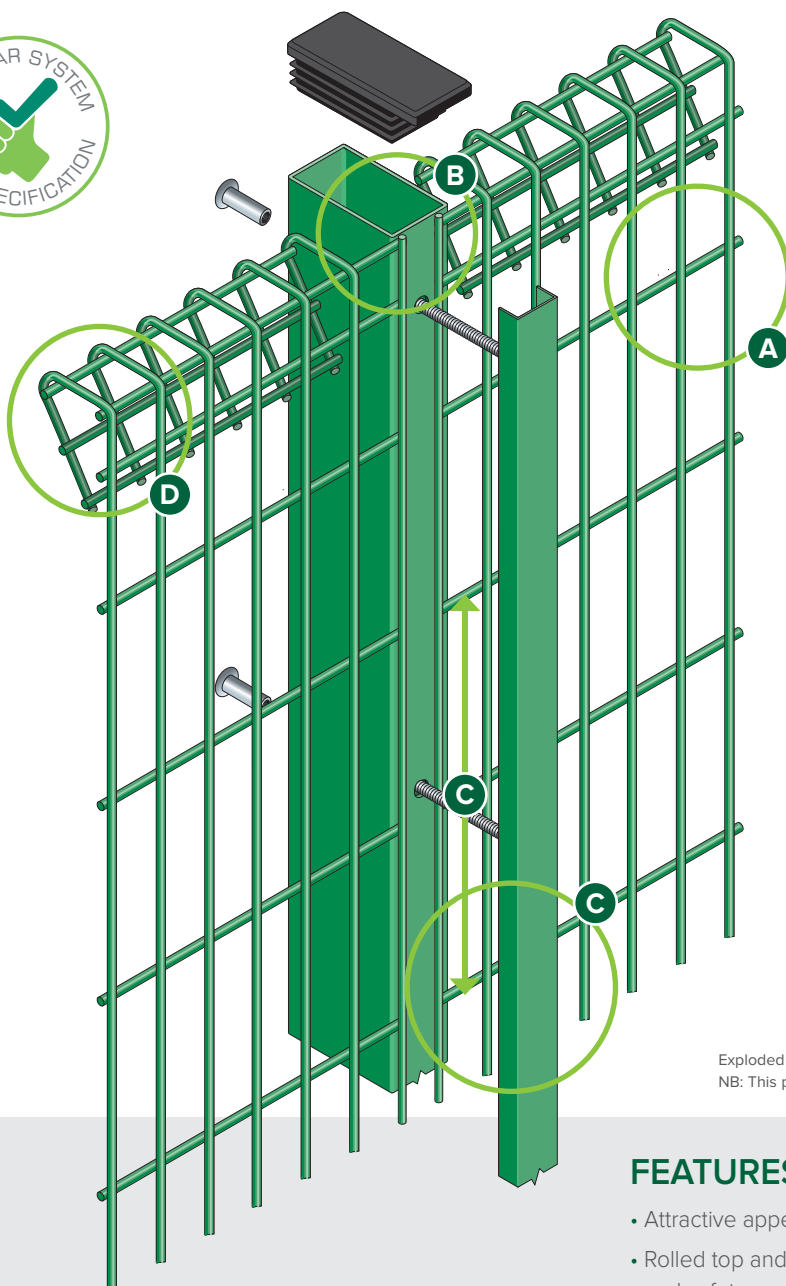

CLD
Fencing
Systems

A

Fully resistant welded joints

B

Galvanised and polyester
powder coated RHS post

C


Full length clamp bar for secure
fixing and infinitely variable panel
stepping within post length

D

Rolled Top and Base

Conforms to **BS1722: Part 14**

SafeTfix™



SafeTfix fixing
system for added
safety & security.

n55Plus

Exploded view of post and clamp for Rotop panel system
NB: This product has additional features not demonstrated for security reasons

FEATURES


- Attractive appearance
- Rolled top and bottom beam for rigidity and safety
- Wide range of height options
- RAL colours available

SUITABLE FOR


- Public buildings
- Schools
- Car parks
- Business parks and retail premises
- Sports stadiums

SYSTEM DETAILS


Drawings are for illustrative purpose only



Plan of end

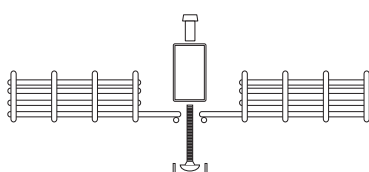


Plan of panels in line

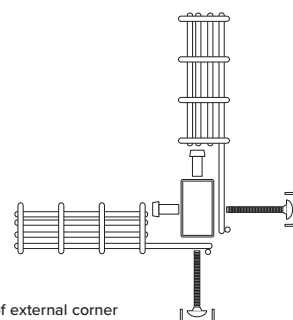

Plan of external corner

CALL 01270 764751 OR VISIT WWW.CLD-FENCING.COM

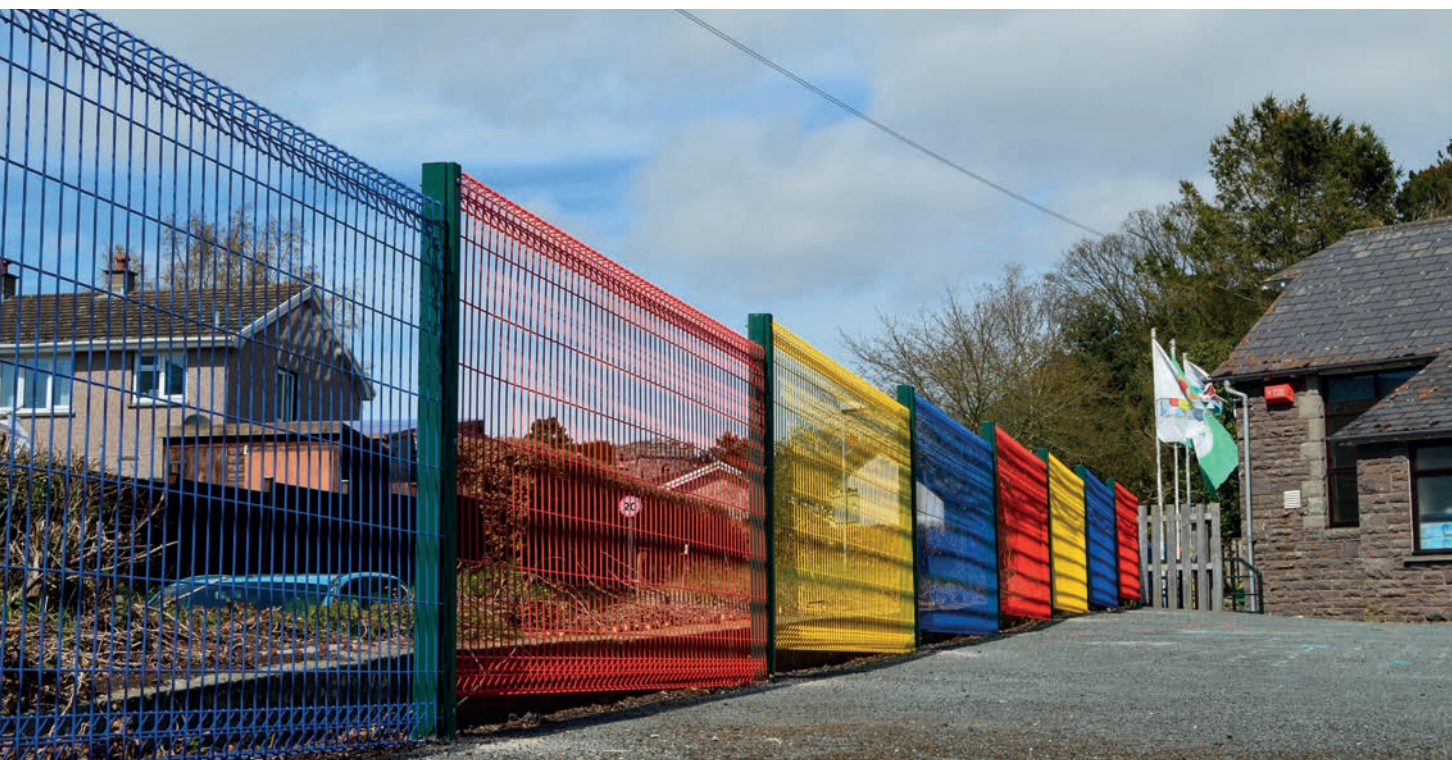

DESCRIPTION

There are times when fencing needs to be as practical and hard wearing as it is attractive, and the Rotop™ rigid panel system is exactly that. The welded steel mesh panels with rolled top and bottom beams, acts as an ideal perimeter while providing essential rigidity and safety. For projects that require a taller fence, we can offer a double lift system that provides a “middle roll” for enhanced aesthetics.

Perfect in places such as nurseries, primary schools and sports facilities, Rotop™ will keep its shape and remain strong despite the daily impacts of people and sporting equipment. Alternative uses include car parks, business parks and retail premises.

Each fencing panel is fitted to 60 x 40mm RHS steel posts using a full length clamp bar, while SafeTfix™ hidden security fixing allows for easy stepping when faced with a gradient. With many height options and RAL colours to choose from, it's a great all-round fencing solution.

Rotop™ also conforms to BS 1722-14 for open mesh steel panel fences, plus you get the added peace of mind of our standard 15 year guarantee against manufacturing defects.

FINISH

Galvanised and polyester powder-coated after stringent cleaning and treatment, to give a well adhered coating of a minimum of 60 microns. The full RAL range of colours are available.

PANEL DIMENSIONS

Heights	900, 1200, 1500, 1800mm (other heights available as double lift)
Panel width	3000mm
Mesh size	150 x 50mm
Wire diameter	5mm
Top edge projection	Nil wire is flush on all edges

All dimensions are nominal

ROTOP POSTS AND CLAMPS

The RHS posts are supplied complete with a full-length clamping channel, fixed with cup square M8 bolts and SafeTfix™ nuts or permacone nuts.


SLOPING GROUND

Panels can be stepped as required. Where gradients exceed 1:16, it is recommended that taller panels are either part-buried or additional posts are used.

VARIATIONS

In addition to the standard posts many variations are available to accommodate site requirements:

- Alternative sections
- Wall fixing plates, cranked posts or base plated

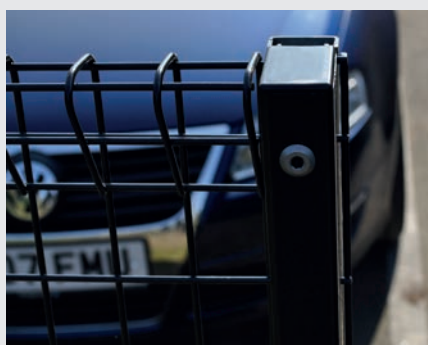

DIMENSIONS

Posts	60 x 40mm RHS
Clamping channels	41 x 21mm
Post centres	3010mm

