

REVISIONS			
REV.	DESCRIPTION	DATE	DRAWN BY
A	FIRST ISSUE	29/JUL/2011	M.S.BREWIN

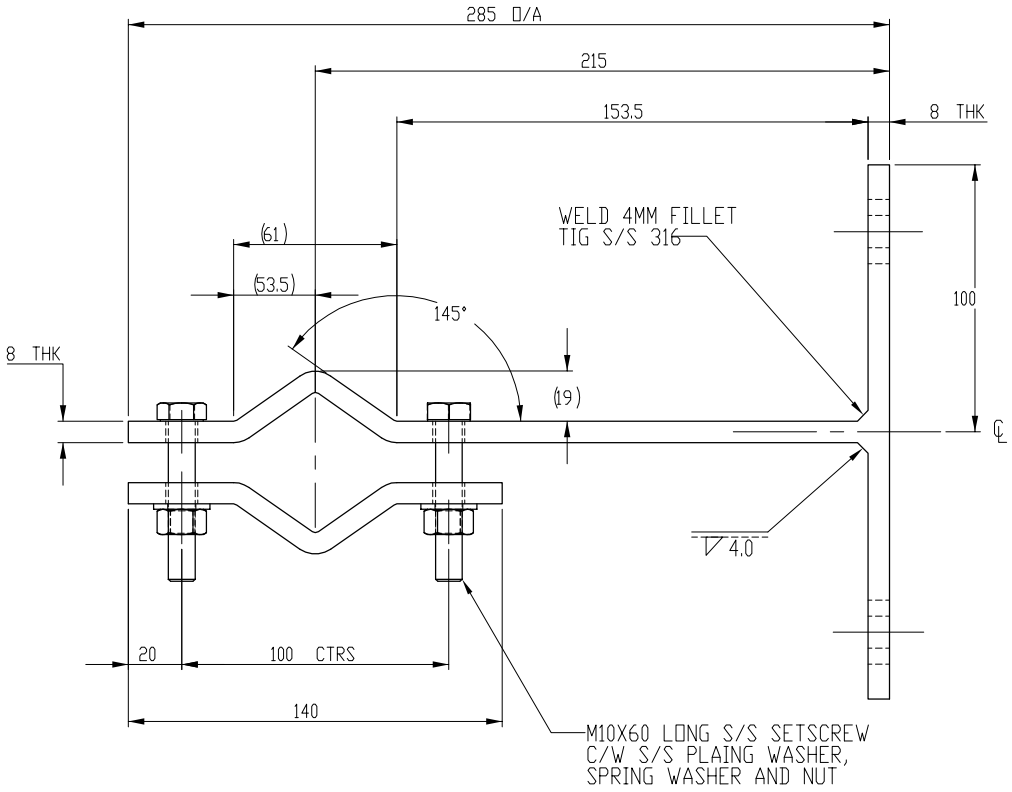

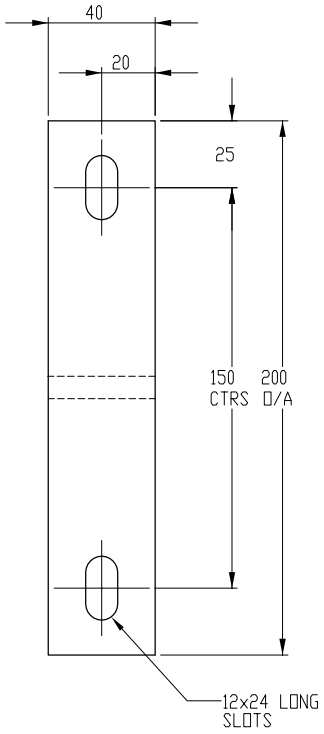


NOTES:-


1. BRACKET SHOWN WITHOUT MAST INSERTED.
2. BRACKET SUITABLE FOR STANDARD Ø48.3 OD AND Ø42.16 OD MASTS.
3. FIXINGS IN GR308 STAINLESS STEEL.

2-OFF BRACKETS REQUIRED TO SUIT STANDARD MASTS UP TO 4M TOTAL LENGTH.

3-OFF BRACKETS REQUIRED TO SUIT STANDARD MASTS OVER 4M TOTAL LENGTH.

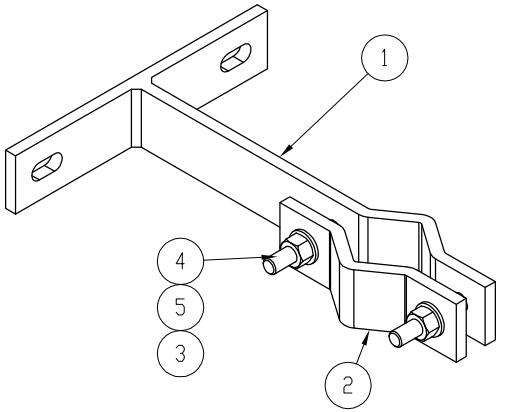

ISOVIEW

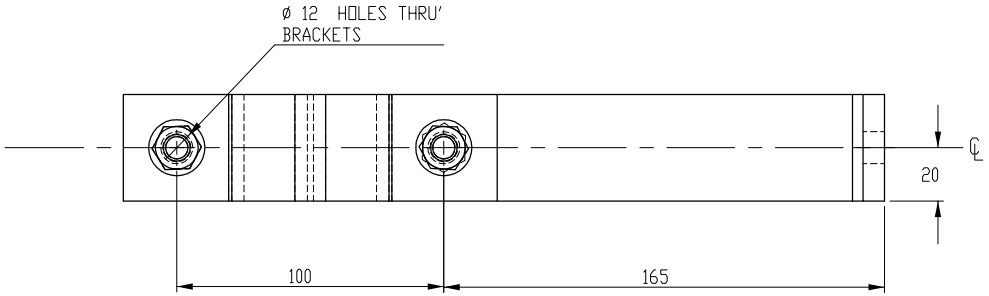

ITEM NO.	PartNo	DESCRIPTION	QTY.
1	ESEBRKT-215-SS01	215mm OFFSET MAST BRACKET/01	1
2	ESEBRKT-215-SS02	215mm OFFSET MAST BRACKET/02	1
3			2
4			2
5		Hex S/S Nut	2

© PROTECTIS LTD
12A Hazel Street,
Bulwell,
Nottingham.
United Kingdom.
NG6 8EA

TEL +44 (0)115 975 8822
FAX +44 (0)115 975 8821

info@protectis.co.uk
www.protectis.co.uk

©THIS DRAWING AND THE COPYRIGHT, IS THE PROPERTY OF PROTECTIS LTD. IT MAY NOT BE COPIED, REPRODUCED, PUBLISHED OR DISCLOSED IN WHOLE OR IN PART WITHOUT OUR WRITTEN CONSENT.

Protectis

FINISH (See Notes)
DEBUR AND BREAK SHARP EDGES WHERE APPLICABLE

	NAME	SIGNATURE	DATE
DRAWN	M.S.BREWIN		02/AUG/2011
CHK'D			
APPV'D			

DIMENSIONS ARE IN mm
TOLERANCES:-
LINEAR: +/-.01mm
ANGULAR: 0.1 deg

ORIENTATION: 3RD ANGLE

MATERIAL: GR 304 S/S

TITLE: STANDARD 215mm OFFSET MAST BRACKET ASSY

DWG NO. ESEBRKT-215SS-A | A3

WEIGHT: 1.60kg | SCALE:1:2 | SHEET 1 OF 1