

Standing seam clamps

A wide range of fasteners
for standing seam roofs


- Direct fastening
- Can be fastened quickly
- Validated system structural analysis




Schletter **standing seam clamps** are an ideal fastening solution for almost any standing seam metal roof. With the KlickTop design, the system can be fastened conveniently from above. Alternatively, FixPlan can be used to fasten the system directly to the substructure.

Abbreviations

AL = Aluminium clamp
VA = High-grade steel clamp
KK = Klick channel e.g. for KlickTop cross connector
KT = with KlickTop connector
Rapid = for Rapid module clamps
¹ = no general technical approval



KK



KK


112001-000 Seam clamp 503 VA for standing seam roof¹

Please note: With titanium sheeting, please verify that the standing seams have a sufficient load-bearing capacity!

112001-001 Seam clamp 503 AL KK for standing seam roof


112001-010 Seam clamp 504 AL KK for standing seam roof

especially suitable for double lock standing seam roofs made of titanium zinc sheet metal




Possible dimensions of the seam (see dimension drawing on the left)
 $h = 11 - 13 \text{ mm}$, $w1 = 4 - 6 \text{ mm}$, $w2 = \text{max. } 3 \text{ mm}$

The standing seam clamp 504 was developed in cooperation with the company Rheinzink for double lock standing seam roofs made of titanium zinc sheet metal and has been confirmed by Rheinzink as a good solution. Profiles (rails) that are fastened to standing seams must not exceed a length of about 3 meters without thermal separation.



KK



KK

112002-000 Seam clamp 510 AL for KalZip and similar designs

for KalZip, Bemo, Monteco Eurorib E500 and similar design

112002-002 Seam clamp 510 AL KK for KalZip and similar designs

112003-000 Seam clamp 520 AL for Zambelli RibRoof465


for Zambelli RibRoof, design 465 and similar designs

112003-001 Seam clamp 520 VA for Zambelli RibRoof465¹

112003-002 Seam clamp 520 AL KK for Zambelli RibRoof465

Abbreviations

AL = Aluminium clamp
 VA = High-grade steel clamp
 KK = Klick channel e.g. for KlickTop cross connector
 KT = with KlickTop connector
 Rapid = for Rapid module clamps
¹ = no general technical approval




KK

112004-000 Seam clamp 522 AL for Zambelli RibRoof500
 for Zambelli RibRoof, width 500 and similar designs

112004-001 Seam clamp 522 AL KK for Zambelli RibRoof500


112005-000 Seam clamp 522 VA for Zambelli RibRoof500¹




KK

112006-000 Seam clamp 524 AL for Fischer KlipTec52-400
 for Fischer KlipTec 52/400
 and similar designs


112006-001 Seam clamp 524 AL KK for Fischer KlipTec52-400




112007-000 Seam clamp 525 VA for Domico Domitec
 for Domico and similar designs




112010-000 Seam clamp 530 VA¹ KT for Riverclack
 for Riverclack and similar designs



112010-002 Seam clamp 530 VA¹ Rapid for Riverclack
 for Riverclack and similar designs




112012-000 Seam clamp 540 AL KT for KlipLok 700 HiStrength¹
 for KlipLok 700 HiStrength and similar designs



112012-001 Seam clamp 540 AL KT for KlipLok 700 Classic / 406¹
 for KlipLok Classic 700, KlipLok 406 and similar
 designs

Abbreviations

AL = Aluminium clamp
 VA = High-grade steel clamp
 KK = Klick channel e.g. for KlickTop cross connector
 KT = with KlickTop connector
 Rapid = for Rapid module clamps
¹ = no general technical approval

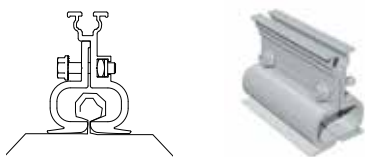

112014-000 Seam clamp 550 AL KK Universal¹

for seams of max. 47 mm width and 25 mm height

Accessories




129004-000 KlickTop-cross connector kit M8

with screws, Klick insert and square nut for Klick channel M8 for fastening profiles (rails) onto standing seam clamps for KlickTop

129063-000 Rapid cross connector


Completely pre-assembled for Klick channel M8 for cross rail system



General mounting information

❶ The clamp is placed on the seam and is loosely tightened. Components are aligned as the cross beams are fastened. In each case the clamp must be form-locked onto the seam!

❷ Tighten the clamp. Please limit the tightening torque to avoid deformation of the standing seams and to ensure that thermal expansion of the metal sheets is not impeded!



Special case Seam clamp 504 AL KK for standing seams

❶ Attach the clamp onto the standing seam from above. Make sure that the hook of the clamp is always on the folded side.

❸ Fasten the grub screw with a tightening torque of 15 Nm using a torque wrench with a size 4 wrench socket.

❷ Press the clamp downwards so that the clamp hooks in into the flange. Then release the clamp so that it springs back upwards.

Technical data

Material	Fastening components: Aluminium, high-grade steel 1.4301; Screws: High-grade steel
Structural analysis	Structural analysis based on generally accepted rules and standards of technology. Structural safety certification for the mounting system is carried out based on Eurocodes and in conjunction with general technical approvals. Load assumptions are made in accordance with DIN EN 1991-1 and the regulations outlined in the country-specific annex. Verification of roof covering and of the building itself is not included in this documentation. Guidelines and recommendations from the documented verification are to be taken into account.
Calculation and ordering	Calculation and/or ordering can be effected using our auto-calculator software, for example.

Further information at: www.schletter.eu.

*in accordance with our General Terms and Conditions of Sale and Supply (www.schletter.de/AGB_en); Subject to changes and/or to technical modifications.

© Schletter GmbH • Gewerbegebiet an der B15 • Alustraße 1 • 83527 Kirchdorf/Haag i. OB • Germany • Tel.: +49 8072 9191-200
 Fax: +49 8072 9191-9200 • E-mail: solar@schletter.eu • www.schletter.eu • Updated 01/2015 • Subject to change without notice
 Your contact in the UK: Schletter UK Limited, Tel.: +44 1296 461 800, Fax: +44 1296 461 801, E-mail: info@schletter.co.uk