

Leo CCT LED Polycarbonate Bollard

Supplied c/w Integral Driver




- Modern styled bollard with polycarbonate construction
- White reflector with clear polycarbonate diffuser
- Polycarbonate construction is ideal for coastal applications
- Suitable for domestic and commercial applications
- Supplied c/w root mounting kit, can be surface mounted with rawbolts
- CCT selectable between 3000K and 4000K
- LED lifespan L70 61,000 hours
- Non-dimmable



ALEOLED/CCT/045/GR

ALEOLED/CCT/075/GR

ALEOLED/CCT/100/GR

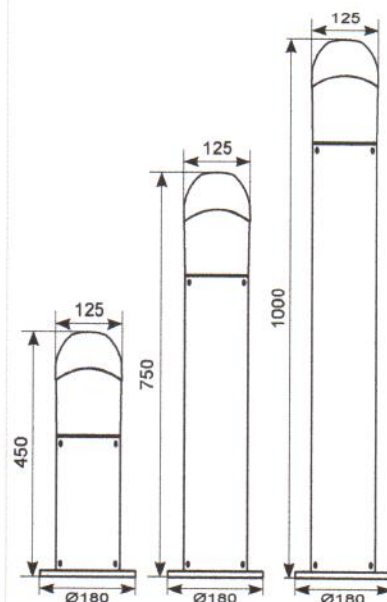

LED Information

Total (Watts)	5W	10W	10W
Lumens Delivered	4000K	3000K	
5W	420lm	470lm	
10W	800lm	850lm	
10W	800lm	850lm	
Lm/W			
5W	84lm	94lm	
10W	80lm	85lm	
10W	80lm	85lm	
CRI	Ra 65		
CCT	3000K		
	4000K		
Input	230V		
Hertz	50/60Hz		
Operating Temp	-20°C to 50°C		

Code	Lamp	Description
ALEOLED/CCT/045/GR	LED	5W - Warm White/Cool White
ALEOLED/CCT/075/GR	LED	10W - Warm White/Cool White
ALEOLED/CCT/100/GR	LED	10W - Warm White/Cool White

