


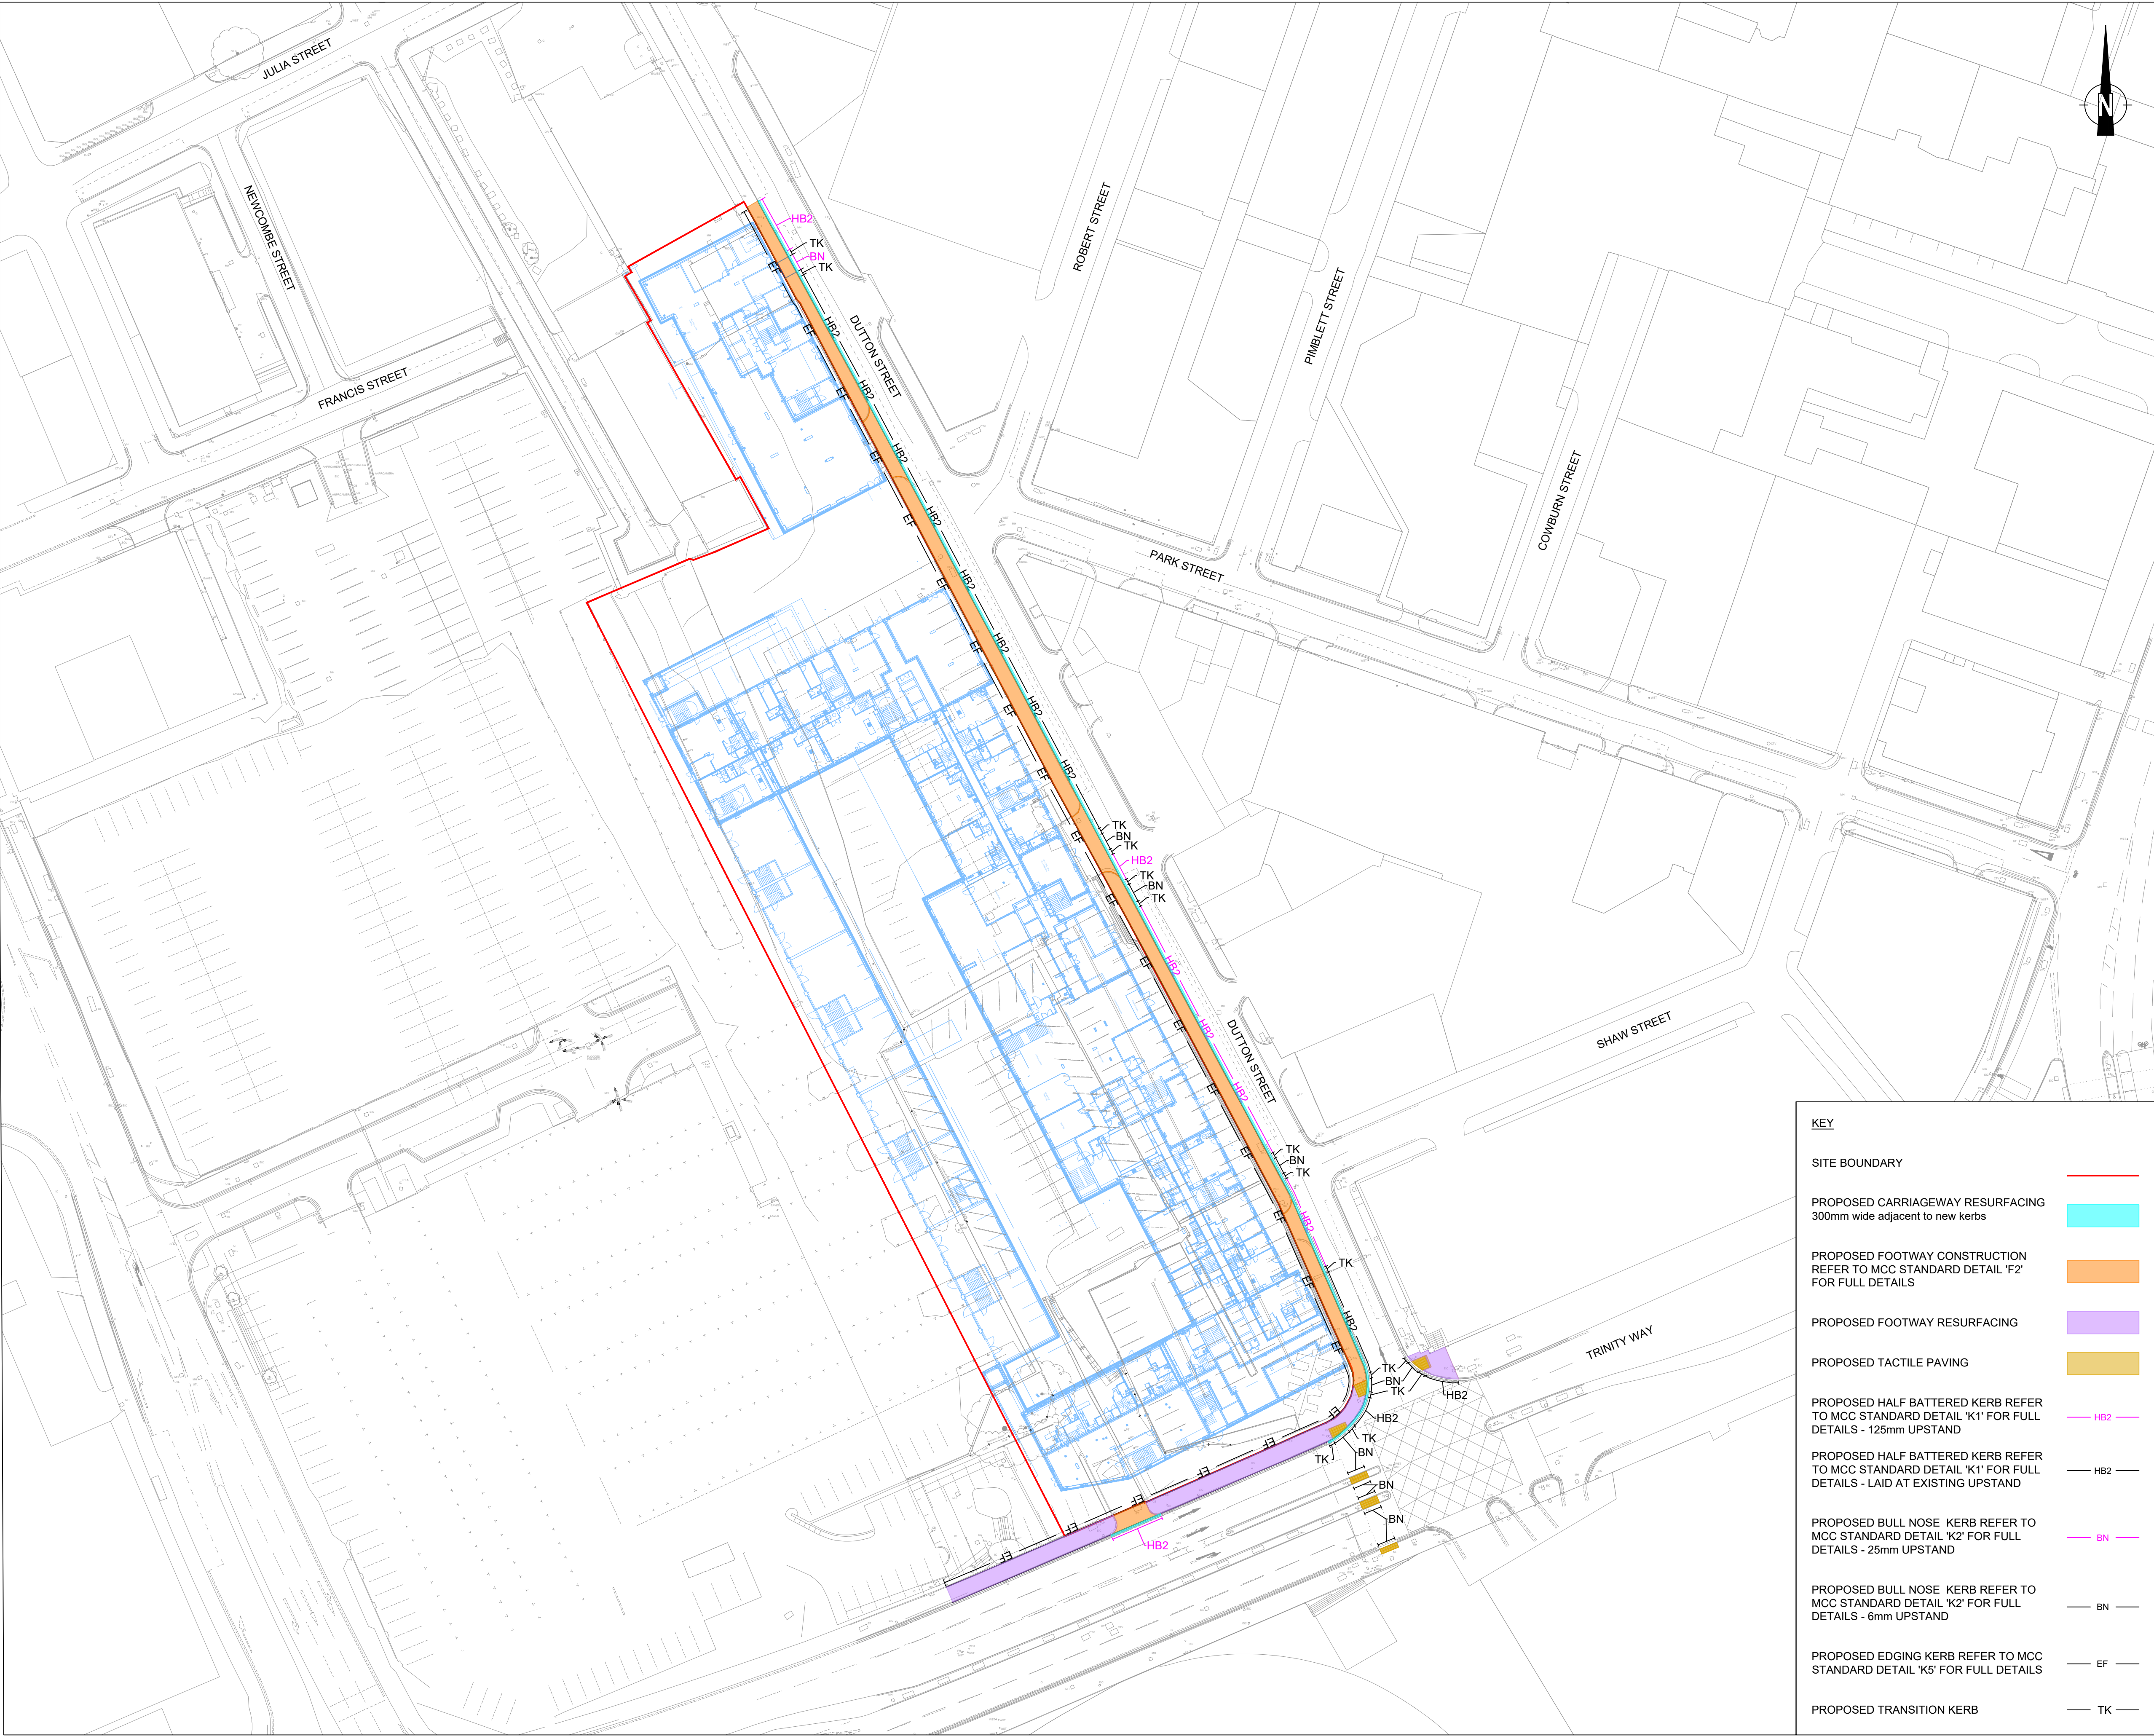

- NOTES:
- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL DRAWINGS WITHIN APPENDIX 0/4, THE MANUAL OF CONTRACT DOCUMENTS FOR HIGHWAY WORKS (SHW) AND THE CONTRACT SPECIFICATION.
 - HIGHWAY WORKS WHERE INDICATED BEYOND THE PROPOSED ADOPTION BOUNDARY ARE TO BE CONSTRUCTED AS PART OF THIS CONTRACT BUT TO REMAIN PRIVATE.
 - FOR APPLICABLE SECTOR SCHEMES FOR WORKMANSHIP AND MATERIALS WITH ASSOCIATED APPENDICES; REFER TO APP 1/24 QUALITY MANAGEMENT SYSTEM PART E.
 - IN ACCORDANCE WITH THE CDM REGULATIONS RESIDUAL RISKS OF SIGNIFICANCE ARE INDICATED ON THE DRAWING ONLY BY MEANS OF A HAZARD TRIANGLE WITH APPROPRIATE NOTE.
 - THE CONTRACTOR SHALL CONDUCT THE WORKS WITH DUE REGARD TO THE ECOLOGICAL AND ENVIRONMENTAL REQUIREMENTS OF THE SCHEME.
 - THE CONTRACTOR SHALL TAKE SUCH STEPS TO SAFEGUARD AGAINST CONTAMINATION OF LOCAL WATERCOURSES.
 - TEMPORARY WORKS DESIGN ASSOCIATED WITH THE CONSTRUCTION OF THE WORKS SHALL BE RESPONSIBILITY OF THE CONTRACTOR.
 - BITUMINOUS MATERIALS SHALL CONFORM TO BS EN 13108 AND SHALL BE SAMPLED AND TESTED IN ACCORDANCE WITH BRITISH STANDARDS. AND THE RESULTS MADE AVAILABLE FOR INSPECTION BY THE ENGINEER.
 - PRECAST CONCRETE KERBS AND EDGINGS ARE TO COMPLY WITH BS EN 1340 AND SHW CLAUSE 1101.
 - TOPOGRAPHICAL SURVEY BY SURVEY OPERATIONS, REF. 23H159/001, DATED SEPTEMBER 2023.
 - TOPOGRAPHICAL SURVEY AND OS DATA SUPPLIED BY CLIENT. ALL DIMENSIONS, LEVELS AND SURVEY GRID COORDINATES ARE TO BE CHECKED BY THE CONTRACTOR AND ANY DISCREPANCIES ON THIS DRAWING OR ON SITE MUST BE REPORTED TO THE PROJECT MANAGER IMMEDIATELY.
 - ALL LEVELS ARE GIVEN IN RELATION TO ABOVE ORDNANCE DATUM (AOB) UNLESS STATED OTHERWISE.
 - EXISTING BACK OF FOOTWAY LEVEL TO BE RETAINED.
 - REFER TO SLR DRAWING 000382-SLR-XXX-XXX-DR-CH-4000 FOR CONSTRUCTION DETAILS.

**SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION**

PLEASE REFER TO THE HEALTH AND SAFETY FILE FOR A FULL LIST OF THE HAZARDS ASSOCIATED WITH THIS WORK - THE FOLLOWING ARE THE MOST SIGNIFICANT ITEMS TO BE AWARE OF.

CONSTRUCTION

- OPERATIVES TO TAKE PRECAUTIONS WHEN WORKING ADJACENT TO OR WITHIN DEEP EXCAVATIONS. METHOD STATEMENT TO BE PRODUCED BY CONTRACTOR PRIOR TO WORKS COMMENCING.
- ATTENTION IS DRAWN TO THE EXISTENCE OF BOTH EXISTING UNDERGROUND AND OVERHEAD UTILITIES.

ENVIRONMENTAL

- EXISTING WATERCOURSES IN CLOSE PROXIMITY TO WORKS. A POLLUTION PREVENTION STRATEGY AND WORKING METHOD STATEMENTS TO BE PRODUCED BY THE CONTRACTOR FOR ALL WORKS.
- CONSIDERATION GIVEN TO NOISE LEVELS GIVEN PROXIMITY TO EXISTING PROPERTIES.
- CONSIDERATION GIVEN TO GROUND CONDITIONS. CONTRACTOR TO REVIEW GEOTECHNICAL REPORT PRIOR TO UNDERTAKEN EXCAVATION WORKS.

WORK CAN ONLY BE CARRIED OUT BY SUITABLY TRAINED AND BRIEFED PERSONNEL

AWAITING TECHNICAL APPROVAL

This drawing has NOT been technically approved by Local Authority and/or Water Authority.
All works subject to change through technical review process with relevant approving authorities.

P05	KERBING AMENDED	JF	NM	NM	09.05.25
P04	FOLLOWING MCC COMMENTS	JF	NM	NM	06.11.24
P03	FOLLOWING MCC COMMENTS	JF	NM	NM	22.07.24
P02	FOLLOWING MCC COMMENTS	JF	NM	NM	15.04.24
P01	FIRST ISSUE	JF	NM	NM	29.09.23

Rev	Details	Drawn	Checked	Auth	Date
-----	---------	-------	---------	------	------

Drawing Status	S4
PRELIMINARY ISSUE	

vectos. PART OF **SLR**

4th Floor Oxford Place
61 Oxford Street
Manchester
M1 6EQ

t: 0161 228 1008
e: manchester@vectos.co.uk

LRQA
CERTIFIED
ISO 9001

Client	DOMIS CONSTRUCTION LTD
--------	------------------------

Project Title	WATERHOUSE GARDENS
---------------	--------------------

Drawing Title	S278 FOOTWAY AND KERBS
---------------	------------------------

Scale: 1:500	Designed JF	Drawn JF	Checked NM	Authorised NM
Original Size A1	Date 29.09.23	Date 29.09.23	Date 29.09.23	Date 29.09.23
Drawing Number PIN/Proj. Ref. No. Originator Volume Location Type Role Number				Project Ref. No. 000382
000382 - SLR -XXX- XXX -DR-CH- 1100				Revision P05

