



Project No

23-2405

Project

**Land at Levenshulme Road
Gorton, Manchester**

Title

Surface Water Management Report

Date

April 2025

Revision

D

This report has been prepared for the private and confidential use of Watson Construction Ltd and cannot be reproduced in whole or in part or relied upon by any third party for any use whatsoever without the express written authorisation of CCS Consulting Limited. If any third party whatsoever comes into possession of this report, they rely on it at their own risk and CCS Consulting Limited accepts no duty or responsibility (including in negligence) to any such third party.

Author: Mark Symonds

Contents	Page
1. Introduction	3
2. Planning Policies and Guidance	4
3. Site Setting and Description	5
4. Surface Water Management Principles	6
5. Surface Water Run-Off Destination	8
6. SuDS Feasibility	9
7. Development Greenfield Run-Off Rates and Volume	12
8. Below Ground Drainage Networks and SW Management Calculations	14
9. Maintenance Requirements	17
10. Surface Water Design Exceedance	18
11. Water Quality	18
12. Development Management and Construction Phase	19
13. Conclusion / Summary	20

Appendices

Appendix A	-	Site Location Plan
Appendix B	-	Existing Site Plan
Appendix C	-	Proposed Site Plan
Appendix D	-	British Geological Survey Data
Appendix E	-	United Utilities Asset Plan
Appendix F	-	Greenfield Run-Off Rates and Volume Calculations
Appendix G	-	Below Ground Drainage Layout and Details
Appendix H	-	Surface Water Network / Management Calculations
Appendix I	-	Pollutant Control Chamber

1. Introduction

This surface water management report has been prepared by CCS Consulting in support of a detailed drainage design for a new residential development at Levenshulme Road, Gorton, Manchester, M18 7NF (hereafter referred to as the 'Site').

The report describes and demonstrates how the surface water run-off rate and volume from the post development site will be managed to adhere to National and local planning policy, regulations, and relevant design guidance, which include:

- National Planning Policy Framework (NPPF), July 2021 Paragraphs 153-158 and 159-169;
- National Planning Practice Guidance (NPPG);
- Principles of Sustainable drainage systems (SuDS) set out by DEFRA (2011);
- CIRIA (2010) Planning for SuDS;
- Ciria SuDS Manual C753 (2015);
- Non-Statutory Technical Standards for Sustainable Drainage Systems (March 2015);
- Manchester City, Salford City and Trafford Councils Level 1 SFRA (May 2010);
- Manchester City, Salford City and Trafford Councils Level 2 SFRA (March 2011);
- Manchester City Council – Local Flood Risk Management Strategy (March 2014);
- Manchester Local Development Framework – Core Strategy Development Plan (July 2012).

Manchester City Council, acting as Lead Local Flood Authority (LLFA), need to be satisfied that the design and drainage principles of the proposed development will address the surface water management and risk of flooding within the site; will ensure that the drainage is managed and maintained for its lifetime to prevent flooding; and will ensure that the development will not increase the risk of flooding to neighbouring land and property.

The report is formatted such that it identifies and references appropriate design parameters, shows by calculation how the proposed drainage strategy can meet the various requirements and ultimately controls, mitigates and reduces future flood risk both on and off site.

2. Planning Policies and Guidance

2.1. National Planning Policy Framework (NPPF) and National Planning Practice Guidance (NPPG)

The NPPF (July 2021) sets out the Government's planning policies for England and how these should be applied. It provides a framework within which locally prepared plans for housing and other development can be produced. This document is used to form this surface water management report, with particular attention to Paragraphs 153 to 158 Planning for Climate Change, and Paragraphs 159 to 169 Planning for Flood Risk.

NPPG, Paragraph 051 states that sustainable drainage systems (SuDS) are designed to control surface water run off close to where it falls and mimic natural drainage as closely as possible, where they provide opportunities to reduce the causes and impacts of flooding; remove pollutants from urban run-off at source; and to combine water management with green space with benefits for amenity, recreation, and wildlife.

Further to this NPPG, Paragraph 080 states that the aim should be to discharge surface run off as high up the following hierarchy of drainage options as reasonably practicable which (in order) are into the ground (infiltration); to a surface water body; to a surface water sewer, highway drain, or another drainage system; to a combined sewer.

2.2. Flood and Water Management Act

The Flood and Water Management Act takes forward some of the proposals from three previous strategy documents published by the UK Government - Future Water (2008), Making Space for Water (2008) and the UK Government's response to the Sir Michael Pitt's Review of the summer 2007 floods. In doing so it gives the EA a strategic overview role for flood risk, and gives local authorities responsibility for preparing and putting in place strategies for managing flood risk from groundwater, surface water and ordinary watercourses in their areas.

2.3. Manchester Local Development Framework – Core Strategy Development Plan

Relevant Policy EN 08 states:

'All new development will be expected to be adaptable to climate change in terms of the design, layout, siting, and function of both buildings and associated external spaces. In achieving developments which are adaptable to climate change developers should minimise flood risk by appropriate siting, drainage, and treatment of surface areas to ensure rainwater permeability, and will be permitted to use green infrastructure elements such as green roofs.'

Relevant Policy EN 14 states:

'All new development should minimise surface water run-off, including through Sustainable Drainage Systems (SUDS) and the appropriate use of Green Infrastructure. Developers should have regard to the surface water run-off rates in the SFRA User Guide. In CDAs, evidence to justify the surface water run-off approach / rates will be required.'

Relevant Policy EN 17 states:

'Development should avoid any adverse impact on water quality, including during the construction phase, and wherever possible should seek to enhance water quality, both chemical and ecological; Development should minimise surface water run-off from development and associated roads, and maximise the use of appropriate sustainable drainage systems, to minimise groundwater contamination, and to avoid pollutants reaching watercourses; Development close to a watercourse should also ensure that waste or litter cannot enter the watercourse from the site; Development should, where feasible and appropriate, seek to open up any culverted or hidden watercourse beneath the site to improve the ecological status of that watercourse.'

3. Site Setting and Description

3.1. Site Location

The Site is in a residential area of Groton, which is approximately 5km south-east of Manchester city centre, approximately 100m south-east of Ryder Brow train station, and as shown on the site location plan in Appendix A, is bound by railway lines to the north-west, Lowfell Walk to the south, and Levenshulme Road to the west. The nearest postcode to the site is M18 7NF, with co-ordinates for the centre of the site being - Easting: 388685, Northing: 395445.

3.2. Existing Site and Topography

As detailed on the existing site plan in Appendix B, the Site is currently undeveloped and consists of trees, shrubs and grassed areas, and therefore is deemed to be greenfield. The Site has a general fall from north to south, where the levels range from approximately 67.33m AOD to approximately 65.47m AOD.

3.3. Proposed Development

The proposed site is shown on the development plans in Appendix C, with a full description of the Site being stated by the Architect. In brief, and in relation to this surface water management report, the proposed development is to build a 21-unit apartment building and 6-residential dwellings to the north and east of the Site, with an access road from Levenshulme Road leading to parking to the south, driveways and access areas to the front of the buildings / dwellings, and patio areas leading to private gardens and soft-landscaping to the rear of the buildings / dwellings.

3.4. Ground Conditions

The ground conditions can be determined by the British Geological Survey (BGS) website, where it shows the Site to have superficial deposits of Till, Devensian (diamicton) over bedrock consisting of Collyhurst Sandstone Formation (sandstone). The BGS website also shows borehole log data 150m south of the Site in Sandown Crescent (see Appendix D), which shows the ground to predominantly consist of clay.

3.5. Waterbody / Rivers / Canals

The nearest water body is a small stretch of a watercourse to the south of the Site which forms part of the surface water sewer system site. The nearest main waterbody is the Gore Brook approximately 250m to the north.

3.6. On-Site Drainage and Public Sewers

As detailed on the United Utilities asset plan in Appendix E, there is a 600mm diameter culverted watercourse in Lowfell Walk to south of the Site, and 300mm diameter combined and surface water sewers in Levenshulme Road to west of the Site).

As the Site is undeveloped, it is believed that there are no drainage networks within the development boundary.

3.7. Surface Water Management Areas

The Site boundary area is approximately **5,060m² / 0.506 ha**.

The pre-development surface water run-off from within the Site will discharge off the site at a greenfield rate, with an urban factor of 0.

Surface water run-off from the building / dwellings, access road, driveways, parking bays, footpaths and patio areas equate to **3,000m² / 0.300 ha** and will form the surface water management area, with the surface water run-off from the garden and soft-landscaping areas continuing to discharge off the site at a natural / greenfield rate.

4. Surface Water Management Principles

The surface water for the development site is to be managed so that it adheres to the current national regulations and local authority requirements.

4.1. Run-Off Destination

Surface water run-off is to discharge to one or more of the following in the order of priority shown:

- Discharge into the ground (infiltration);
- Discharge to a surface water body;
- Discharge to a surface water sewer, highway drain or other drain;
- Discharge to combined sewer.

4.2. The Management Train

A concept fundamental to implementing a successful SuDS scheme is the management train. This is a sequence of SuDS components that serve to reduce run-off rates and volumes and reduce pollution. The hierarchy of techniques that are to be used for the surface water management of the development are:

- Prevention - Prevention of run-off by good site design and reduction of impermeable areas;
- Source Control - Dealing with water where and when it falls (e.g. infiltration techniques);
- Site Control - Management of water in the local area (e.g. swales, detention basins);
- Regional Control - Management of run-off from sites (e.g. balancing ponds, wetlands).

4.3. Design Principles

The design principles for the surface water management of the development will be to:

- Ensure that people, property, and critical infrastructure are protected from flooding;
- Ensure that the development does not increase flood risk off site;
- Ensure that SuDS can be economically maintained for the development.

4.4. Peak Surface Water Flow

Non-Statutory Technical Standards for Sustainable Drainage Systems states:

S2 For greenfield developments, the peak runoff rate from the development to any highway drain, sewer or surface water body for the 1 in 1 year rainfall event and the 1 in 100-year rainfall event should never exceed the peak greenfield runoff rate for the same event.

4.5. Volume Control

National Non-statutory technical standards for sustainable drainage systems states:

S4 Where reasonably practicable, for greenfield development, the runoff volume from the development to any highway drain, sewer or surface water body in the 1 in 100-year, 6-hour rainfall event should never exceed the greenfield runoff volume for the same event.

S6 Where it is not reasonably practicable to constrain the volume of runoff to any drain, sewer or surface water body in accordance with S4 above, the runoff volume must be discharged at a rate that does not adversely affect flood risk.

4.6. Flood Risk within Development

National Non-statutory technical standards for sustainable drainage systems states:

'S7 The drainage system must be designed so that, unless an area is designated to hold and/or convey water as part of the design, flooding does not occur on any part of the site for a 1 in 30-year rainfall event.

S8 The drainage system must be designed so that, unless an area is designated to hold and/or convey water as part of the design, flooding does not occur during a 1 in 100-year rainfall event in any part of: a building (including a basement); or in any utility plant susceptible to water (e.g. pumping station or electricity substation) within the development.

S9 The design of the site must ensure that, so far as is reasonably practicable, flows resulting from rainfall in excess of a 1 in 100-year rainfall event are managed in exceedance routes that minimise the risks to people and property'.

4.7. Pollution / Water Quality

The SuDS design for the development site will ensure that the quality of any receiving water body is not adversely affected and preferably enhanced in accordance with Ciria SuDS Manual C753, Chapter 4.

4.8. Designing for Exceedance

The development site design will be such that when SuDS features fail or are exceeded, exceedance flows do not cause flooding of properties on or off site. This is achieved by completely containing the surface water within the drainage system (including areas designed to hold or convey water) for all events up to a 1 in 30-year event. The design of the site ensures that flows from rainfall more than a 1 in 100-year rainfall event are managed in exceedance routes that avoid risk to people and property both on and off site.

5. Surface Water Run-Off Destination



The destination of the surface water run-off from the post development site has been assessed against the prioritisation set by the Approved Document H (2010). The feasibility of the surface water run-off to the priority receptors are as follows:


Run-Off Destination	Feasible / Required	Description
Discharge to Ground	No	Based on the BGS data, the ground at the Site predominantly consists of clay. Clay is known to have exceptionally low or no infiltration value and therefore discharge of the surface to ground is not feasible.
Discharge to Surface Water Body	Yes	There is a 600mm diameter culverted watercourse to the south of the south of the Site within Lowfell Walk The levels of the culverted watercourse are believed to be suitable for discharge by gravity, and therefore this surface water discharge destination is feasible
Discharge to Surface Water Sewer	No	There is a 300mm surface water sewer in Levenshulme Road to the west of the Site. However, as it is feasible to discharge to the culverted watercourse, discharge to this sewer is not required.
Discharge to Highway or Other Drain	No	There are no known highway drains near to the development site, and therefore this is not a feasible discharge destination.
Discharge to Combined Water Network	No	There is a 300mm combined water sewer in Levenshulme Road to the west of the Site. However, as it is feasible to discharge to the culverted watercourse, discharge to this sewer is not required.

6. SuDS Feasibility

To reduce the surface water run-off to the greenfield rate, SuDS methods are to be introduced to the post development design.

SuDS methods as per the Sustainable Drainage System (SuDS) hierarchy, and the Non-Statutory Technical Standards for Sustainable Drainage Systems – March 2015, that can be used are detailed below:

	Description	Setting	Required area
 Green roofs	A planted soil layer is constructed on the roof of a building to create a living surface. Water is stored in the soil layer and absorbed by vegetation.	 Building	Building integrated.
 Rainwater harvesting	Rainwater is collected from the roof of a building or from other paved surfaces and stored in an overground or underground tank for treatment and reuse locally. Water could be used for toilet flushing and irrigation.	 Building	Water storage (underground or above ground).
 Soakaway	A soakaway is designed to allow water to quickly soak into permeable layers of soil. Constructed like a dry well, an underground pit is dug filled with gravel or rubble. Water can be piped to a soakaway where it will be stored and allowed to gradually seep into the ground.	 Open space	Dependant on runoff volumes and soils.
 Filter Strip	Filter strips are grassed or planted areas that runoff is allowed to run across to promote infiltration and cleansing.	 Open space	Minimum length 5 metres.
 Permeable paving	Paving which allows water to soak through. Can be in the form of paving blocks with gaps between solid blocks or porous paving where water filters through the block itself. Water can be stored in the sub-base beneath or allowed to infiltrate into ground below.	 Street/open space	Can typically drain double its area.
 Bioretention area	A vegetated area with gravel and sand layers below designed to channel, filter and cleanse water vertically. Water can infiltrate into the ground below or drain to a perforated pipe and be conveyed elsewhere. Bioretention systems can be integrated with tree-pits or gardens.	 Street/open space	Typically surface area is 5-10% of drained area with storage below.

	Description	Setting	Required area
 Swale	Swales are vegetated shallow depressions designed to convey and filter water. These can be 'wet' where water gathers above the surface, or 'dry' where water gathers in a gravel layer beneath. Can be lined or unlined to allow infiltration.	 Street/open space	Account for width to allow safe maintenance typically 2-3 metres wide.
 Hardscape storage	Hardscape water features can be used to store run-off above ground within a constructed container. Storage features can be integrated into public realm areas with a more urban character.	 Open space	Could be above or below ground and sized to storage need.
 Pond / Basin	Ponds can be used to store and treat water. 'Wet' ponds have a constant body of water and run-off is additional, while 'dry' ponds are empty during periods without rainfall. Ponds can be designed to allow infiltration into the ground or to store water for a period of time before discharge.	 Open space	Dependant on runoff volumes and soils.
 Wetland	Wetlands are shallow vegetated water bodies with a varying water level. Specially selected plant species are used to filter water. Water flows horizontally and is gradually treated before being discharged. Wetlands can be integrated with a natural or hardscape environment.	 Open space	Typically 5-15% of drainage area to provide good treatment.
 Underground storage	Water can be stored in tanks, gravel or plastic crates beneath the ground to provide attenuation.	 Open space	Dependant on runoff volumes and soils.

The feasibility of the above SuDS methods for the post developed site are summarised in the table below:

SuDS Method	Feasibility	Description
Green Roofs	No	The proposed residential dwelling and apartment building roofs are pitched, and have not been structurally designed for living / green roof systems. Therefore, this is not a suitable SuDS method.
Rainwater Harvesting	Yes	The new dwellings and apartment building has not been designed for a dual pipe system to incorporate individual rainwater harvesting systems. However, water butts can be incorporated into some of the rainwater pipes, where the water can be used for irrigation.
Soakaway	No	Based on the BGS data, the ground at the Site predominantly consists of clay. Clay is known to have exceptionally low or no infiltration value and therefore the use of soakaways is no feasible
Filter Strips	Yes	Filter drain systems can be formed in the garden of the dwellings at the edge of the footpath and patio areas. The filter drain along the footpath and patios will take the

		surface water run-off from these areas, will not discharge the surface water directly to ground, but will be conveyed via a perforated pipe in a granular trench into the main drainage network. Filter drains will reduce the surface water run-off rate from the patio areas and will act as a pollutant control.
Permeable Paving	No	Due to the gradient of the road and parking bays, permeable paving cannot be utilised within the site. Therefore, is not a feasible SuDS method.
Swale / Shallow Pond	No	There are limited external garden areas that aren't either used for private gardens or landscaping consisting of existing trees and / or new planting. Therefore, due to the small areas of the site, the use of swales or ponds is not feasible.
Hardscape Storage	No	The external areas will be used for permeable paving or small footpath / patio areas, and therefore are limited areas for hardscape storage to be formed.
Underground Storage	Yes	The surface water run-off from the development site will be restricted. The restricted rate will be lower than the surface water run-off rate, therefore there will be a requirement to have further underground storage in the form of cellular units

7. Development Greenfield Run-Off Rates and Volume

To minimise the surface water run-off from the Site, it is preferred that the post development surface water run-off be restricted to the equivalent greenfield run-off rate and volumes.

7.1. Greenfield Run-Off Rate

The Flood Estimation Handbook (FEH) is often used for the calculation of the greenfield run-off rate, however, relevant documents state that to calculate the greenfield run-off rates on small catchments less than 25km², the IH 124 QBAR equation (and the equation for the instantaneous time to peak for the unit hydrograph approach) is to be used. The IH method is based on the Flood Studies Report (FSR) approach and is developed for use on catchments less than 25km². It yields the Mean Annual Maximum Flood (QBAR). This reference also recommends the use Ciria C753 Table 24.2 to generate Growth Factors. These are used to convert QBAR to different return periods for different regions in the UK. The input variables to establish QBAR are:

Return Period (years)	Results based on a range of return periods and the specified RP;
Area	Catchment Area (ha) which is adjusted to km ² for use in the equation;
SAAR	Average annual rainfall in mm (1941-1970) from FSR figure II.3.1;
Soil	Procedure Volume 3. Soil classes 1 to 5 have Soil Index values of 0.15, 0.3, 0.4, 0.45 and 0.5 respectively;
Urban	Proportion of area urbanised expressed as a decimal;
Region Number	Region number of the catchment based on FSR Figure I.2.4.

QBAR(l/s)

The output variables to establish QBAR are calculated using the following formula (equation yields m³/s):

$$\text{QBAR} = 0.00108 \times \text{AREA}^{0.89} \times \text{SAAR}^{1.17} \times \text{SOIL}^{2.17}$$

The IH 124 Variables (taken from FSR) that are specific to this site are as follows:

Area	=	50.00 ha (required area for calculation)
SAAR	=	864
Soil	=	0.450
Urban Factor	=	0.00
Region Number	=	10

The calculations in Appendix F, show the rate for 50.00ha is 281.0 l/s, but is to be reduced to reflect the surface water management area (0.300 ha) of the development site. Therefore, the QBAR (greenfield run-off) for development area has been calculated to be:

$$\text{QBAR} = 1.70 \text{ l/s (5.62 l/s/ha)}$$

Ciria C753 Table 24.2 identifies the growth factors for each of the storm events, based on the known QBAR figure. The growth factors from the table vary depending on the site location. In this case hydrometric area (Region Number) is 10.

Based on the figures shown in the table, the growth factors, and the existing greenfield run-off rates for each of the storm events for the development areas of the site are as follows:

Storm Event	QBAR	Growth Factor (C753 Table 24.2)	Greenfield Run-off Rate
Q ₂	1.70 l/s	0.93	1.6 l/s
Q ₃₀	1.70 l/s	1.70	2.9 l/s
Q ₁₀₀	1.70 l/s	2.08	3.4 l/s

7.2. Greenfield Run-Off Volume

The greenfield run-off volume for the 100-year, 6-hour storm event has also been calculated in the MicroDrainage software using the data from the FEH 2013, with the results shown in Appendix F.

The FEH 2013 data and variables used to calculate the greenfield run-off volume at the Site location area as follows:

Site Location = GB 388687 395445 SJ 88687 95445

Area = 0.300 ha

SAAR = 891

CWI = 121.752

SPR Host = 47.000

URBTEXT = 0.00

Based on these calculation results (Appendix F), the greenfield run-off volume for the surface water management area of the Site is:

Q_{100 (6-Hour)} = **106.82m³** (356.07m³/ha)

8. Below Ground Drainage Networks and SW Management Calculations

8.1. Climate Change Allowance

The NPPF makes it a planning requirement to account for climate change in the proposed design. The recommended allowances are taken from the Environment Agency guidance summarised in Figure 1 below.



Figure 1 - Department for Environment Food & Rural Affairs – Climate Change Allowances

The lifetime of the extension is likely to be beyond 2061, and therefore the Epoch 2070's is to be used with Upper End Allowance. Therefore, the climate change allowance for the pre and post development surface water run-off will be 40% and 45% for the 30-year and 100-year storms, respectively.

8.2. Surface Water Network Calculations

The calculations to determine the post development surface water run-off rates are based on the surface water run-off area of 0.300 ha, and the rainfall data given by the FEH 2013.

8.3. Surface Water Drainage Network and Management

As shown on the below ground drainage layout drawing in Appendix G, the proposed surface water main network will consist of 150mm to 375mm diameter pipes, 460mm inspection and silt trap chambers, 1500mm diameter manholes; permeable paving; filter drains; a 1500mm diameter flow control chamber containing a hydro-brake; and an attenuation tank in the form of cellular units.

The surface water run-off from the new roof areas will discharge to the main network via rainwater pipes with trap gullies; the surface water run-off from the access road, driveway and parking areas will discharge to the main drainage via trapped gullies, and the surface water run-off from the footpath and patio areas will discharge to the main drainage via the filter drains

The surface water network will flow towards the southern boundary of the site, and will discharge through the cellular units, flow control and pollutant control chamber prior to connection / discharge to the existing 600mm diameter culverted watercourse.

The surface water will surcharge the drainage network when being restricted, and will discharge back into the upstream network and cellular units, where the water will be stored to prevent flooding.

8.4. Surface Water Run-Off Rate

For the surface water run-off from the development site to be at the greenfield run-off rate, they are to be restricted to 1.6 l/s for the 1 in 1-year storm event; 2.9 l/s for the 1 in 30-year storm event including 40% climate change, and 3.4 l/s for the 1 in 100-year storm event including 45% climate change.

An assessment of the suitable flow control opening, and subsequent surface water discharge also needs to be assessed, where CIRIA document C753 – The SuDS Manual states that: *‘the flow controls / orifice design should be designed so that it has simplicity on operation, and has resistance to clogging, blocking or mechanical failure’*.

For this development, the greenfield run-off rates are deemed to be too low (maximum 1.6 l/s – 3.4 l/s), where the flow control opening to achieve the greenfield rates will have to be at a size where it is likely to cause a blockage and subsequent flooding. The suitable / minimum size of the flow control opening (hydro-brake opening) to reduce the risk of blockage is deemed to be 103mm.

As shown in the output calculation from the MicroDrainage computer software in Appendix H, if the hydro-brake opening is set at 103mm, the design flow at 5.0 l/s, with a design head of 1.200m, the maximum surface water run-off rates for each storm event will be as follows:

Strom	-	Rate
Q ₂	-	5.0 l/s
Q ₃₀ + CC	-	5.0 l/s
Q ₁₀₀ + CC	-	5.0 l/s

A summary of the post development surface water run-off rates compared to the greenfield rates are as follows:

Greenfield Rate to Post Development Rate

Strom	-	Greenfield	-	Post Dev
Q ₁	-	1.6 l/s	-	5.0 l/s
Q ₃₀	-	2.9 l/s	-	5.0 l/s
Q ₁₀₀	-	3.4 l/s	-	5.0 l/s

The results show that the post development run-off rates are an increase of the greenfield rates. However, the flow control opening to restrict the surface water at a minimum size where the risk of blockage and subsequent flooding will significantly reduce. Therefore, the rates are deemed to be acceptable.

8.5. Surface Water Run-Off Volume

The surface water run-off volumes for the post development site have also been calculated for 1 in 100-Year the 6-hour duration (Inc. 40% CC), using the peak surface water discharge rate, whereas detailed in the MicroDrainage calculation in Appendix H, where the volume equates to:

$$Q_{100 \text{ (6-Hour)}} = 5.0 \text{ l/s} \times (60 \times 60 \times 6) = 108,000 \text{ litres} = \mathbf{108.000m^3}$$

A summary of the post development run-off volumes compared to the greenfield volume is as follows:

Greenfield Volume to Post Development Volume

Strom	-	Greenfield	-	Post Dev
Q ₁₀₀	-	106.82m	-	108.00m ³

The post development surface water run-off volume is equivalent to the greenfield volume for the same storm event and duration. Therefore, the discharge volume is deemed to be acceptable, as it meets the requirements set out in the Non-Statutory Technical Standards for Sustainable Drainage Systems.

8.6. Surface Water Attenuation Calculations

As stated above, the post development run-off rates are restricted, there will be a requirement for surface water attenuation.

Ciria SuDS Manual 2015, Paragraph 10.2.4 states that: *'Exceedance flows (i.e. flows in excess of those for which the system is designed) should be managed safely in above-ground space such that risks to people and property are acceptable'*.

Attenuation structure formed of below ground attenuation tank in the form of cellular units.

As detailed in the MicroDrainage calculations (Appendix G) and below ground drainage strategy layout (Appendix F) the attenuation volumes and details for this SuDS method is as follows:

Cellular Units

Attenuation Tank Length	-	21.00m
Attenuation Tank Width	-	7.50m
Attenuation Tank Area	-	157.50m ²
Attenuation Tank Depth	-	1.20m
Attenuation Tank Volume	-	189.00m³

The MicroDrainage calculations (Appendix H) show that with this SuDS method / volume, and the proposed surface water drainage network, no flooding will occur for all storms up to and including the 100-year + 45% storm event.

9. Maintenance Requirements

The management and maintenance of the surface water drainage networks and SuDS features will be undertaken by Jigsaw Homes (landowner / management company).

The maintenance and management will be carried out as follows:

9.1. Surface Water Drainage Network, Flow Control and Cellular Units

Operation	Frequency
Inspect and identify any areas that are not operating correctly, if required, take remedial actions	Monthly for 3 months, then six monthlies
Debris removal from manholes (where may cause risk performance)	Monthly
Where rainfall into network from above, check surface or filter for blockage or silt, algae, or other matter by jetting	As required, but at least twice a year
Remove sediment from pipework by jetting.	Annually or as required
Repair/check all inlets, outlets, and overflow pipes	As required
Inspect/check all inlets, outlets, and overflow pipes to ensure that they are in good condition and operating as designed	Annually and after large storms

9.2. Permeable Paving and Filter Drains

Operation	Frequency
Inspect and identify any areas that are not operating correctly, if required, take remedial actions	Monthly for 3 months, then six monthlies
Debris removal from on surface of filter drain and permeable paving or near system (where may cause risk performance)	Monthly
Rainfall infiltration into permeable paving and / or filter drain is ensured working effectively.	As required, but at least twice a year

9.3. Linked and Further Maintenance Activities

The maintenance of the drainage network and SuDS features are to be linked with the wider site maintenance for the new residential landscaped / garden areas.

A log of all maintenance activities is to be kept and made available to the local planning authority (LPA) and / or the Lead Local Flood Authority (LLFA) on request.

10. Surface Water Design Exceedance

In the unlikely event of an extreme storm greater than 100-year + 45% climate change, or poor maintenance of the SuDS features and / or pipework, potential flooding of the drainage network could occur.

Surface water flow paths to follow existing and proposed ground topography, where water will flow towards the south-west boundary and into Levenshulme Road.

Flood water will flow away from the proposed buildings / dwellings and will not flow directly towards existing dwellings / properties outside the development boundary prior to discharge to Levenshulme Road. The flood water within the road will be contained due to the road having a gradient (water to flow along road) and upstand kerbs.

11. Water Quality

The level of water treatment is to be assessed against the details set out in Ciria SuDS Manual C753. Chapter 26 sets out the Pollution Hazard Indices for different land classifications, and how to calculate that against the SuDS mitigation indices to show suitable levels of treatment.

11.1. Access Road, Parking, Driveway, Footpath and Patio Areas - Pollutant Hazard

C753 Table 26.2 Pollution Hazard Level = Low

C753 Table 26.2 Pollution Hazard Index:

Total Suspended Solid (TSS)	=	0.5
Metals	=	0.4
Hydrocarbons	=	0.4
Pollution Hazard Index	=	1.30

11.2. Access Road, Parking, Driveway, Footpath and Patio Areas - Pollutant Mitigation

Mitigation Measures:

Pollutant Control Chamber

Permeable Paving Pollutant Mitigation Indices:

Total Suspended Solid (TSS)	=	0.8
Metals	=	0.8
Hydrocarbons	=	0.8
SuDS Mitigation Indices	=	2.40

The mitigation indices are greater than the pollution hazard index, and therefore suitable water quality is achieved.

12. Development Management and Construction Phase

All existing drainage networks within the development area are to be maintained during construction. The pipe network, cellular units, and flow control chamber are to be the first part of the drainage network to be built. This will ensure that the surface water discharge is suitably restricted without pollutants or flooding.

12.1. Construction Environment Management Plan

Full details of the construction environment management plan (CEMP) has to be confirmed by the chosen contractor who have been appointed for the development. Therefore, it is recommended that this is a planning condition, with the assurance that a CEMP will confirm to the requirements of CIRIA 753 – The SuDS Manual – Chapter 31. The construction programming for SuDS, however, for the development site will include:

12.2. Construction Access

The main construction traffic will access the site from Levenshulme Road to be west of the Site, and will ensure that traffic over the proposed cellular units will be avoided.

12.3. Sediments and Traps

Sediment basins and traps are to be installed before any major site earthworks take place, with further sediment traps and silt fences being installed as the earthworks progresses. This will keep sediment contained on site at appropriate locations.

12.4. Run-Off Control Measures

Run-off control measures are to be used in conjunction with sediment traps to divert water around planned earthworks areas to remove silts. Any surface water upstream of the site is to be diverted around the development areas, and to discharge to the existing culverted watercourse. The surface water run-off destination for the diverted surface water will continue as existing.

12.5. Main Surface Water Run-Off Systems

The main drainage network, cellular units, flow control chamber, and outfall to the culverted watercourse are to be built prior to any phase of construction of site. Surface water from each of the phased area is to discharge to the new drainage network, where the water is adequately restricted, and water quality maintained before discharging to the culverted watercourse. Temporary inlet and outlet protection measures and appropriate silt traps are to be installed to prevent silt ingress into the main drainage network.

12.6. Clearing and Earthworks

Clearing and earthworks will only start when adequate erosion and sediment control measures are in place. Once the development areas are cleared, earthworks will follow immediately to ensure that the ground cover can be re-established quickly. Adjacent land to that being developed will be left undisturbed for as long as possible.

12.7. Surface Stabilisation Measures

Surface stabilisation measures will be applied to completed areas, channels ditches and other disturbed areas after the land is cleared and profiled. Permanent stabilisation measures will be installed as soon as possible after final profiling.

12.8. Construction of Permeable Surfacing

Construction of permeable paving is to be left to the later stages of construction. Unsuitable sediment is to be removed from surfacing prior to installation of sand binder layer and paving.

13. Conclusion / Summary

13.1. SuDS Principles and Discharge Destination

All feasible SuDS methods, and surface water discharge destination have been assessed, with the feasible SuDS methods being permeable paving, filter drains, cellular units and a flow control chamber, and the surface water destination being to a waterbody (culverted watercourse).

13.2. Peak Flow Control

The post development run-off rates at 5.0 l/s are an increase of the greenfield rates. However, the flow control opening to restrict the surface water at a minimum size where the risk of blockage and subsequent flooding will significantly reduce. Therefore, the rates are deemed to be acceptable.

13.3. Volume Control

The post development surface water run-off volume is equivalent to the greenfield volume for the same storm event and duration. Therefore, the discharge volume is deemed to be acceptable. Therefore, the discharge volume is deemed to be acceptable, as it meets the requirements set out in the Non-Statutory Technical Standards for Sustainable Drainage Systems.

13.4. Flood Risk within the Development

The MicroDrainage calculations (Appendix H) show that with this SuDS method / volume, and the proposed surface water drainage network, no flooding will occur for all storms up to and including the 100-year + 45% storm event.

13.5. Maintenance

The management and maintenance of the surface water drainage networks and SuDS features will be undertaken by Jigsaw Homes who are the owner and management company of the properties and unadopted roads including drainage infrastructure and landscape areas.

13.6. Surface Water Design Exceedance

In the unlikely event of an extreme storm greater than 100-year + 45% climate change, or poor maintenance of the SuDS features and / or pipework, potential flooding of the drainage network could occur.

Surface water flow paths to follow existing and proposed ground topography, where water will flow towards the south-west boundary and into Levenshulme Road. Flood water will flow away from the proposed buildings / dwellings and will not flow directly towards existing dwellings / properties outside the development boundary prior to discharge to Levenshulme Road. The flood water within the road will be contained due to the road having a gradient (water to flow along road) and upstand kerbs.

13.7. Water Quality

The level of water treatment is to be assessed against the details set out in Ciria SuDS Manual C753. Chapter 26 sets out the Pollution Hazard Indices for different land classifications, and how to calculate that against the SuDS mitigation indices to show suitable levels of treatment. The mitigation indices are greater than the pollution hazard index, and therefore suitable water quality is achieved.

13.8. Construction Environment Management Plan

All existing drainage networks within the development area are to be maintained during construction. The pipe network, cellular units, and flow control chamber are to be the first part of the drainage network to be built. This will ensure that the surface water discharge is suitably restricted without pollutants or flooding.

Appendix A

Location Plan

Appendix B

Existing Site Plan


Appendix C

Proposed Site Plan

Appendix D
Ground Investigation Data



SJ89NE
821



MINI • SOIL • SURVEYS

JOB NUMBER CAS0235

BOREHOLE No. 2 of 4

CREW A

SITE 17 Wayland Rd, South Gorton

DATE DRILLED 16/08/90

GROUND LVL (if recorded)

Description	Depth	Leg	Sample/Test
Tarmac overlying cinder and ash FILL, with occ., brick and gravel.	0.25		
350mm brown clay FILL, with occ., brick and gravel fragments, overlying brown fine to medium sand FILL.			
Slightly organic grey clay FILL, with occ., peat bands and gravel fragments. Some ash and cinder.	0.70		1.2 SPT N= 3
Soft to firm grey organic CLAY, with occ., peat bands.	1.60		
Very stiff, brown CLAY, with occ., fine gravel and black shale.	2.30		2.9 SV 140+Kn/m ² 3.0 SPT N= 33
End of hole.	3.30		3.4 SV 140+Kn/m ²

Comments: Hole dry.
SPT @ 1.2 1/0/1,1,1,0
SPT @ 3.0 6/7/7,8,9,9

SJ89NE 820-85




MINI • SOIL • SURVEYS

CAS0235

17 Wayland Road, South Gorton

Borehole and Trial Pit Layout

Not to scale

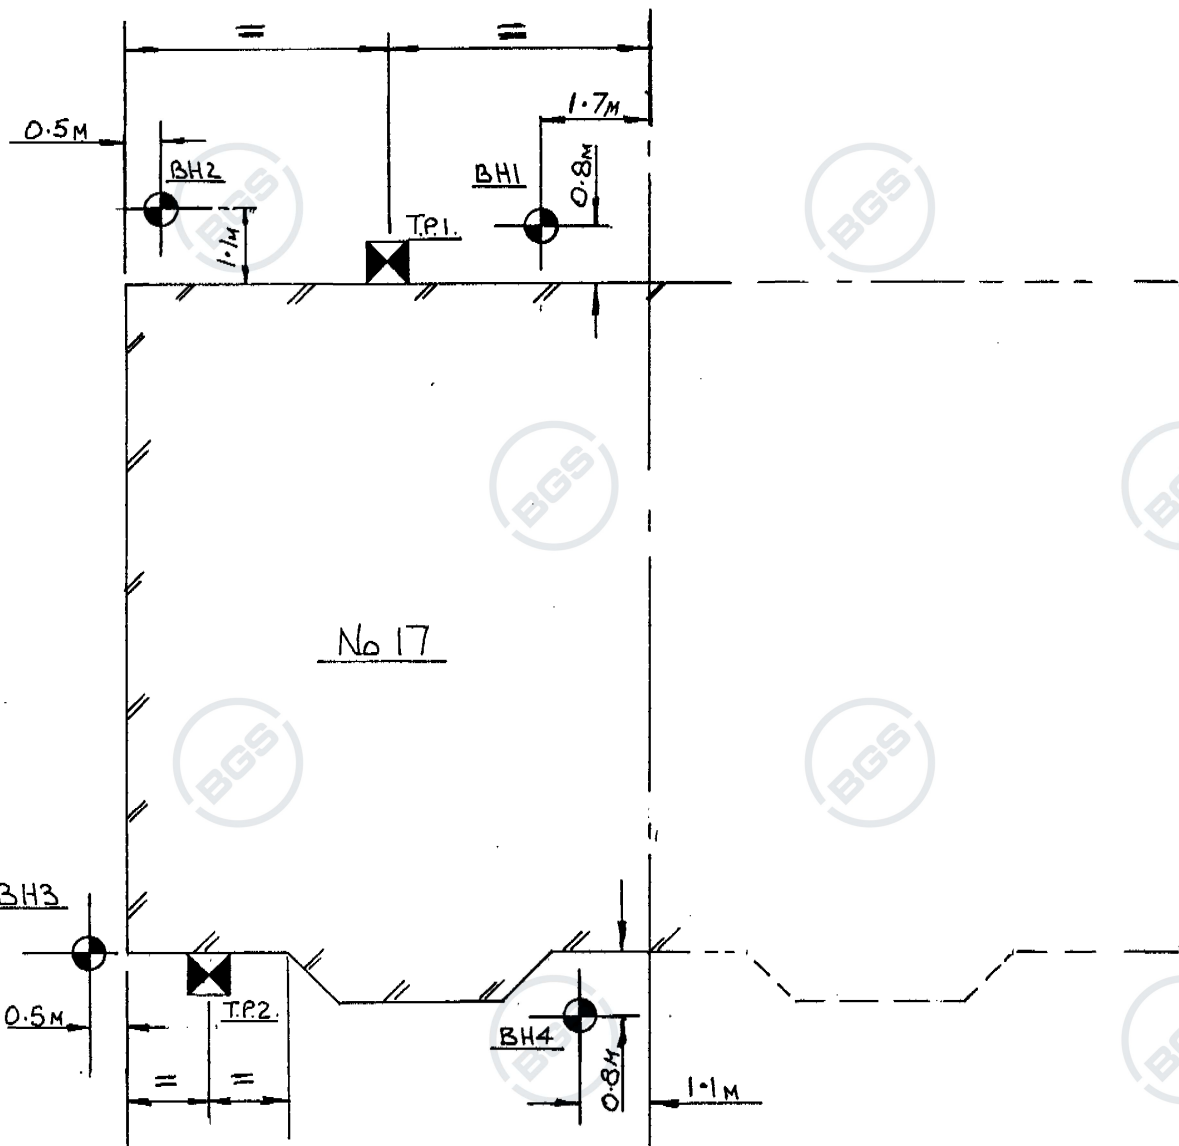



Borehole Log

Site 31, Sandown Crescent, Gorton, Manchester

Client Manchester City Council

Borehole No. 4

Grid Ref.

Ground Level Existing garden

Job No. S.I. 5217

Date Sep. 1991

Diameter 100 mm

Method Rotary

Scale 1:20

Description	Depth m	Legend	O.D. level m	Samples and in situ tests			Shear Strength kN/m ²	Groundwater
				Depth, m	Type	Test		
Soil - (With Fill)	0.400							
FILL - Clay, ash, brick	1.100							
Clay - Stiff, mid brown sand lenses mottled grey	1.700			1.200		V	105	
				1.500		V	95	
Clay - Soft to Firm, plastic sand lenses	2.000			1.800		V	48	
Clay - Firm, dark brown	2.200			2.000		V	98	
Sand - Fairly compact silty damp	2.700							
Clay - Stiff glacial till (unable to bore further stone obstruction?)	2.850			2.800		V	152	
								No ground water
Remarks						Key: U - undisturbed B - bulk D - disturbed S - SPT: SC - Solid Cone C - Core W - Water V - Vane		

Northern Foundations




Site 31, Sandown Crescent, Gorton, Manchester

Job No. S.

Client Manchester City Council


Date Se

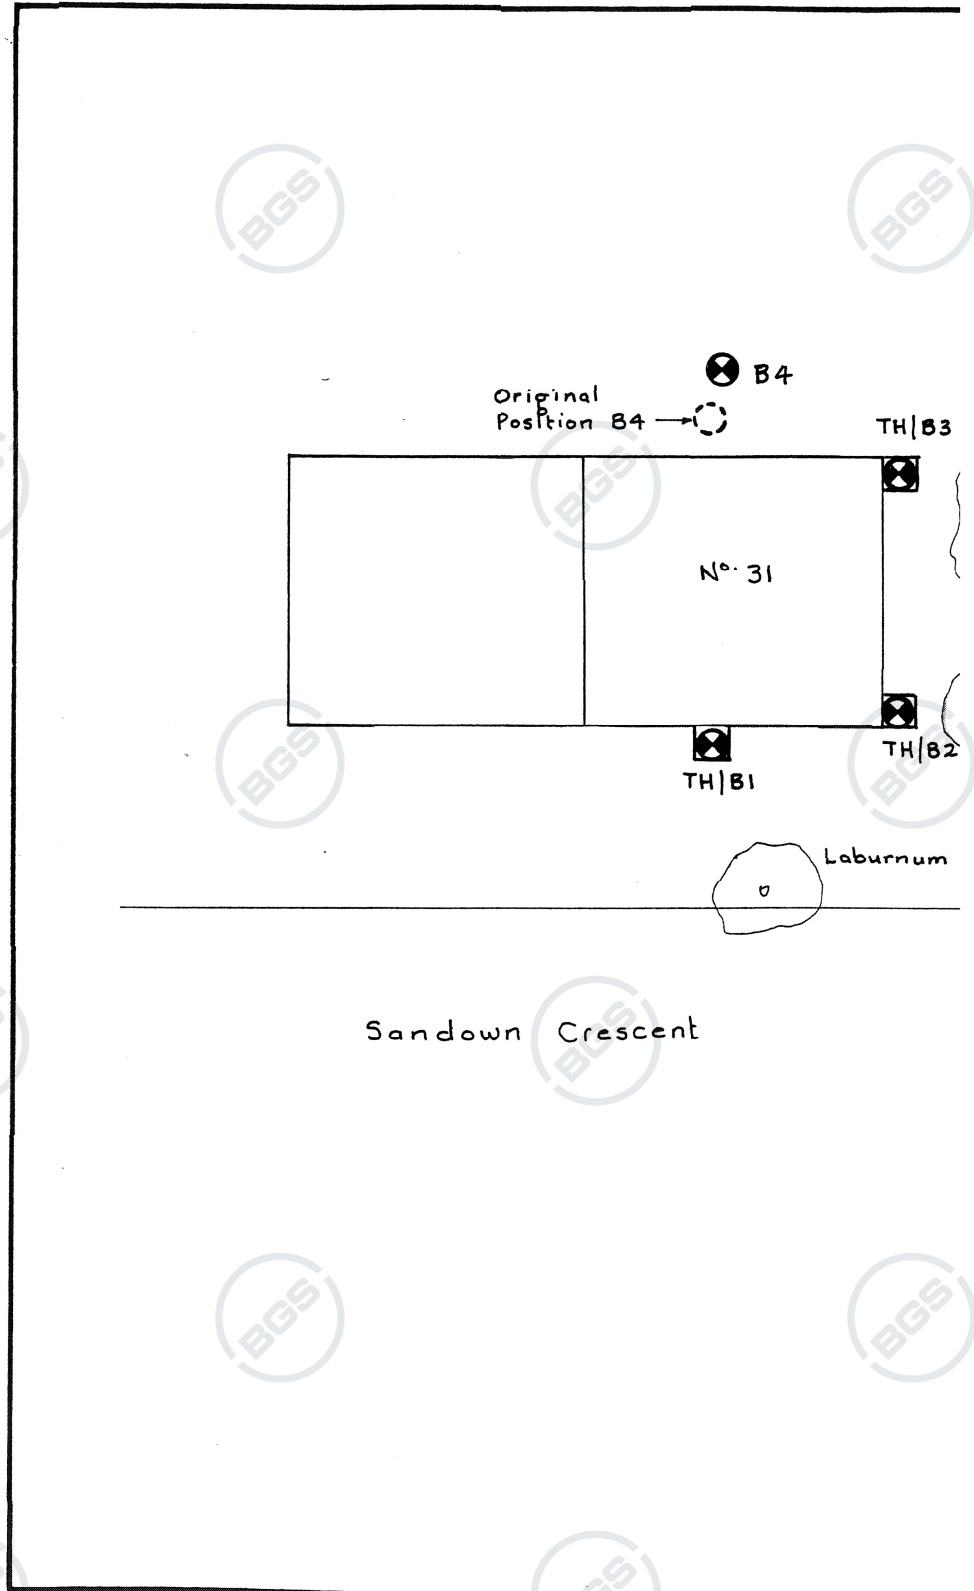

NORTHERN FOUNDATIONS LIMITED

Appendix E

United Utilities Asset Plan

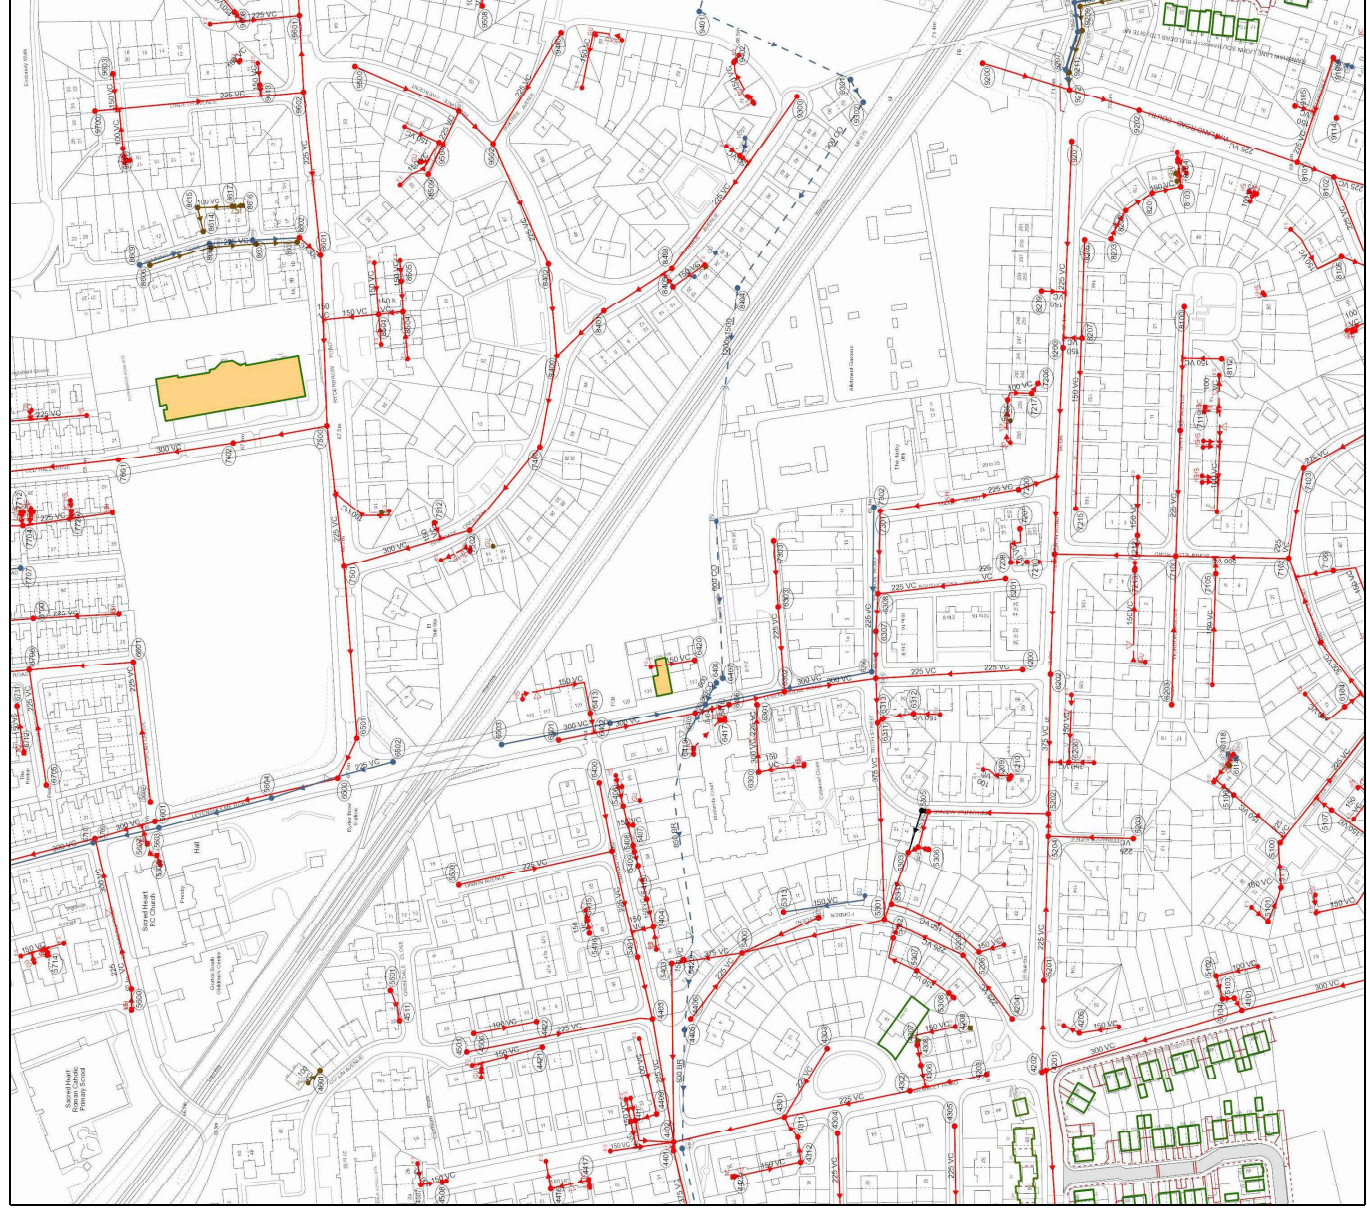[illegible]

Legend

Abandoned

Final

Surface Water

Combined

Public Sewer

Private Sewer

Sanitary Sewer

Rising Main

Staging Main

Offstream

Water Course

Highway Drain

All project assets follow the standard colour convention:

red - combined

green - final

purple - overview

MANHOLE FUNCTION

- FD Final
- CS Combined
- CV Combined
- OV Overflow

SEWER SHAPE

- C Circular
- EG Egg
- OV Oval
- FT Flat Top
- RE Rectangular
- SD Square

SEWER MATERIAL

- AC Asbestos Cement
- BR Brick
- PP Polypropylene
- CSB Concrete Segment Bored
- CSU Concrete Segment Unbored
- CC Concrete Box Culverted
- PBC Plastic / Steel Composite
- DI Ductile Iron
- PPH Polypropylene HDPE
- CI Cast Iron
- SI Spun Iron
- VC Vertiflow Clay
- PP Polypropylene
- PPH Polypropylene
- MC Memory, Covered
- MR Memory, Uncovered
- U Unspecified

SEWER SHAPE

- 78 Trapezoidal
- VR Arch
- SA Barrel
- HO Horse Shoe
- JN Unspecified

Address or Site Reference: 115 LEVENSHULME ROAD, MANCHESTER, M16 7NF	Scale: 1:1250 Date: 18/02/2022 Sheet: 1 of 1 Printed by: Property Searches	SEWER RECORDS  United Utilities Water for the North West
---	--	--

The position of the underground apparatus shown on this plan is approximate only and is given in accordance with the best information currently available. United Utilities Water will not accept liability for any loss or damage caused by the actual position being different from those shown.

Crown copyright and database rights 2017 Ordnance Survey 100022432. Unauthorised reproduction will infringe these copyrights.

Appendix F

Greenfield Run-Off Rates and Volume Calculations

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Greenfield Run-Off Rate Calculations	
Date 04/05/2023 File	Designed by MDS Checked by MDS	
Innovyze		Source Control 2020.1.3

IH 124 Mean Annual Flood

Input

Return Period (years)	1	Soil	0.450
Area (ha)	50.000	Urban	0.000
SAAR (mm)	864	Region Number	Region 10

Results 1/s

QBAR Rural 281.0
QBAR Urban 281.0

Q1 year 244.5

Q1 year 244.5
Q2 years 261.7
Q5 years 334.4
Q10 years 387.8
Q20 years 441.8
Q25 years 460.8
Q30 years 476.4
Q50 years 519.8
Q100 years 584.5
Q200 years 663.1
Q250 years 688.4
Q1000 years 854.2

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Greenfield Run-Off Volume Calculations	
Date 04/05/2023 File	Designed by MDS Checked by MDS	
Innovyze		Source Control 2020.1.3

Greenfield Runoff Volume

FEH Data

Return Period (years)	100
Storm Duration (mins)	360
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Areal Reduction Factor	1.00
Area (ha)	0.300
SAAR (mm)	891
CWI	121.752
SPR Host	47.000
URBEXT (1990)	0.0000

Results

Percentage Runoff (%)	51.03
Greenfield Runoff Volume (m³)	106.817

©1982-2020 Innovyze

Appendix G
Below Ground Drainage Layout and Details

General Drainage Notes:

Existing details shown on this drawing including sewers, existing drains, coverings and manholes shall be assumed to be correct unless otherwise indicated or confirmed to the engineer prior to the commencement of any new construction. All existing drainage depths, size and conditions, to which the proposed drainage is to connect, are to be confirmed prior to the commencement of any drainage works.

All drainage works shall be carried out in accordance with the requirements of the local authority and in conjunction with all relevant British Standards, Codes of Practice and 'Sewers for Adoption' 7th Edition and amendments as appropriate.

All drainage shall comply with the typical drainage construction details and the requirements of BS EN 752.

Access covers and frames shall comply with the loadings specified and to BS EN 124 and be marked off if recessed covers are specified then in accordance with F.A.C.T.A. Association equivalent.

The proposed building outlines shown on this drawing are for information only. Refer to Architects plans for precise location setting out information and details.

All underground drainage shall be clear of foundations unless shown otherwise with long radius bends kept to a minimum and used where unavoidable.

All sewers and pipes at the head of each four run shall be vented to the atmosphere.

All private drainage pipework for foul and surface water systems have been designed on the basis of UPMC to BS EN 1401-1, unless indicated otherwise. Where new drainage is situated within 5 metres of new or existing trees the pipework shall be encased in concrete to reduce the risk of root ingress.

Concrete encasement of this pipework shall be required where the vertical clearance between two pipes is less than 300mm.

All existing drainage shall be assumed to be live and shall be maintained at all times during the works. Existing drainage shall be connected to the new drainage system and shall be maintained in good working order. All existing drainage to be abandoned shall be sealed by appropriate means.

Upon completion all new drainage installation together with any existing drainage shall be tested and certified by a competent person. The Contractor to ensure that the drainage system is fully operational, free of excess debris and all identified faults rectified.

HEALTH & SAFETY: The works shall be carried out by specialist competent operatives who shall be fully trained and qualified for the operations they are required to undertake. All work shall be carried out in accordance with the relevant Health & Safety Regulations.

P5	SW Drainage & Tank Locations Updated to Suit Contractor As-installed Information.	JF	29.05.24
P4	Updated to Suit Latest Architectural Layout.	JF	26.05.23
P3	Revised to Suit Client Comments	MDS	17.05.23
P2	Revised to Suit Client Comments	MDS	10.05.23
P1	Preliminary Issue	MDS	05.05.23
rev	amendments	by	date



Client: Watson Construction Ltd

Project: Levenshulme Road, Gorton

Title: Below Ground Drainage Layout Overall

Drawing Status: Preliminary

Date Created: May '23

Drawing Scale: 1:200 @ A1


23-2405/A1 / 200 P5

Project Leader: LS

Drawn By: MS

Initial Review: LS

Preliminary Issue - For Discussion Purposes Only

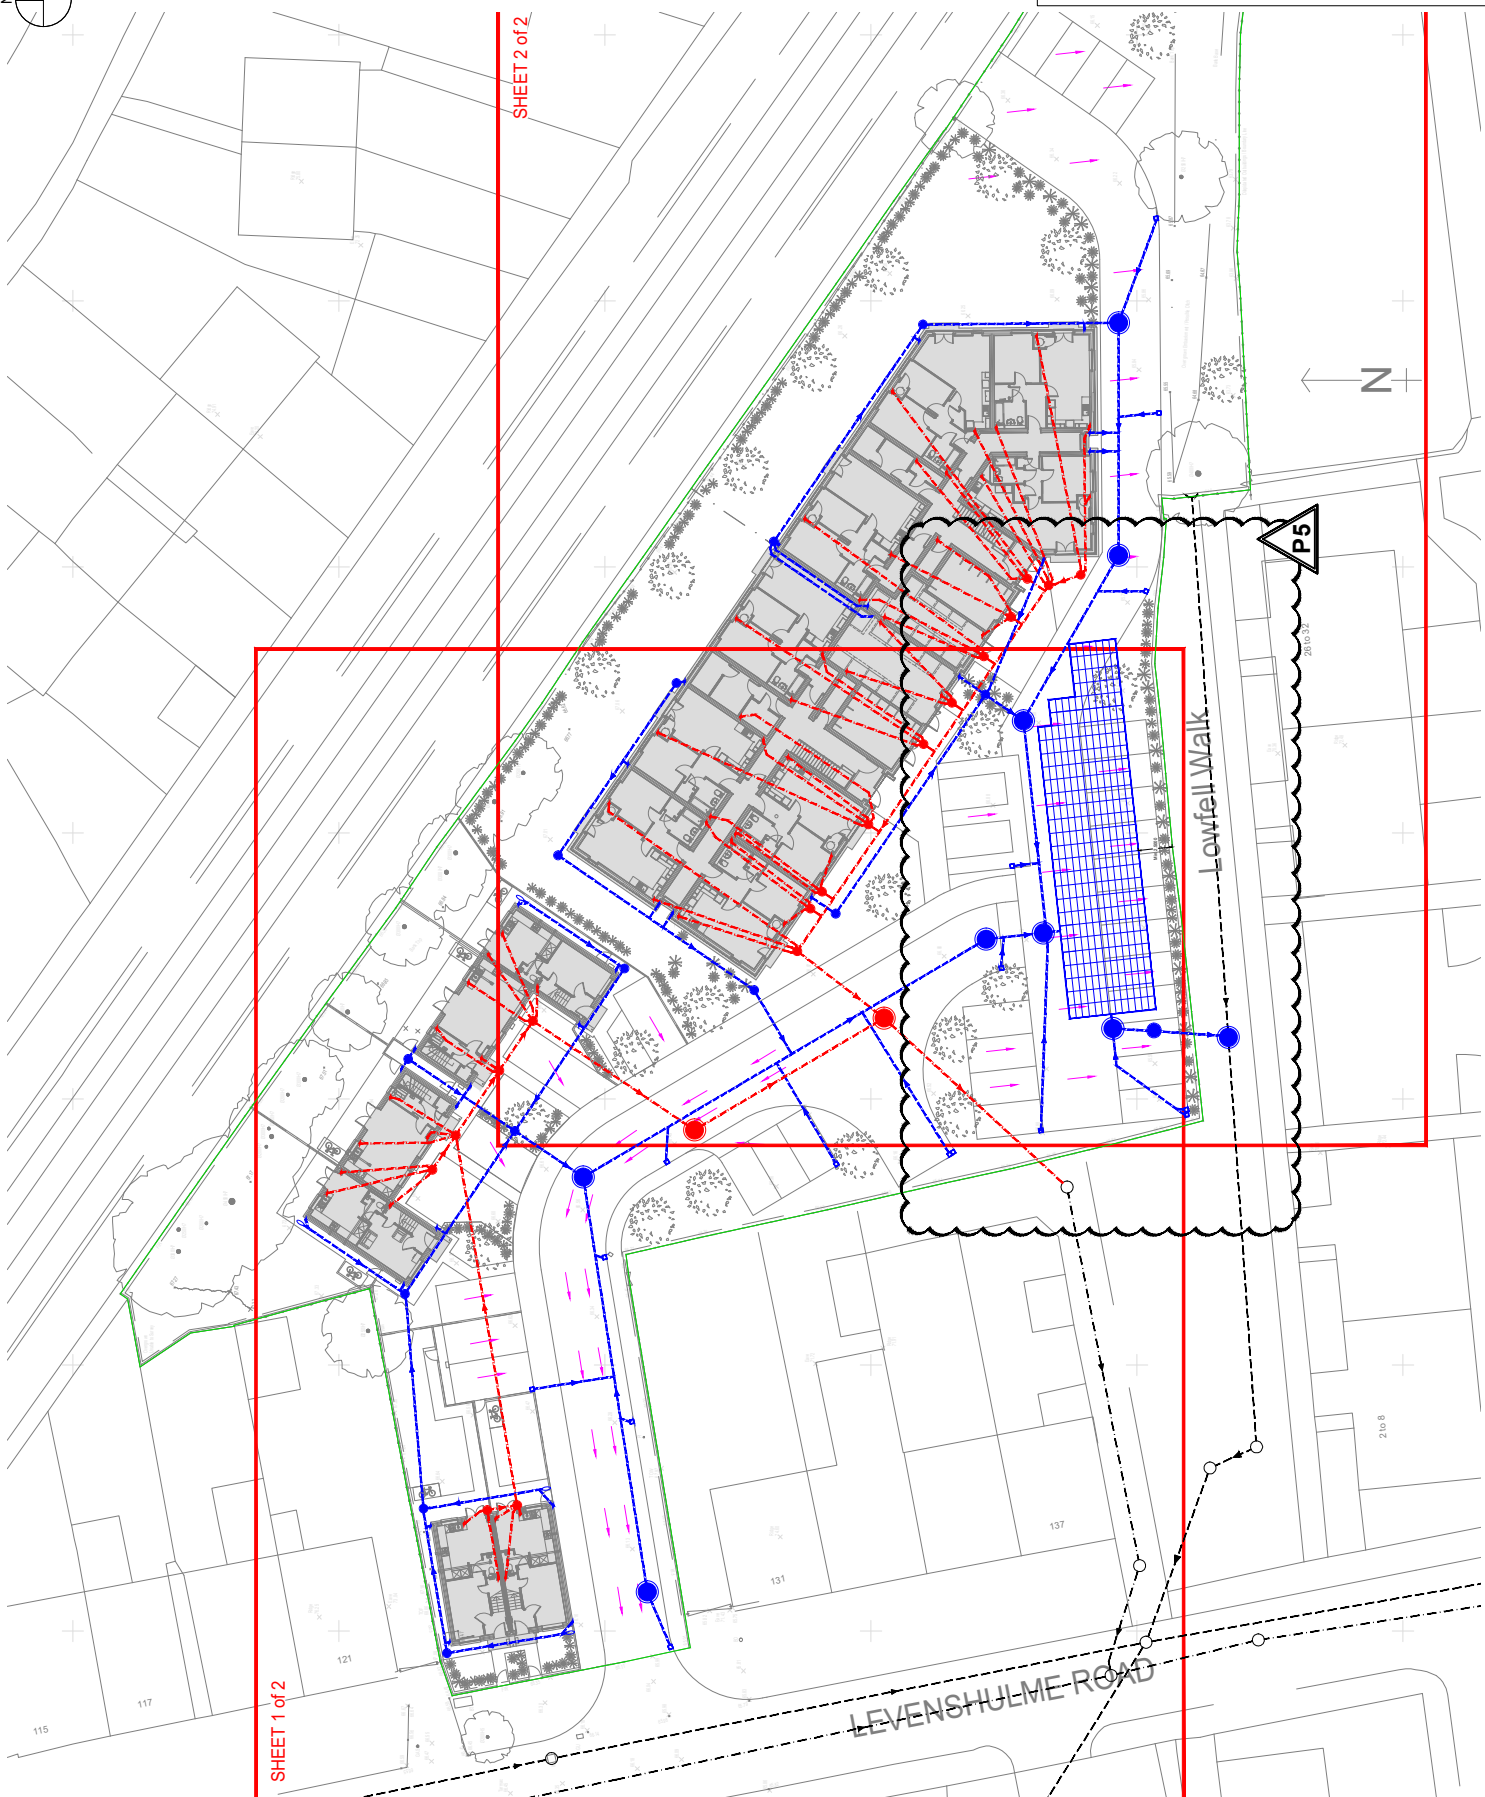

SHEET 1 of 2

SHEET 2 of 2

[illegible]

Client:	Watson Construction Ltd		
Project:	Levenshulme Road, Gorton		
Title:	Below Ground Drainage Layout Sheet 1 of 2		
Drawing Status:	Date Created:	Drawing Scale:	
Preliminary	May 23	1:125@A1	
23-2405/A1 / 201		P9	
Project Leader:	Drawn By:	Initial Review:	
	MS	LS	

Site Specific Drainage Notes:

Rainwater pipe (RWP) and foul down pipe (SVP/SS) locations to be confirmed by Architect and M+E Engineer. Discrepancies to be brought to CCS Consulting's attention prior to the commencement of drainage works. Design subject to change.

Existing combined water sewer (to which the proposed PW is connecting) location and depth to be confirmed prior to the commencement of any drainage works.

Existing surface water sewer (to which the proposed SW is connecting) location and depth to be confirmed prior to the

All foul water pipes to be 100Ø, and all surface water pipes to be 150Ø unless shown otherwise.

Rainwater pipes to have rest bend invert of 600mm below finished floor level unless stated otherwise.

Foul water down pipes to have red bend invert of 450mm below finished floor level unless stated otherwise.

Surface water drainage networks and attenuation design to prevent flooding up to and including 100-year + 45% climate change storm event.

Drairage networks with in access road to be built to adoptable standards.

Drainage Key:

Below Ground Foul Water Drainage

RG Surface Water Road Gully

SVP	Soil Vent Pipe to Below Ground
SS	Stub Stack to Below Ground

Waste Pipe to Below Ground

Development Boundary

Final Details for Sewer Connection
TBC by Main Contractor.

Dentles Proposed Exceedance Flow Route

[illegible]

P9	S11 and S25/C Invert Level Attained	MDS	13.08.20
P8	SW Drainage & Tank Locations Updated to Suit Contractors As-Installed Information.	JF	29.05.24

D7	Attenuation Tank Details Updated following Flow Control Upgrades to one as per contractor's Request.	IE	44 OE 24
----	--	----	----------

p6	Updated to Suit Council Comments: Floor Exceedance Routes Added.	JF	23.02.24
----	---	----	----------

p5	Existing Sewer Information Updated Following Further Coordination.	JF	27.06.23
----	--	----	----------

P3	Revised to Suit Client Comments. Cover Levels Revised Following External	JF	17.05.23
P4	Additional Runs Included.	JF	20.05.23

P2	Revised to Suit Client Comments	MDS	10.05.23
----	---------------------------------	-----	----------

P1	Preliminary Issue	MDS	05.05.23
----	-------------------	-----	----------

rev	amendments	by	date
-----	------------	----	------

MANCHESTER LONDON SEAS

Client: **Watson Construction Ltd**

Levenshulme Road, Gorton

Table:


Below Ground Drainage Layout
Sheet 1 of 2

	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525
--	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Preliminary	May '23	1:125@A1
-------------	---------	----------

23-2405/A1 / 201 P9

Project leader:	LS	Drawn by:	MS	Initial review:	LS
-----------------	----	-----------	----	-----------------	----

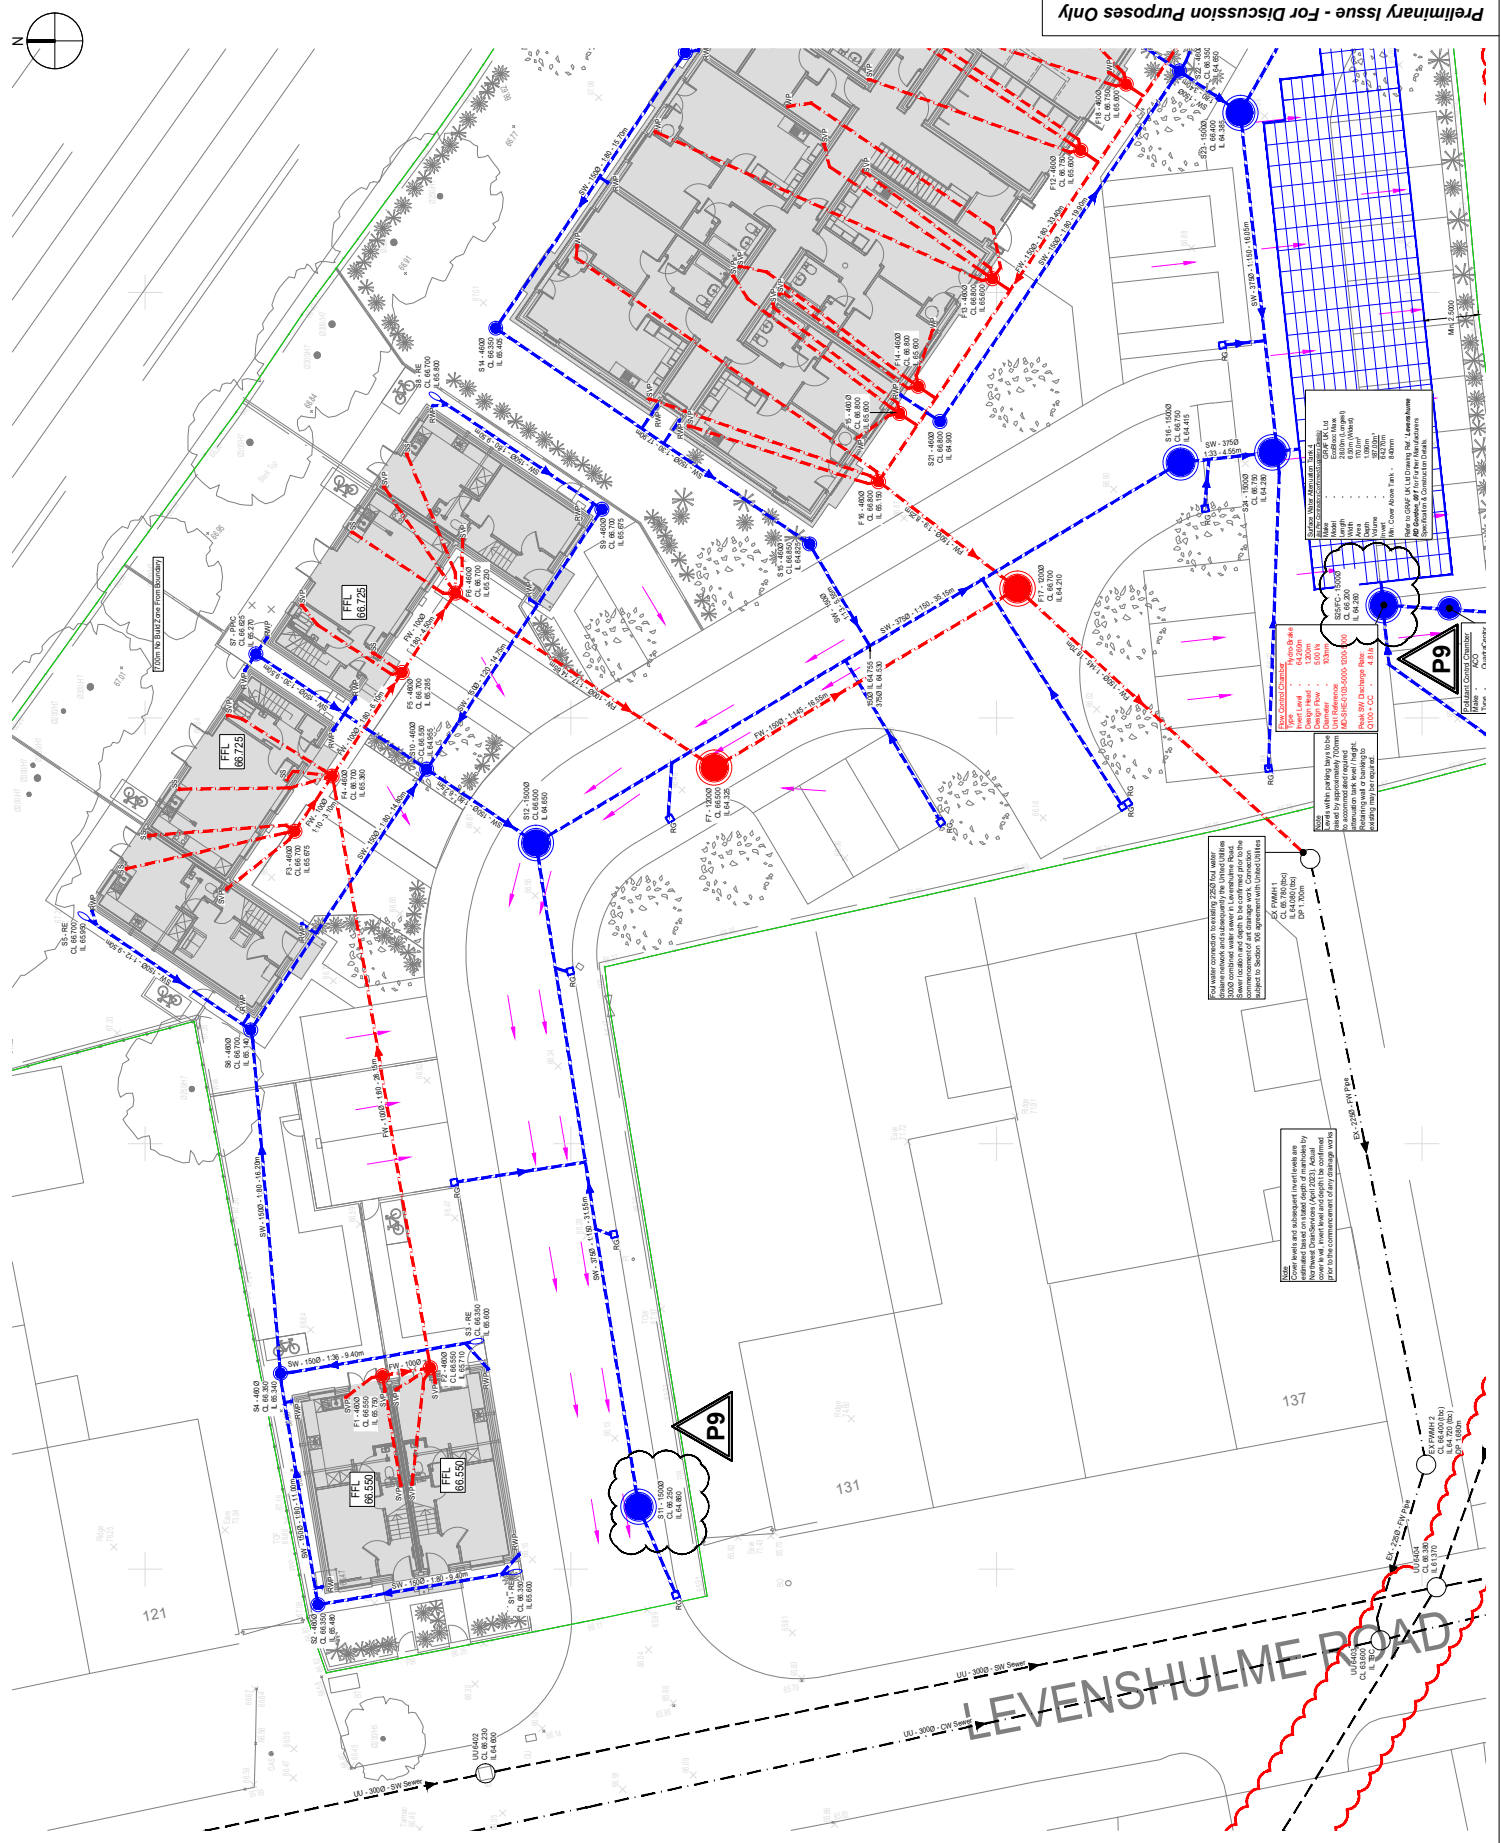

Rainwater pipe (RWP) and foul down pipe (SVP/SIP) locations to be confirmed by Architect and M+E Engineer. Descriptions to be brought to CQS Consulting's attention prior to the commencement of drainage works. Design subject to change.

Finished floor and external levels to be confirmed by Architect prior to the commencement of drainage works. Manhole and inspection chamber cover levels subject to change once known.

Existing combined water sewer (to which the proposed FW is connecting) location and depth to be confirmed prior to the commencement of any drainage works.

Filler Drains Note
Filler Drains to be built along edge of patio and footpath areas and to be formed of 300 x 300mm trench filled with 20mm no fines aggregate and wrapped in impermeable membrane. Granular trench to house a 100/2 perforated pipe to convey surface water to main drainage network.




Client: **Watson Construction Ltd**


Project: Levenshulme Road Gorton

Title: Below Ground Drainage Layout
Sheet 2 of 2


Drawing Status: Preliminary	Date Created: May '23	Drawing Scale: 1:125 @ A1
23-2405/A1 / 202 P10		
Project Leader: LS	Drawn By: MS	Initial Review: LS

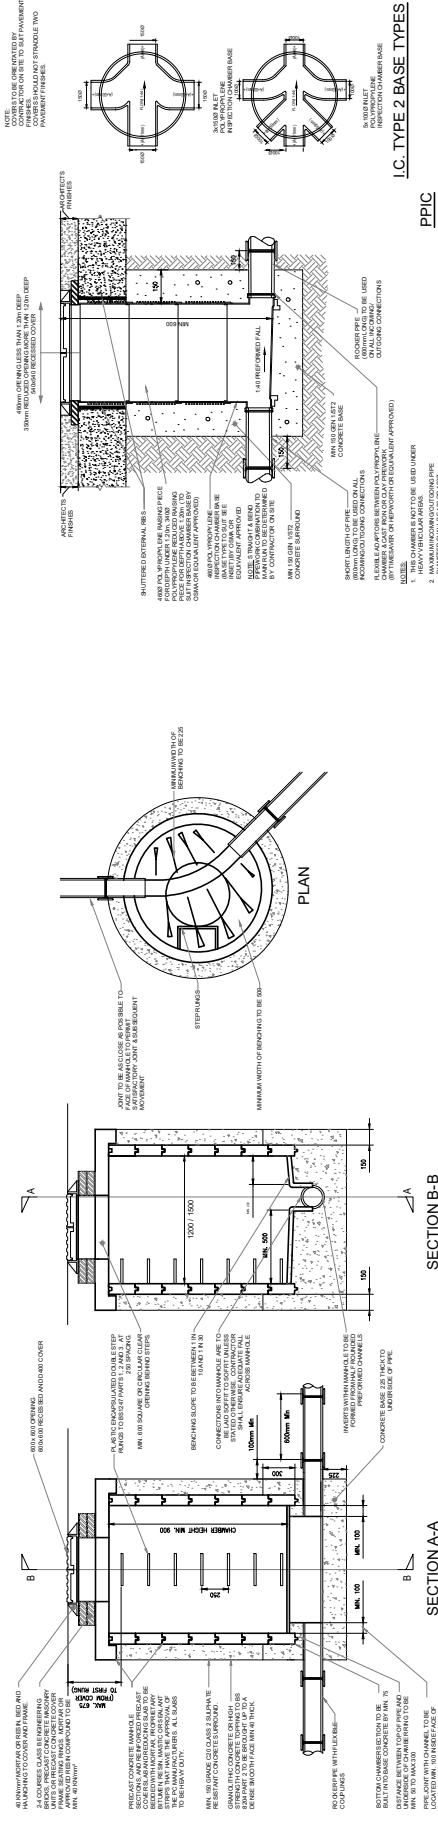


MANHOLE TYPE B
CIRCULAR PRECAST CONCRETE MANHOLE DETAIL
(DEPTH MORE THAN 1.50m TO TOP OF PIPE)

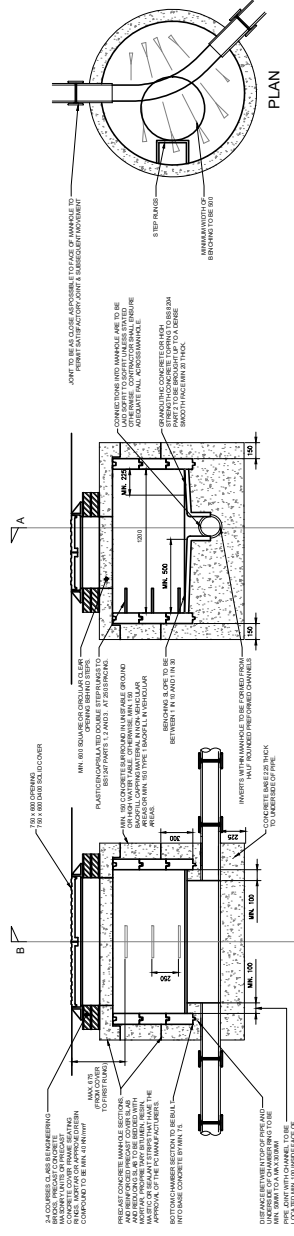


MANHOLE TYPE E
CIRCULAR PRECAST CONCRETE MANHOLE DETAIL
(DEPTH LESS THAN 1.50m TO TOP OF PIPE)

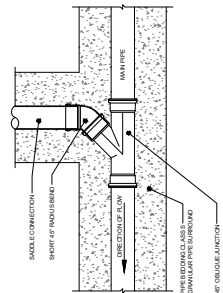


TYPICAL 45° PIPE JUNCTION
CONNECTION DETAIL

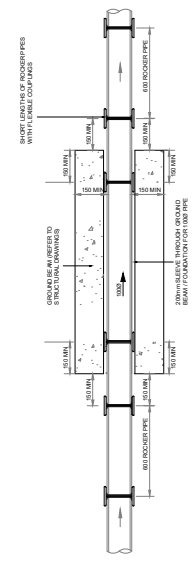

TYPICAL PIPE THROUGH GROUND BEAM /
FOUNDATION DETAIL

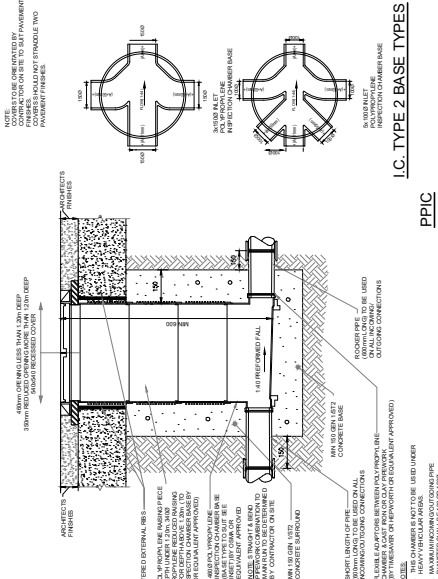


POLYPROPYLENE INSPECTION CHAMBER

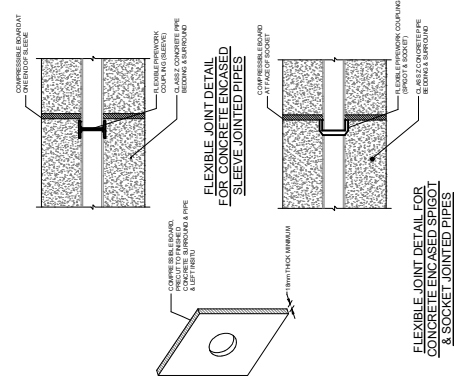


FLEXIBLE JOINT DETAIL FOR
CONCRETE ENCASED PIPES
(TO B.S. 1142)


P1	Preliminary Issue	MUS	04.05.23
	rev	amendments	by date
Client: Watcon Construction Ltd			
Project: Levenshulme Road Gorton			
Title: Below Ground Drainage Details Sheet 1			
Drawing Status: Preliminary	Date Created: May '23	Drawing Scale: N.T.S	
22-2365 / A1 / 104		P1	
Project Leader: LS	Drawn By: MS	Initial Review: LS	

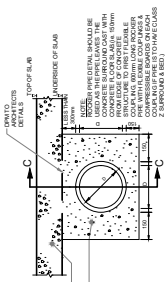

SECTION AA
WHERE DISTANCE BETWEEN PIPE SOFFIT & UNDERSIDE OF CONCRETE GROUND BEAM IS LESS THAN 300mm

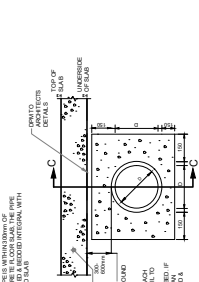

SECTION BB
WHERE DISTANCE BETWEEN PIPE SOFFIT & UNDERSIDE OF CONCRETE GROUND BEAM IS GREATER THAN 300mm

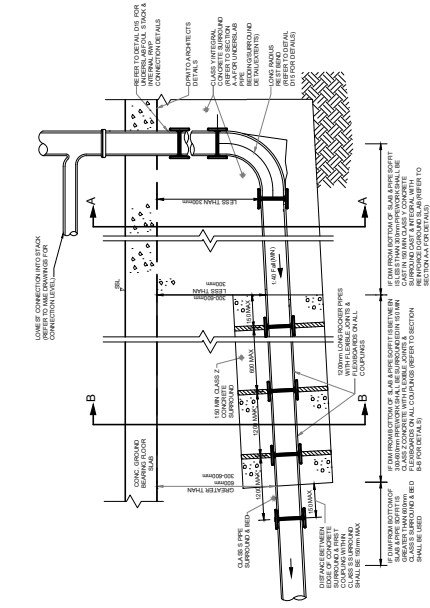

SECTION CC
TYPICAL UNDERSLAB PIPE BEDDING DETAILS FOR PIPEWORK UNDER GROUND BEARING SLAB (FOR ALL UNDER SLAB PIPE DEPTHS)

CONTROL MANHOLE NOTES

ALL DIMENSIONS ARE IN MILLIMETERS

1. ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE STATED

2. ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE STATED

3. ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE STATED

4. ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE STATED

5. ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE STATED


6. ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE STATED

7. ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE STATED


8. ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE STATED

9. ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE STATED

10. ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE STATED

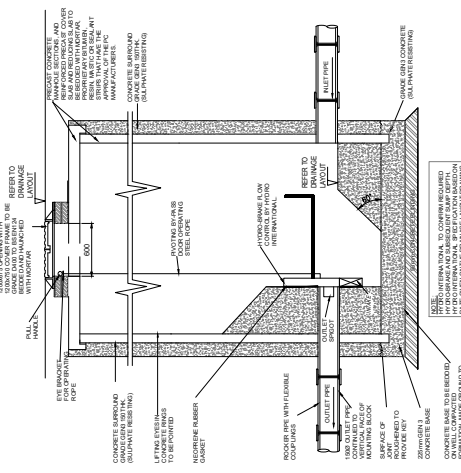

FLOW CONTROL MANHOLE DETAIL

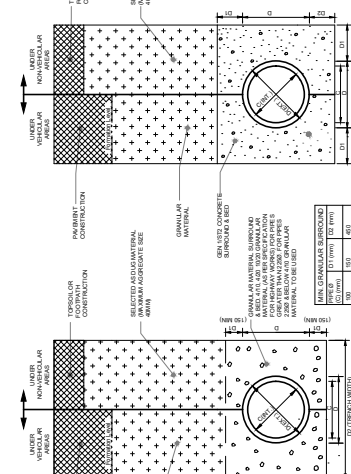

CLASS S PIPE BEDDING & SURROUND (TO BE USED FOR PLASTIC, VITRIFIED CLAY & CONCRETE PIPEWORK)



CLASS Z PIPE BEDDING & SURROUND (TO BE USED FOR PLASTIC, VITRIFIED CLAY & CONCRETE PIPEWORK)



Client:	Watson Construction Ltd
Project:	Levenshulme Road Gorton
Title:	Below Ground Drainage Details Sheet 2
Drawing Status:	Preliminary
Date Created:	May '23
Drawing Scale:	N.T.S
Project Number:	22-2365 / A1 / 105
Project Leader:	MS
Initial Review:	LS

PI	Preliminary Issue	MUS	04.05.23
rev	amendments	by	date

Appendix H

Surface Water Network / Management Calculations

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

STORM SEWER DESIGN by the Modified Rational Method

Design Criteria for Storm

Pipe Sizes STANDARD Manhole Sizes STANDARD

FEH Rainfall Model	
Return Period (years)	30
FEH Rainfall Version	2013
Site Location GB 388687 395445 SJ 88687 95445	
Data Type	Point
Maximum Rainfall (mm/hr)	0
Maximum Time of Concentration (mins)	30
Foul Sewage (l/s/ha)	0.000
Volumetric Runoff Coeff.	0.750
PIMP (%)	100
Add Flow / Climate Change (%)	40
Minimum Backdrop Height (m)	0.000
Maximum Backdrop Height (m)	0.000
Min Design Depth for Optimisation (m)	1.200
Min Vel for Auto Design only (m/s)	1.00
Min Slope for Optimisation (1:X)	500

Designed with Level Soffits

Time Area Diagram for Storm

Time (mins)	Area (ha)	Time (mins)	Area (ha)
0-4	0.236	4-8	0.064

Total Area Contributing (ha) = 0.300

Total Pipe Volume (m³) = 17.308

Network Design Table for Storm

PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)	Section Type	Auto Design
----	---------------	-------------	----------------	----------------	----------------	--------------------	-----------	-------------	-------------	--------------	----------------

Network Results Table

PN	Rain (mm/hr)	T.C. (mins)	US/IL E (m)	I.Area (ha)	E Base Flow (l/s)	Foul (l/s)	Add Flow (l/s)	Vel (m/s)	Cap (l/s)	Flow (l/s)
----	-----------------	----------------	----------------	----------------	----------------------	---------------	-------------------	--------------	--------------	---------------

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Network Design Table for Storm

PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)	Section Type	Auto Design
1.000	9.400	0.120	78.3	0.007	5.00	0.0	0.600	o	150	Pipe/Conduit	
1.001	11.000	0.140	78.6	0.002	0.00	0.0	0.600	o	150	Pipe/Conduit	
2.000	9.400	0.260	36.2	0.007	5.00	0.0	0.600	o	150	Pipe/Conduit	
1.002	16.200	0.200	81.0	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit	
3.000	9.500	0.810	11.7	0.007	5.00	0.0	0.600	o	150	Pipe/Conduit	
1.003	14.800	0.185	80.0	0.003	0.00	0.0	0.600	o	150	Pipe/Conduit	
4.000	9.500	0.315	30.2	0.009	5.00	0.0	0.600	o	150	Pipe/Conduit	
5.000	9.500	0.125	76.0	0.007	5.00	0.0	0.600	o	150	Pipe/Conduit	
5.001	14.750	0.720	20.5	0.003	0.00	0.0	0.600	o	150	Pipe/Conduit	
1.004	6.250	0.080	78.1	0.007	0.00	0.0	0.600	o	150	Pipe/Conduit	
6.000	31.550	0.210	150.2	0.038	5.00	0.0	0.600	o	375	Pipe/Conduit	

Network Results Table

PN	Rain (mm/hr)	T.C. (mins)	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Foul (l/s)	Add Flow (l/s)	Vel (m/s)	Cap (l/s)	Flow (l/s)
1.000	0.00	5.14	65.600	0.007	0.0	0.0	0.0	1.14	20.1	0.0
1.001	0.00	5.30	65.480	0.009	0.0	0.0	0.0	1.14	20.1	0.0
2.000	0.00	5.09	65.600	0.007	0.0	0.0	0.0	1.68	29.7	0.0
1.002	0.00	5.54	65.340	0.016	0.0	0.0	0.0	1.12	19.8	0.0
3.000	0.00	5.05	65.950	0.007	0.0	0.0	0.0	2.96	52.3	0.0
1.003	0.00	5.76	65.140	0.026	0.0	0.0	0.0	1.12	19.9	0.0
4.000	0.00	5.09	65.270	0.009	0.0	0.0	0.0	1.84	32.5	0.0
5.000	0.00	5.14	65.800	0.007	0.0	0.0	0.0	1.15	20.4	0.0
5.001	0.00	5.25	65.675	0.010	0.0	0.0	0.0	2.24	39.5	0.0
1.004	0.00	5.85	64.955	0.052	0.0	0.0	0.0	1.14	20.1	0.0
6.000	0.00	5.36	64.860	0.038	0.0	0.0	0.0	1.48	163.0	0.0

Flo Consult UK Ltd		Page 3
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Network Design Table for Storm

PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)	Section Type	Auto Design
1.005	18.200	0.120	151.7	0.021	0.00	0.0	0.600	o	375	Pipe/Conduit	
7.000	15.700	0.195	80.5	0.009	5.00	0.0	0.600	o	150	Pipe/Conduit	
7.001	17.900	0.580	30.9	0.009	0.00	0.0	0.600	o	150	Pipe/Conduit	
7.002	5.550	0.070	79.3	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit	
1.006	16.950	0.115	147.4	0.021	0.00	0.0	0.600	o	375	Pipe/Conduit	
1.007	4.550	0.135	33.7	0.007	0.00	0.0	0.600	o	375	Pipe/Conduit	
8.000	19.800	0.250	79.2	0.013	5.00	0.0	0.600	o	150	Pipe/Conduit	
8.001	14.700	0.530	27.7	0.013	0.00	0.0	0.600	o	150	Pipe/Conduit	
8.002	17.500	0.115	152.2	0.030	0.00	0.0	0.600	o	375	Pipe/Conduit	
8.003	14.350	0.095	151.1	0.009	0.00	0.0	0.600	o	375	Pipe/Conduit	
9.000	19.900	0.250	79.6	0.016	5.00	0.0	0.600	o	150	Pipe/Conduit	
9.001	3.400	0.040	85.0	0.017	0.00	0.0	0.600	o	150	Pipe/Conduit	
8.004	16.050	0.105	152.9	0.031	0.00	0.0	0.600	o	375	Pipe/Conduit	

Network Results Table

PN	Rain (mm/hr)	T.C. (mins)	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Foul (l/s)	Add Flow (l/s)	Vel (m/s)	Cap (l/s)	Flow (l/s)
1.005	0.00	6.06	64.650	0.111	0.0	0.0	0.0	1.47	162.2	0.0
7.000	0.00	5.23	65.600	0.009	0.0	0.0	0.0	1.12	19.8	0.0
7.001	0.00	5.40	65.405	0.018	0.0	0.0	0.0	1.82	32.1	0.0
7.002	0.00	5.48	64.825	0.018	0.0	0.0	0.0	1.13	20.0	0.0
1.006	0.00	6.25	64.530	0.150	0.0	0.0	0.0	1.49	164.6	0.0
1.007	0.00	6.27	64.415	0.157	0.0	0.0	0.0	3.13	345.7	0.0
8.000	0.00	5.29	65.600	0.013	0.0	0.0	0.0	1.13	20.0	0.0
8.001	0.00	5.42	65.350	0.026	0.0	0.0	0.0	1.92	33.9	0.0
8.002	0.00	5.62	64.595	0.056	0.0	0.0	0.0	1.47	162.0	0.0
8.003	0.00	5.78	64.480	0.065	0.0	0.0	0.0	1.47	162.6	0.0
9.000	0.00	5.29	64.900	0.016	0.0	0.0	0.0	1.13	19.9	0.0
9.001	0.00	5.35	64.650	0.033	0.0	0.0	0.0	1.09	19.3	0.0
8.004	0.00	5.96	64.385	0.129	0.0	0.0	0.0	1.46	161.6	0.0

Flo Consult UK Ltd		Page 4
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Network Design Table for Storm

PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)	Section Type	Auto Design
1.008	3.000	0.020	150.0	0.014	0.00	0.0	0.600	o	375	Pipe/Conduit	
1.009	8.750	0.410	21.3	0.000	0.00	0.0	0.600	o	150	Pipe/Conduit	

Network Results Table

PN	Rain (mm/hr)	T.C. (mins)	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Foul (l/s)	Add Flow (l/s)	Vel (m/s)	Cap (l/s)	Flow (l/s)
1.008	0.00	6.31	64.280	0.300	0.0	0.0	0.0	1.48	163.1	0.0
1.009	0.00	6.37	64.260	0.300	0.0	0.0	0.0	2.19	38.7	0.0

Flo Consult UK Ltd										Page 5	
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ					Levenshulme Road Surface Water Network Calculations						
Date 09/09/2024					Designed by MDS						
File SW Network Calcualtions ...					Checked by MDS						
Innovyze Network 2020.1.3											
Manhole Schedules for Storm											
MH Name	MH CL (m)	MH Depth (m)	MH Connection	MH Diam., L*W (mm)	Pipe Out PN	Pipe Out Invert Level (m)	Pipe Out Diameter (mm)	Pipes In PN	Pipes In Invert Level (m)	Pipes In Diameter (mm)	Backdrop (mm)
S1	66.350	0.750	Open Manhole	150	1.000	65.600	150				
S2	66.350	0.870	Open Manhole	460	1.001	65.480	150	1.000	65.480	150	
S3	66.350	0.750	Open Manhole	150	2.000	65.600	150				
S4	66.350	1.010	Open Manhole	460	1.002	65.340	150	1.001	65.340	150	
								2.000	65.340	150	
S5	66.700	0.750	Open Manhole	150	3.000	65.950	150				
S6	66.700	1.560	Open Manhole	460	1.003	65.140	150	1.002	65.140	150	
								3.000	65.140	150	
S7	66.625	1.355	Open Manhole	150	4.000	65.270	150				
S8	66.550	0.750	Open Manhole	460	5.000	65.800	150				
S9	66.550	0.875	Open Manhole	460	5.001	65.675	150	5.000	65.675	150	
S10	66.550	1.595	Open Manhole	1500	1.004	64.955	150	1.003	64.955	150	
								4.000	64.955	150	
								5.001	64.955	150	
S11	66.250	1.390	Open Manhole	1500	6.000	64.860	375				
S12	66.550	1.900	Open Manhole	1500	1.005	64.650	375	1.004	64.875	150	
								6.000	64.650	375	
S13	66.350	0.750	Open Manhole	460	7.000	65.600	150				
S14	66.350	0.945	Open Manhole	460	7.001	65.405	150	7.000	65.405	150	
S15	66.850	2.025	Open Manhole	460	7.002	64.825	150	7.001	64.825	150	
JCT	66.550	2.020	Junction		1.006	64.530	375	1.005	64.530	375	
								7.002	64.755	150	
S16	66.750	2.335	Open Manhole	1500	1.007	64.415	375	1.006	64.415	375	
S17	66.350	0.750	Open Manhole	460	8.000	65.600	150				
S18	66.350	1.000	Open Manhole	460	8.001	65.350	150	8.000	65.350	150	
S19	66.250	1.655	Open Manhole	1500	8.002	64.595	375	8.001	64.820	150	
S20	66.300	1.820	Open Manhole	1500	8.003	64.480	375	8.002	64.480	375	
S21	66.350	1.450	Open Manhole	460	9.000	64.900	150				
S22	66.350	1.700	Open Manhole	460	9.001	64.650	150	9.000	64.650	150	
S23	66.400	2.015	Open Manhole	1500	8.004	64.385	375	8.003	64.385	375	
								9.001	64.610	150	
S24	66.750	2.470	Open Manhole	1500	1.008	64.280	375	1.007	64.280	375	
								8.004	64.280	375	
©1982-2020 Innovyze											

Flo Consult UK Ltd		Page 7
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calculations ...	Designed by MDS Checked by MDS	
Innovyze	Network 2020.1.3	

PIPELINE SCHEDULES for Storm

Upstream Manhole

PN	Hyd Sect	Diam (mm)	MH Name	C.Level (m)	I.Level (m)	D.Depth (m)	MH Connection	MH DIAM., L*W (mm)
1.000	o	150	S1	66.350	65.600	0.600	Open Manhole	150
1.001	o	150	S2	66.350	65.480	0.720	Open Manhole	460
2.000	o	150	S3	66.350	65.600	0.600	Open Manhole	150
1.002	o	150	S4	66.350	65.340	0.860	Open Manhole	460
3.000	o	150	S5	66.700	65.950	0.600	Open Manhole	150
1.003	o	150	S6	66.700	65.140	1.410	Open Manhole	460
4.000	o	150	S7	66.625	65.270	1.205	Open Manhole	150
5.000	o	150	S8	66.550	65.800	0.600	Open Manhole	460
5.001	o	150	S9	66.550	65.675	0.725	Open Manhole	460
1.004	o	150	S10	66.550	64.955	1.445	Open Manhole	1500

Downstream Manhole

PN	Length (m)	Slope (1:X)	MH Name	C.Level (m)	I.Level (m)	D.Depth (m)	MH Connection	MH DIAM., L*W (mm)
1.000	9.400	78.3	S2	66.350	65.480	0.720	Open Manhole	460
1.001	11.000	78.6	S4	66.350	65.340	0.860	Open Manhole	460
2.000	9.400	36.2	S4	66.350	65.340	0.860	Open Manhole	460
1.002	16.200	81.0	S6	66.700	65.140	1.410	Open Manhole	460
3.000	9.500	11.7	S6	66.700	65.140	1.410	Open Manhole	460
1.003	14.800	80.0	S10	66.550	64.955	1.445	Open Manhole	1500
4.000	9.500	30.2	S10	66.550	64.955	1.445	Open Manhole	1500
5.000	9.500	76.0	S9	66.550	65.675	0.725	Open Manhole	460
5.001	14.750	20.5	S10	66.550	64.955	1.445	Open Manhole	1500
1.004	6.250	78.1	S12	66.550	64.875	1.525	Open Manhole	1500

Flo Consult UK Ltd		Page 8
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calculations ...	Designed by MDS Checked by MDS	
Innovyze	Network 2020.1.3	

PIPELINE SCHEDULES for Storm

Upstream Manhole

PN	Hyd Sect	Diam (mm)	MH Name	C.Level (m)	I.Level (m)	D.Depth (m)	MH Connection	MH DIAM., L*W (mm)
6.000	o	375	S11	66.250	64.860	1.015	Open Manhole	1500
1.005	o	375	S12	66.550	64.650	1.525	Open Manhole	1500
7.000	o	150	S13	66.350	65.600	0.600	Open Manhole	460
7.001	o	150	S14	66.350	65.405	0.795	Open Manhole	460
7.002	o	150	S15	66.850	64.825	1.875	Open Manhole	460
1.006	o	375	JCT	66.550	64.530	1.645	Junction	
1.007	o	375	S16	66.750	64.415	1.960	Open Manhole	1500
8.000	o	150	S17	66.350	65.600	0.600	Open Manhole	460
8.001	o	150	S18	66.350	65.350	0.850	Open Manhole	460
8.002	o	375	S19	66.250	64.595	1.280	Open Manhole	1500
8.003	o	375	S20	66.300	64.480	1.445	Open Manhole	1500
9.000	o	150	S21	66.350	64.900	1.300	Open Manhole	460
9.001	o	150	S22	66.350	64.650	1.550	Open Manhole	460

Downstream Manhole

PN	Length (m)	Slope (1:X)	MH Name	C.Level (m)	I.Level (m)	D.Depth (m)	MH Connection	MH DIAM., L*W (mm)
6.000	31.550	150.2	S12	66.550	64.650	1.525	Open Manhole	1500
1.005	18.200	151.7	JCT	66.550	64.530	1.645	Junction	
7.000	15.700	80.5	S14	66.350	65.405	0.795	Open Manhole	460
7.001	17.900	30.9	S15	66.850	64.825	1.875	Open Manhole	460
7.002	5.550	79.3	JCT	66.550	64.755	1.645	Junction	
1.006	16.950	147.4	S16	66.750	64.415	1.960	Open Manhole	1500
1.007	4.550	33.7	S24	66.750	64.280	2.095	Open Manhole	1500
8.000	19.800	79.2	S18	66.350	65.350	0.850	Open Manhole	460
8.001	14.700	27.7	S19	66.250	64.820	1.280	Open Manhole	1500
8.002	17.500	152.2	S20	66.300	64.480	1.445	Open Manhole	1500
8.003	14.350	151.1	S23	66.400	64.385	1.640	Open Manhole	1500
9.000	19.900	79.6	S22	66.350	64.650	1.550	Open Manhole	460
9.001	3.400	85.0	S23	66.400	64.610	1.640	Open Manhole	1500

Flo Consult UK Ltd		Page 9	
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ		Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calculations ...		Designed by MDS Checked by MDS	
Innovyze		Network 2020.1.3	

PIPELINE SCHEDULES for Storm

Upstream Manhole

PN	Hyd	Diam	MH	C.Level	I.Level	D.Depth	MH	MH DIAM., L*W
	Sect	(mm)	Name	(m)	(m)	(m)	Connection	(mm)
8.004	o	375	S23	66.400	64.385	1.640	Open Manhole	1500
1.008	o	375	S24	66.750	64.280	2.095	Open Manhole	1500
1.009	o	150	S25/FC	66.200	64.260	1.790	Open Manhole	1500

Downstream Manhole

PN	Length	Slope	MH	C.Level	I.Level	D.Depth	MH	MH DIAM., L*W
	(m)	(1:X)	Name	(m)	(m)	(m)	Connection	(mm)
8.004	16.050	152.9	S24	66.750	64.280	2.095	Open Manhole	1500
1.008	3.000	150.0	S25/FC	66.200	64.260	1.565	Open Manhole	1500
1.009	8.750	21.3	S26	65.560	63.850	1.750	Open Manhole	1500

Free Flowing Outfall Details for Storm

Outfall	Outfall	C. Level	I. Level	Min	D,L	W
Pipe Number	Name	(m)	(m)	I. Level (m)	(mm)	(mm)
1.009	S26	65.750	63.850	0.000	1500	0

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	0.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coefficient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	1

Number of Input Hydrographs 0 Number of Offline Controls 0 Number of Time/Area Diagrams 0
Number of Online Controls 1 Number of Storage Structures 1 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model FEH

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 10
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze	Network 2020.1.3	

Synthetic Rainfall Details

Return Period (years)	2
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	15

Flo Consult UK Ltd		Page 11
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Online Controls for Storm

Hydro-Brake® Optimum Manhole: S25/FC, DS/PN: 1.009, Volume (m³): 3.6

Unit Reference	MD-SHE-0103-5000-1200-5000
Design Head (m)	1.200
Design Flow (l/s)	5.0
Flush-Flo™	Calculated
Objective	Minimise upstream storage
Application	Surface
Sump Available	Yes
Diameter (mm)	103
Invert Level (m)	64.260
Minimum Outlet Pipe Diameter (mm)	150
Suggested Manhole Diameter (mm)	1200

Control Points	Head (m)	Flow (l/s)	Control Points	Head (m)	Flow (l/s)
Design Point (Calculated)	1.200	5.0	Kick-Flo®	0.745	4.0
Flush-Flo™	0.354	5.0	Mean Flow over Head Range	-	4.4

The hydrological calculations have been based on the Head/Discharge relationship for the Hydro-Brake® Optimum as specified. Should another type of control device other than a Hydro-Brake Optimum® be utilised then these storage routing calculations will be invalidated

Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)
0.100	3.4	1.200	5.0	3.000	7.7	7.000	11.5
0.200	4.7	1.400	5.4	3.500	8.3	7.500	11.8
0.300	5.0	1.600	5.7	4.000	8.8	8.000	12.2
0.400	5.0	1.800	6.0	4.500	9.3	8.500	12.6
0.500	4.9	2.000	6.3	5.000	9.8	9.000	12.9
0.600	4.7	2.200	6.6	5.500	10.2	9.500	13.3
0.800	4.1	2.400	6.9	6.000	10.7		
1.000	4.6	2.600	7.2	6.500	11.1		

Flo Consult UK Ltd		Page 12																																																																																				
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations																																																																																					
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS																																																																																					
Innovyze	Network 2020.1.3																																																																																					
<u>Storage Structures for Storm</u> <u>Cellular Storage Manhole: S25/FC, DS/PN: 1.009</u> Invert Level (m) 64.270 Safety Factor 2.0 Infiltration Coefficient Base (m/hr) 0.00000 Porosity 0.95 Infiltration Coefficient Side (m/hr) 0.00000 <table><tr><th>Depth (m)</th><th>Area (m²)</th><th>Inf. Area (m²)</th><th>Depth (m)</th><th>Area (m²)</th><th>Inf. Area (m²)</th></tr><tr><td>0.000</td><td>170.0</td><td>0.0</td><td>1.300</td><td>0.0</td><td>0.0</td></tr><tr><td>0.100</td><td>170.0</td><td>0.0</td><td>1.400</td><td>0.0</td><td>0.0</td></tr><tr><td>0.200</td><td>170.0</td><td>0.0</td><td>1.500</td><td>0.0</td><td>0.0</td></tr><tr><td>0.300</td><td>170.0</td><td>0.0</td><td>1.600</td><td>0.0</td><td>0.0</td></tr><tr><td>0.400</td><td>170.0</td><td>0.0</td><td>1.700</td><td>0.0</td><td>0.0</td></tr><tr><td>0.500</td><td>170.0</td><td>0.0</td><td>1.800</td><td>0.0</td><td>0.0</td></tr><tr><td>0.600</td><td>170.0</td><td>0.0</td><td>1.900</td><td>0.0</td><td>0.0</td></tr><tr><td>0.700</td><td>170.0</td><td>0.0</td><td>2.000</td><td>0.0</td><td>0.0</td></tr><tr><td>0.800</td><td>170.0</td><td>0.0</td><td>2.100</td><td>0.0</td><td>0.0</td></tr><tr><td>0.900</td><td>170.0</td><td>0.0</td><td>2.200</td><td>0.0</td><td>0.0</td></tr><tr><td>1.000</td><td>170.0</td><td>0.0</td><td>2.300</td><td>0.0</td><td>0.0</td></tr><tr><td>1.100</td><td>170.0</td><td>0.0</td><td>2.400</td><td>0.0</td><td>0.0</td></tr><tr><td>1.200</td><td>0.0</td><td>0.0</td><td>2.500</td><td>0.0</td><td>0.0</td></tr></table>			Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	0.000	170.0	0.0	1.300	0.0	0.0	0.100	170.0	0.0	1.400	0.0	0.0	0.200	170.0	0.0	1.500	0.0	0.0	0.300	170.0	0.0	1.600	0.0	0.0	0.400	170.0	0.0	1.700	0.0	0.0	0.500	170.0	0.0	1.800	0.0	0.0	0.600	170.0	0.0	1.900	0.0	0.0	0.700	170.0	0.0	2.000	0.0	0.0	0.800	170.0	0.0	2.100	0.0	0.0	0.900	170.0	0.0	2.200	0.0	0.0	1.000	170.0	0.0	2.300	0.0	0.0	1.100	170.0	0.0	2.400	0.0	0.0	1.200	0.0	0.0	2.500	0.0	0.0
Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)																																																																																	
0.000	170.0	0.0	1.300	0.0	0.0																																																																																	
0.100	170.0	0.0	1.400	0.0	0.0																																																																																	
0.200	170.0	0.0	1.500	0.0	0.0																																																																																	
0.300	170.0	0.0	1.600	0.0	0.0																																																																																	
0.400	170.0	0.0	1.700	0.0	0.0																																																																																	
0.500	170.0	0.0	1.800	0.0	0.0																																																																																	
0.600	170.0	0.0	1.900	0.0	0.0																																																																																	
0.700	170.0	0.0	2.000	0.0	0.0																																																																																	
0.800	170.0	0.0	2.100	0.0	0.0																																																																																	
0.900	170.0	0.0	2.200	0.0	0.0																																																																																	
1.000	170.0	0.0	2.300	0.0	0.0																																																																																	
1.100	170.0	0.0	2.400	0.0	0.0																																																																																	
1.200	0.0	0.0	2.500	0.0	0.0																																																																																	
©1982-2020 Innovyze																																																																																						

Flo Consult UK Ltd		Page 13
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Volume Summary (Static)

Length Calculations based on Centre-Centre

Pipe Number	USMH Name	Manhole Volume (m³)	Pipe Volume (m³)	Storage Structure Volume (m³)	Total Volume (m³)
1.000	S1	0.013	0.166	0.000	0.179
1.001	S2	0.145	0.194	0.000	0.339
2.000	S3	0.013	0.166	0.000	0.179
1.002	S4	0.168	0.286	0.000	0.454
3.000	S5	0.013	0.168	0.000	0.181
1.003	S6	0.259	0.262	0.000	0.521
4.000	S7	0.024	0.168	0.000	0.192
5.000	S8	0.125	0.168	0.000	0.293
5.001	S9	0.145	0.261	0.000	0.406
1.004	S10	2.819	0.110	0.000	2.929
6.000	S11	2.456	3.485	0.000	5.941
1.005	S12	3.358	2.010	0.000	5.368
7.000	S13	0.125	0.277	0.000	0.402
7.001	S14	0.157	0.316	0.000	0.473
7.002	S15	0.337	0.098	0.000	0.435
1.006	JCT	0.000	1.872	0.000	1.872
1.007	S16	4.126	0.503	0.000	4.629
8.000	S17	0.125	0.350	0.000	0.475
8.001	S18	0.166	0.260	0.000	0.426
8.002	S19	2.925	1.933	0.000	4.857
8.003	S20	3.216	1.585	0.000	4.801
9.000	S21	0.241	0.352	0.000	0.593
9.001	S22	0.283	0.060	0.000	0.343
8.004	S23	3.561	1.773	0.000	5.333
1.008	S24	4.365	0.331	0.000	4.696
1.009	S25/FC	3.428	0.155	183.033	186.616
Total		32.592	17.308	183.033	232.933

Flo Consult UK Ltd		Page 14
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Volume Summary (Static)

Length Calculations based on True Length

Pipe Number	USMH Name	Manhole Volume (m³)	Pipe Volume (m³)	Storage Structure Volume (m³)	Total Volume (m³)
1.000	S1	0.013	0.161	0.000	0.174
1.001	S2	0.145	0.186	0.000	0.331
2.000	S3	0.013	0.161	0.000	0.174
1.002	S4	0.168	0.278	0.000	0.446
3.000	S5	0.013	0.162	0.000	0.176
1.003	S6	0.259	0.244	0.000	0.503
4.000	S7	0.024	0.153	0.000	0.177
5.000	S8	0.125	0.160	0.000	0.284
5.001	S9	0.145	0.243	0.000	0.389
1.004	S10	2.819	0.084	0.000	2.903
6.000	S11	2.456	3.319	0.000	5.775
1.005	S12	3.358	1.927	0.000	5.285
7.000	S13	0.125	0.269	0.000	0.394
7.001	S14	0.157	0.308	0.000	0.465
7.002	S15	0.337	0.094	0.000	0.431
1.006	JCT	0.000	1.789	0.000	1.789
1.007	S16	4.126	0.337	0.000	4.463
8.000	S17	0.125	0.342	0.000	0.466
8.001	S18	0.166	0.242	0.000	0.409
8.002	S19	2.925	1.767	0.000	4.692
8.003	S20	3.216	1.419	0.000	4.635
9.000	S21	0.241	0.344	0.000	0.585
9.001	S22	0.283	0.043	0.000	0.325
8.004	S23	3.561	1.607	0.000	5.168
1.008	S24	4.365	0.166	0.000	4.531
1.009	S25/FC	3.428	0.128	183.033	186.590
Total		32.592	15.934	183.033	231.559

Flo Consult UK Ltd		Page 15
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 15 minute 2 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
 Analysis Timestep Fine Inertia Status OFF
 DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded	Flow / Cap.	Overflow (l/s)	Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m³)			Time (mins)	Flow (l/s)	
1.000	S1	65.626	-0.124	0.000	0.07			1.2	OK
1.001	S2	65.509	-0.121	0.000	0.08			1.5	OK
2.000	S3	65.621	-0.129	0.000	0.05			1.2	OK
1.002	S4	65.378	-0.112	0.000	0.15			2.7	OK
3.000	S5	65.966	-0.134	0.000	0.03			1.2	OK
1.003	S6	65.190	-0.100	0.000	0.23			4.3	OK
4.000	S7	65.292	-0.128	0.000	0.05			1.6	OK
5.000	S8	65.825	-0.125	0.000	0.07			1.2	OK
5.001	S9	65.695	-0.130	0.000	0.04			1.6	OK
1.004	S10	65.031	-0.074	0.000	0.50			8.5	OK
6.000	S11	64.911	-0.324	0.000	0.04			6.4	OK
1.005	S12	64.741	-0.284	0.000	0.13			18.0	OK
7.000	S13	65.629	-0.121	0.000	0.08			1.5	OK
7.001	S14	65.436	-0.119	0.000	0.09			2.8	OK
7.002	S15	64.867	-0.108	0.000	0.17			2.8	OK
1.006	JCT	64.636	-0.269	0.000	0.18			23.8	OK*
1.007	S16	64.519	-0.271	0.000	0.17			24.6	OK
8.000	S17	65.634	-0.116	0.000	0.12			2.2	OK
8.001	S18	65.386	-0.114	0.000	0.13			4.1	OK
8.002	S19	64.657	-0.313	0.000	0.06			8.4	OK
8.003	S20	64.551	-0.304	0.000	0.08			9.8	OK
9.000	S21	64.938	-0.112	0.000	0.15			2.7	OK
9.001	S22	64.718	-0.082	0.000	0.41			5.2	OK
8.004	S23	64.504	-0.256	0.000	0.15			19.0	OK
1.008	S24	64.479	-0.176	0.000	0.55			45.6	OK
1.009	S25/FC	64.397	-0.013	0.000	0.13		56	4.3	OK

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze		Network 2020.1.3

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	0.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	1

Number of Input Hydrographs 0 Number of Offline Controls 0 Number of Time/Area Diagrams 0
Number of Online Controls 1 Number of Storage Structures 1 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	2
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	30

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 30 minute 2 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
 Analysis Timestep Fine Inertia Status OFF
 DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded	Flow / Overflow		Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m ³)			Time (mins)	Flow (l/s)	
1.000	S1	65.622	-0.128	0.000	0.05			0.9	OK
1.001	S2	65.505	-0.125	0.000	0.07			1.2	OK
2.000	S3	65.618	-0.132	0.000	0.04			0.9	OK
1.002	S4	65.374	-0.116	0.000	0.12			2.1	OK
3.000	S5	65.964	-0.136	0.000	0.02			0.9	OK
1.003	S6	65.184	-0.106	0.000	0.19			3.4	OK
4.000	S7	65.290	-0.130	0.000	0.04			1.2	OK
5.000	S8	65.822	-0.128	0.000	0.05			0.9	OK
5.001	S9	65.693	-0.132	0.000	0.04			1.3	OK
1.004	S10	65.021	-0.084	0.000	0.40			6.7	OK
6.000	S11	64.905	-0.330	0.000	0.03			5.0	OK
1.005	S12	64.732	-0.293	0.000	0.11			14.3	OK
7.000	S13	65.625	-0.125	0.000	0.07			1.2	OK
7.001	S14	65.432	-0.123	0.000	0.08			2.3	OK
7.002	S15	64.862	-0.113	0.000	0.14			2.3	OK
1.006	JCT	64.625	-0.280	0.000	0.15			19.3	OK*
1.007	S16	64.508	-0.282	0.000	0.14			20.1	OK
8.000	S17	65.631	-0.119	0.000	0.09			1.7	OK
8.001	S18	65.383	-0.117	0.000	0.11			3.3	OK
8.002	S19	64.650	-0.320	0.000	0.05			7.0	OK
8.003	S20	64.543	-0.312	0.000	0.07			8.1	OK
9.000	S21	64.933	-0.117	0.000	0.11			2.1	OK
9.001	S22	64.710	-0.090	0.000	0.34			4.2	OK
8.004	S23	64.487	-0.273	0.000	0.13			16.0	OK
1.008	S24	64.457	-0.198	0.000	0.45			37.6	OK
1.009	S25/FC	64.425	0.015	0.000	0.13		60	4.5	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze	Network 2020.1.3	

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	0.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	2

Number of Input Hydrographs 0 Number of Offline Controls 0 Number of Time/Area Diagrams 0
Number of Online Controls 1 Number of Storage Structures 1 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	2
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	60

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 60 minute 2 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
 Analysis Timestep Fine Inertia Status OFF
 DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded			Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m ³)	Flow / Cap.	Overflow (l/s)	Time (mins)	Flow (l/s)	
1.000	S1	65.618	-0.132	0.000	0.03			0.6	OK
1.001	S2	65.500	-0.130	0.000	0.04			0.8	OK
2.000	S3	65.616	-0.134	0.000	0.02			0.6	OK
1.002	S4	65.367	-0.123	0.000	0.08			1.4	OK
3.000	S5	65.959	-0.141	0.000	0.01			0.6	OK
1.003	S6	65.175	-0.115	0.000	0.12			2.3	OK
4.000	S7	65.286	-0.134	0.000	0.03			0.8	OK
5.000	S8	65.818	-0.132	0.000	0.03			0.6	OK
5.001	S9	65.691	-0.134	0.000	0.02			0.9	OK
1.004	S10	65.008	-0.097	0.000	0.27			4.5	OK
6.000	S11	64.899	-0.336	0.000	0.02			3.3	OK
1.005	S12	64.716	-0.309	0.000	0.07			9.7	OK
7.000	S13	65.620	-0.130	0.000	0.04			0.8	OK
7.001	S14	65.427	-0.128	0.000	0.05			1.6	OK
7.002	S15	64.856	-0.119	0.000	0.10			1.6	OK
1.006	JCT	64.608	-0.297	0.000	0.10			13.1	OK*
1.007	S16	64.492	-0.298	0.000	0.09			13.7	OK
8.000	S17	65.624	-0.126	0.000	0.06			1.1	OK
8.001	S18	65.376	-0.124	0.000	0.07			2.3	OK
8.002	S19	64.641	-0.329	0.000	0.04			4.8	OK
8.003	S20	64.532	-0.323	0.000	0.05			5.6	OK
9.000	S21	64.927	-0.123	0.000	0.07			1.4	OK
9.001	S22	64.698	-0.102	0.000	0.23			2.9	OK
8.004	S23	64.464	-0.296	0.000	0.09			11.1	OK
1.008	S24	64.444	-0.211	0.000	0.31			25.8	OK
1.009	S25/FC	64.444	0.034	0.000	0.14		66	4.7	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze		Network 2020.1.3

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	0.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	4

Number of Input Hydrographs 0
 Number of Offline Controls 0
 Number of Time/Area Diagrams 0
 Number of Online Controls 1
 Number of Storage Structures 1
 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	2
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	120

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 120 minute 2 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
 Analysis Timestep Fine Inertia Status OFF
 DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded	Flow / Overflow		Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m ³)			Time (mins)	Flow (l/s)	
1.000	S1	65.615	-0.135	0.000	0.02			0.4	OK
1.001	S2	65.497	-0.133	0.000	0.03			0.5	OK
2.000	S3	65.611	-0.139	0.000	0.02			0.4	OK
1.002	S4	65.362	-0.128	0.000	0.05			0.9	OK
3.000	S5	65.956	-0.144	0.000	0.01			0.4	OK
1.003	S6	65.169	-0.121	0.000	0.08			1.5	OK
4.000	S7	65.283	-0.137	0.000	0.02			0.5	OK
5.000	S8	65.815	-0.135	0.000	0.02			0.4	OK
5.001	S9	65.686	-0.139	0.000	0.02			0.6	OK
1.004	S10	64.998	-0.107	0.000	0.18			3.0	OK
6.000	S11	64.887	-0.348	0.000	0.02			2.2	OK
1.005	S12	64.703	-0.322	0.000	0.05			6.5	OK
7.000	S13	65.617	-0.133	0.000	0.03			0.5	OK
7.001	S14	65.423	-0.132	0.000	0.04			1.1	OK
7.002	S15	64.850	-0.125	0.000	0.06			1.0	OK
1.006	JCT	64.593	-0.312	0.000	0.07			8.7	OK*
1.007	S16	64.476	-0.314	0.000	0.06			9.1	OK
8.000	S17	65.619	-0.131	0.000	0.04			0.8	OK
8.001	S18	65.371	-0.129	0.000	0.05			1.5	OK
8.002	S19	64.634	-0.336	0.000	0.02			3.3	OK
8.003	S20	64.523	-0.332	0.000	0.03			3.8	OK
9.000	S21	64.921	-0.129	0.000	0.05			0.9	OK
9.001	S22	64.689	-0.111	0.000	0.15			1.9	OK
8.004	S23	64.463	-0.297	0.000	0.06			7.5	OK
1.008	S24	64.461	-0.194	0.000	0.21			17.2	OK
1.009	S25/FC	64.460	0.050	0.000	0.14		88	4.7	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze	Network 2020.1.3	

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	0.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	4

Number of Input Hydrographs 0 Number of Offline Controls 0 Number of Time/Area Diagrams 0
Number of Online Controls 1 Number of Storage Structures 1 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	2
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	240

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 240 minute 2 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
 Analysis Timestep Fine Inertia Status OFF
 DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded	Flow / Overflow		Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m ³)			Time (mins)	Flow (l/s)	
1.000	S1	65.610	-0.140	0.000	0.01			0.3	OK
1.001	S2	65.493	-0.137	0.000	0.02			0.3	OK
2.000	S3	65.607	-0.143	0.000	0.01			0.3	OK
1.002	S4	65.358	-0.132	0.000	0.03			0.6	OK
3.000	S5	65.954	-0.146	0.000	0.01			0.3	OK
1.003	S6	65.162	-0.128	0.000	0.05			1.0	OK
4.000	S7	65.278	-0.142	0.000	0.01			0.3	OK
5.000	S8	65.810	-0.140	0.000	0.01			0.3	OK
5.001	S9	65.682	-0.143	0.000	0.01			0.4	OK
1.004	S10	64.989	-0.116	0.000	0.12			1.9	OK
6.000	S11	64.877	-0.358	0.000	0.01			1.4	OK
1.005	S12	64.693	-0.332	0.000	0.03			4.2	OK
7.000	S13	65.613	-0.137	0.000	0.02			0.3	OK
7.001	S14	65.420	-0.135	0.000	0.02			0.7	OK
7.002	S15	64.844	-0.131	0.000	0.04			0.7	OK
1.006	JCT	64.579	-0.326	0.000	0.04			5.6	OK*
1.007	S16	64.464	-0.326	0.000	0.04			5.9	OK
8.000	S17	65.616	-0.134	0.000	0.03			0.5	OK
8.001	S18	65.367	-0.133	0.000	0.03			1.0	OK
8.002	S19	64.623	-0.347	0.000	0.02			2.1	OK
8.003	S20	64.516	-0.339	0.000	0.02			2.4	OK
9.000	S21	64.917	-0.133	0.000	0.03			0.6	OK
9.001	S22	64.681	-0.119	0.000	0.10			1.2	OK
8.004	S23	64.459	-0.301	0.000	0.04			4.8	OK
1.008	S24	64.457	-0.198	0.000	0.13			10.9	OK
1.009	S25/FC	64.456	0.046	0.000	0.14		108	4.7	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze	Network 2020.1.3	

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	0.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	6

Number of Input Hydrographs 0 Number of Offline Controls 0 Number of Time/Area Diagrams 0
Number of Online Controls 1 Number of Storage Structures 1 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	2
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	360

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 360 minute 2 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
Analysis Timestep Fine Inertia Status OFF
DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded	Flow / Overflow		Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m ³)			Time (mins)	Flow (l/s)	
1.000	S1	65.608	-0.142	0.000	0.01			0.2	OK
1.001	S2	65.490	-0.140	0.000	0.01			0.3	OK
2.000	S3	65.605	-0.145	0.000	0.01			0.2	OK
1.002	S4	65.356	-0.134	0.000	0.02			0.5	OK
3.000	S5	65.953	-0.147	0.000	0.00			0.2	OK
1.003	S6	65.159	-0.131	0.000	0.04			0.7	OK
4.000	S7	65.276	-0.144	0.000	0.01			0.3	OK
5.000	S8	65.808	-0.142	0.000	0.01			0.2	OK
5.001	S9	65.681	-0.144	0.000	0.01			0.3	OK
1.004	S10	64.985	-0.120	0.000	0.09			1.5	OK
6.000	S11	64.873	-0.362	0.000	0.01			1.1	OK
1.005	S12	64.689	-0.336	0.000	0.02			3.2	OK
7.000	S13	65.610	-0.140	0.000	0.01			0.3	OK
7.001	S14	65.417	-0.138	0.000	0.02			0.5	OK
7.002	S15	64.842	-0.133	0.000	0.03			0.5	OK
1.006	JCT	64.574	-0.331	0.000	0.03			4.3	OK*
1.007	S16	64.458	-0.332	0.000	0.03			4.5	OK
8.000	S17	65.614	-0.136	0.000	0.02			0.4	OK
8.001	S18	65.366	-0.134	0.000	0.02			0.7	OK
8.002	S19	64.616	-0.354	0.000	0.01			1.6	OK
8.003	S20	64.507	-0.348	0.000	0.02			1.9	OK
9.000	S21	64.916	-0.134	0.000	0.02			0.5	OK
9.001	S22	64.677	-0.123	0.000	0.08			0.9	OK
8.004	S23	64.443	-0.317	0.000	0.03			3.7	OK
1.008	S24	64.440	-0.215	0.000	0.10			8.4	OK
1.009	S25/FC	64.439	0.029	0.000	0.14		120	4.6	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze		Network 2020.1.3

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	0.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	12

Number of Input Hydrographs 0 Number of Offline Controls 0 Number of Time/Area Diagrams 0
 Number of Online Controls 1 Number of Storage Structures 1 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	2
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	720

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 720 minute 2 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
 Analysis Timestep Fine Inertia Status OFF
 DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded			Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m³)	Flow / Cap.	Overflow (l/s)	Time (mins)	Flow (l/s)	
1.000	S1	65.605	-0.145	0.000	0.01			0.1	OK
1.001	S2	65.486	-0.144	0.000	0.01			0.2	OK
2.000	S3	65.603	-0.147	0.000	0.00			0.1	OK
1.002	S4	65.351	-0.139	0.000	0.02			0.3	OK
3.000	S5	65.952	-0.148	0.000	0.00			0.1	OK
1.003	S6	65.156	-0.134	0.000	0.03			0.5	OK
4.000	S7	65.274	-0.146	0.000	0.01			0.2	OK
5.000	S8	65.805	-0.145	0.000	0.01			0.1	OK
5.001	S9	65.678	-0.147	0.000	0.00			0.2	OK
1.004	S10	64.977	-0.128	0.000	0.05			0.9	OK
6.000	S11	64.868	-0.367	0.000	0.00			0.7	OK
1.005	S12	64.676	-0.349	0.000	0.01			2.0	OK
7.000	S13	65.606	-0.144	0.000	0.01			0.2	OK
7.001	S14	65.413	-0.142	0.000	0.01			0.3	OK
7.002	S15	64.839	-0.136	0.000	0.02			0.3	OK
1.006	JCT	64.566	-0.339	0.000	0.02			2.7	OK*
1.007	S16	64.449	-0.341	0.000	0.02			2.8	OK
8.000	S17	65.609	-0.141	0.000	0.01			0.2	OK
8.001	S18	65.361	-0.139	0.000	0.01			0.5	OK
8.002	S19	64.608	-0.362	0.000	0.01			1.0	OK
8.003	S20	64.497	-0.358	0.000	0.01			1.2	OK
9.000	S21	64.911	-0.139	0.000	0.02			0.3	OK
9.001	S22	64.671	-0.129	0.000	0.05			0.6	OK
8.004	S23	64.422	-0.338	0.000	0.02			2.3	OK
1.008	S24	64.391	-0.264	0.000	0.06			5.3	OK
1.009	S25/FC	64.391	-0.019	0.000	0.13		168	4.3	OK

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze		Network 2020.1.3

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	0.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	24

Number of Input Hydrographs 0
 Number of Offline Controls 0
 Number of Time/Area Diagrams 0
 Number of Online Controls 1
 Number of Storage Structures 1
 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	2
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	1440

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 1440 minute 2 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
 Analysis Timestep Fine Inertia Status OFF
 DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded			Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m³)	Flow / Cap.	Overflow (l/s)	Time (mins)	Flow (l/s)	
1.000	S1	65.603	-0.147	0.000	0.00			0.1	OK
1.001	S2	65.484	-0.146	0.000	0.01			0.1	OK
2.000	S3	65.602	-0.148	0.000	0.00			0.1	OK
1.002	S4	65.347	-0.143	0.000	0.01			0.2	OK
3.000	S5	65.951	-0.149	0.000	0.00			0.1	OK
1.003	S6	65.151	-0.139	0.000	0.02			0.3	OK
4.000	S7	65.272	-0.148	0.000	0.00			0.1	OK
5.000	S8	65.803	-0.147	0.000	0.00			0.1	OK
5.001	S9	65.677	-0.148	0.000	0.00			0.1	OK
1.004	S10	64.973	-0.132	0.000	0.03			0.6	OK
6.000	S11	64.865	-0.370	0.000	0.00			0.4	OK
1.005	S12	64.666	-0.359	0.000	0.01			1.2	OK
7.000	S13	65.604	-0.146	0.000	0.01			0.1	OK
7.001	S14	65.410	-0.145	0.000	0.01			0.2	OK
7.002	S15	64.834	-0.141	0.000	0.01			0.2	OK
1.006	JCT	64.552	-0.353	0.000	0.01			1.7	OK*
1.007	S16	64.436	-0.354	0.000	0.01			1.7	OK
8.000	S17	65.605	-0.145	0.000	0.01			0.1	OK
8.001	S18	65.357	-0.143	0.000	0.01			0.3	OK
8.002	S19	64.603	-0.367	0.000	0.00			0.6	OK
8.003	S20	64.491	-0.364	0.000	0.01			0.7	OK
9.000	S21	64.907	-0.143	0.000	0.01			0.2	OK
9.001	S22	64.667	-0.133	0.000	0.03			0.4	OK
8.004	S23	64.405	-0.355	0.000	0.01			1.4	OK
1.008	S24	64.354	-0.301	0.000	0.04			3.3	OK
1.009	S25/FC	64.352	-0.058	0.000	0.09		336	3.1	OK

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze		Network 2020.1.3

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	40.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	1

Number of Input Hydrographs 0
 Number of Offline Controls 0
 Number of Time/Area Diagrams 0
 Number of Online Controls 1
 Number of Storage Structures 1
 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	30
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	15

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 15 minute 30 year Winter (Storm)

```
Margin for Flood Risk Warning (mm) 300.0      DVD Status OFF
      Analysis Timestep      Fine Inertia Status OFF
      DTS Status      ON
```

PN	US/MH Name	Water	Surcharged	Flooded	Flow / Cap.	Overflow (l/s)	Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m³)			Time (mins)	Flow (l/s)	
1.000	S1	65.647	-0.103	0.000	0.21			3.8	OK
1.001	S2	65.534	-0.096	0.000	0.27			4.9	OK
2.000	S3	65.638	-0.112	0.000	0.15			3.8	OK
1.002	S4	65.414	-0.076	0.000	0.47			8.6	OK
3.000	S5	65.979	-0.121	0.000	0.08			3.8	OK
1.003	S6	65.321	0.031	0.000	0.74			13.6	SURCHARGED
4.000	S7	65.312	-0.108	0.000	0.17			4.9	OK
5.000	S8	65.847	-0.103	0.000	0.21			3.8	OK
5.001	S9	65.714	-0.111	0.000	0.15			5.5	OK
1.004	S10	65.220	0.115	0.000	1.58			26.7	SURCHARGED
6.000	S11	64.954	-0.281	0.000	0.14			20.2	OK
1.005	S12	64.849	-0.176	0.000	0.42			56.0	OK
7.000	S13	65.653	-0.097	0.000	0.27			4.9	OK
7.001	S14	65.465	-0.090	0.000	0.34			10.1	OK
7.002	S15	64.910	-0.065	0.000	0.61			10.0	OK
1.006	JCT	64.814	-0.091	0.000	0.56			73.9	OK*
1.007	S16	64.779	-0.011	0.000	0.55			78.5	OK
8.000	S17	65.664	-0.086	0.000	0.37			7.0	OK
8.001	S18	65.422	-0.078	0.000	0.46			14.5	OK
8.002	S19	64.827	-0.143	0.000	0.22			29.7	OK
8.003	S20	64.811	-0.044	0.000	0.27			32.1	OK
9.000	S21	64.972	-0.078	0.000	0.46			8.6	OK
9.001	S22	64.865	0.065	0.000	1.42			17.8	SURCHARGED
8.004	S23	64.795	0.035	0.000	0.50			63.7	SURCHARGED
1.008	S24	64.759	0.104	0.000	1.75			145.3	SURCHARGED
1.009	S25/FC	64.670	0.260	0.000	0.14		144	4.8	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze		Network 2020.1.3

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	40.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	1

Number of Input Hydrographs 0
 Number of Offline Controls 0
 Number of Time/Area Diagrams 0
 Number of Online Controls 1
 Number of Storage Structures 1
 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	30
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	30

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 30 minute 30 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
 Analysis Timestep Fine Inertia Status OFF
 DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded	Flow / Overflow		Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m³)			Time (mins)	Flow (l/s)	
1.000	S1	65.641	-0.109	0.000	0.17			3.0	OK
1.001	S2	65.527	-0.103	0.000	0.21			3.9	OK
2.000	S3	65.634	-0.116	0.000	0.11			3.0	OK
1.002	S4	65.404	-0.086	0.000	0.37			6.9	OK
3.000	S5	65.975	-0.125	0.000	0.06			3.0	OK
1.003	S6	65.225	-0.065	0.000	0.61			11.2	OK
4.000	S7	65.306	-0.114	0.000	0.13			3.9	OK
5.000	S8	65.841	-0.109	0.000	0.17			3.0	OK
5.001	S9	65.709	-0.116	0.000	0.12			4.3	OK
1.004	S10	65.156	0.051	0.000	1.30			22.0	SURCHARGED
6.000	S11	64.943	-0.292	0.000	0.11			16.2	OK
1.005	S12	64.807	-0.218	0.000	0.35			46.4	OK
7.000	S13	65.646	-0.104	0.000	0.21			3.9	OK
7.001	S14	65.457	-0.098	0.000	0.26			7.7	OK
7.002	S15	64.898	-0.077	0.000	0.47			7.8	OK
1.006	JCT	64.780	-0.125	0.000	0.47			61.8	OK*
1.007	S16	64.777	-0.013	0.000	0.45			64.2	OK
8.000	S17	65.656	-0.094	0.000	0.30			5.6	OK
8.001	S18	65.412	-0.088	0.000	0.36			11.2	OK
8.002	S19	64.779	-0.191	0.000	0.18			23.5	OK
8.003	S20	64.778	-0.077	0.000	0.21			25.8	OK
9.000	S21	64.963	-0.087	0.000	0.37			6.8	OK
9.001	S22	64.805	0.005	0.000	1.14			14.2	SURCHARGED
8.004	S23	64.778	0.018	0.000	0.40			51.3	SURCHARGED
1.008	S24	64.777	0.122	0.000	1.45			120.4	SURCHARGED
1.009	S25/FC	64.776	0.366	0.000	0.14		190	4.8	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze		Network 2020.1.3

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	40.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	2

Number of Input Hydrographs 0
 Number of Offline Controls 0
 Number of Time/Area Diagrams 0
 Number of Online Controls 1
 Number of Storage Structures 1
 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	30
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	60

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 60 minute 30 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
 Analysis Timestep Fine Inertia Status OFF
 DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded	Flow / Overflow		Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m ³)			Time (mins)	Flow (l/s)	
1.000	S1	65.633	-0.117	0.000	0.11			2.0	OK
1.001	S2	65.518	-0.112	0.000	0.14			2.6	OK
2.000	S3	65.627	-0.123	0.000	0.08			2.0	OK
1.002	S4	65.391	-0.099	0.000	0.25			4.5	OK
3.000	S5	65.970	-0.130	0.000	0.04			2.0	OK
1.003	S6	65.207	-0.083	0.000	0.40			7.4	OK
4.000	S7	65.300	-0.120	0.000	0.09			2.6	OK
5.000	S8	65.833	-0.117	0.000	0.11			2.0	OK
5.001	S9	65.703	-0.122	0.000	0.08			2.9	OK
1.004	S10	65.065	-0.040	0.000	0.88			14.8	OK
6.000	S11	64.928	-0.307	0.000	0.07			10.8	OK
1.005	S12	64.881	-0.144	0.000	0.24			31.6	OK
7.000	S13	65.637	-0.113	0.000	0.14			2.6	OK
7.001	S14	65.447	-0.108	0.000	0.17			5.2	OK
7.002	S15	64.883	-0.092	0.000	0.31			5.1	OK
1.006	JCT	64.879	-0.026	0.000	0.32			42.0	OK*
1.007	S16	64.877	0.087	0.000	0.29			41.7	SURCHARGED
8.000	S17	65.645	-0.105	0.000	0.20			3.7	OK
8.001	S18	65.400	-0.100	0.000	0.24			7.4	OK
8.002	S19	64.880	-0.090	0.000	0.12			16.1	OK
8.003	S20	64.879	0.024	0.000	0.14			17.2	SURCHARGED
9.000	S21	64.950	-0.100	0.000	0.24			4.5	OK
9.001	S22	64.879	0.079	0.000	0.75			9.4	SURCHARGED
8.004	S23	64.878	0.118	0.000	0.26			33.6	SURCHARGED
1.008	S24	64.877	0.222	0.000	0.93			77.0	SURCHARGED
1.009	S25/FC	64.876	0.466	0.000	0.14		230	4.8	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze		Network 2020.1.3

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	40.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	4

Number of Input Hydrographs 0
 Number of Offline Controls 0
 Number of Time/Area Diagrams 0
 Number of Online Controls 1
 Number of Storage Structures 1
 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	30
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	120

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 120 minute 30 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
Analysis Timestep Fine Inertia Status OFF
DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded	Flow / Overflow		Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m³)	Cap.	(l/s)	Time (mins)	Flow (l/s)	
1.000	S1	65.626	-0.124	0.000	0.07			1.2	OK
1.001	S2	65.510	-0.120	0.000	0.09			1.6	OK
2.000	S3	65.621	-0.129	0.000	0.05			1.2	OK
1.002	S4	65.379	-0.111	0.000	0.15			2.8	OK
3.000	S5	65.966	-0.134	0.000	0.03			1.2	OK
1.003	S6	65.191	-0.099	0.000	0.25			4.6	OK
4.000	S7	65.293	-0.127	0.000	0.06			1.6	OK
5.000	S8	65.825	-0.125	0.000	0.07			1.2	OK
5.001	S9	65.696	-0.129	0.000	0.05			1.8	OK
1.004	S10	65.034	-0.071	0.000	0.54			9.1	OK
6.000	S11	64.949	-0.286	0.000	0.05			6.7	OK
1.005	S12	64.948	-0.077	0.000	0.14			19.4	OK
7.000	S13	65.630	-0.120	0.000	0.09			1.6	OK
7.001	S14	65.437	-0.118	0.000	0.11			3.2	OK
7.002	S15	64.947	-0.028	0.000	0.19			3.2	OK
1.006	JCT	64.905	0.000	0.000	0.19			25.2	SURCHARGED*
1.007	S16	64.945	0.155	0.000	0.17			24.6	SURCHARGED
8.000	S17	65.635	-0.115	0.000	0.12			2.3	OK
8.001	S18	65.388	-0.112	0.000	0.15			4.6	OK
8.002	S19	64.947	-0.023	0.000	0.07			9.6	OK
8.003	S20	64.947	0.092	0.000	0.08			9.8	SURCHARGED
9.000	S21	64.949	-0.101	0.000	0.15			2.8	OK
9.001	S22	64.947	0.147	0.000	0.46			5.8	SURCHARGED
8.004	S23	64.946	0.186	0.000	0.15			19.2	SURCHARGED
1.008	S24	64.944	0.289	0.000	0.53			44.5	SURCHARGED
1.009	S25/FC	64.943	0.533	0.000	0.14		256	4.8	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze		Network 2020.1.3

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	40.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	4

Number of Input Hydrographs 0
 Number of Offline Controls 0
 Number of Time/Area Diagrams 0
 Number of Online Controls 1
 Number of Storage Structures 1
 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	30
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	240

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 240 minute 30 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
Analysis Timestep Fine Inertia Status OFF
DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded	Flow / Overflow		Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m³)	Cap.	(l/s)	Time (mins)	Flow (l/s)	
1.000	S1	65.620	-0.130	0.000	0.04			0.8	OK
1.001	S2	65.502	-0.128	0.000	0.05			1.0	OK
2.000	S3	65.617	-0.133	0.000	0.03			0.8	OK
1.002	S4	65.371	-0.119	0.000	0.09			1.7	OK
3.000	S5	65.962	-0.138	0.000	0.02			0.8	OK
1.003	S6	65.179	-0.111	0.000	0.15			2.8	OK
4.000	S7	65.288	-0.132	0.000	0.03			1.0	OK
5.000	S8	65.820	-0.130	0.000	0.04			0.8	OK
5.001	S9	65.692	-0.133	0.000	0.03			1.1	OK
1.004	S10	65.014	-0.091	0.000	0.33			5.6	OK
6.000	S11	64.975	-0.260	0.000	0.03			4.1	OK
1.005	S12	64.975	-0.050	0.000	0.09			11.8	OK
7.000	S13	65.622	-0.128	0.000	0.05			1.0	OK
7.001	S14	65.430	-0.125	0.000	0.06			1.9	OK
7.002	S15	64.975	0.000	0.000	0.12			1.9	OK
1.006	JCT	64.905	0.000	0.000	0.11			15.3	SURCHARGED*
1.007	S16	64.973	0.183	0.000	0.10			14.9	SURCHARGED
8.000	S17	65.627	-0.123	0.000	0.07			1.4	OK
8.001	S18	65.380	-0.120	0.000	0.09			2.8	OK
8.002	S19	64.975	0.005	0.000	0.04			5.8	SURCHARGED
8.003	S20	64.974	0.119	0.000	0.05			5.9	SURCHARGED
9.000	S21	64.976	-0.074	0.000	0.09			1.7	OK
9.001	S22	64.974	0.174	0.000	0.28			3.5	SURCHARGED
8.004	S23	64.974	0.214	0.000	0.09			11.7	SURCHARGED
1.008	S24	64.973	0.318	0.000	0.33			27.2	SURCHARGED
1.009	S25/FC	64.972	0.562	0.000	0.14		268	4.8	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze		Network 2020.1.3

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	40.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	6

Number of Input Hydrographs 0
 Number of Offline Controls 0
 Number of Time/Area Diagrams 0
 Number of Online Controls 1
 Number of Storage Structures 1
 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	30
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	360

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 360 minute 30 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
Analysis Timestep Fine Inertia Status OFF
DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded	Flow / Overflow		Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m³)			Time (mins)	Flow (l/s)	
1.000	S1	65.617	-0.133	0.000	0.03			0.6	OK
1.001	S2	65.499	-0.131	0.000	0.04			0.7	OK
2.000	S3	65.615	-0.135	0.000	0.02			0.6	OK
1.002	S4	65.366	-0.124	0.000	0.07			1.3	OK
3.000	S5	65.959	-0.141	0.000	0.01			0.6	OK
1.003	S6	65.173	-0.117	0.000	0.11			2.1	OK
4.000	S7	65.286	-0.134	0.000	0.02			0.7	OK
5.000	S8	65.817	-0.133	0.000	0.03			0.6	OK
5.001	S9	65.690	-0.135	0.000	0.02			0.8	OK
1.004	S10	65.005	-0.100	0.000	0.24			4.1	OK
6.000	S11	64.955	-0.280	0.000	0.02			3.0	OK
1.005	S12	64.955	-0.070	0.000	0.07			8.7	OK
7.000	S13	65.619	-0.131	0.000	0.04			0.7	OK
7.001	S14	65.426	-0.129	0.000	0.05			1.4	OK
7.002	S15	64.954	-0.021	0.000	0.09			1.4	OK
1.006	JCT	64.905	0.000	0.000	0.09			11.3	SURCHARGED*
1.007	S16	64.953	0.163	0.000	0.08			11.2	SURCHARGED
8.000	S17	65.623	-0.127	0.000	0.05			1.0	OK
8.001	S18	65.375	-0.125	0.000	0.07			2.1	OK
8.002	S19	64.954	-0.016	0.000	0.03			4.3	OK
8.003	S20	64.954	0.099	0.000	0.04			4.4	SURCHARGED
9.000	S21	64.955	-0.095	0.000	0.07			1.3	OK
9.001	S22	64.954	0.154	0.000	0.21			2.6	SURCHARGED
8.004	S23	64.953	0.193	0.000	0.07			8.7	SURCHARGED
1.008	S24	64.952	0.297	0.000	0.24			20.3	SURCHARGED
1.009	S25/FC	64.952	0.542	0.000	0.14		306	4.8	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze		Network 2020.1.3

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	40.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	12

Number of Input Hydrographs 0 Number of Offline Controls 0 Number of Time/Area Diagrams 0
Number of Online Controls 1 Number of Storage Structures 1 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	30
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	720

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze	Network 2020.1.3	

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	40.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	24

Number of Input Hydrographs 0
 Number of Offline Controls 0
 Number of Time/Area Diagrams 0
 Number of Online Controls 1
 Number of Storage Structures 1
 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	30
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	1440

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 1440 minute 30 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
 Analysis Timestep Fine Inertia Status OFF
 DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded	Flow / Overflow		Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m ³)			Time (mins)	Flow (l/s)	
1.000	S1	65.608	-0.142	0.000	0.01			0.2	OK
1.001	S2	65.490	-0.140	0.000	0.01			0.3	OK
2.000	S3	65.605	-0.145	0.000	0.01			0.2	OK
1.002	S4	65.356	-0.134	0.000	0.02			0.5	OK
3.000	S5	65.953	-0.147	0.000	0.00			0.2	OK
1.003	S6	65.159	-0.131	0.000	0.04			0.7	OK
4.000	S7	65.276	-0.144	0.000	0.01			0.3	OK
5.000	S8	65.808	-0.142	0.000	0.01			0.2	OK
5.001	S9	65.681	-0.144	0.000	0.01			0.3	OK
1.004	S10	64.985	-0.120	0.000	0.09			1.5	OK
6.000	S11	64.873	-0.362	0.000	0.01			1.1	OK
1.005	S12	64.699	-0.326	0.000	0.02			3.1	OK
7.000	S13	65.610	-0.140	0.000	0.01			0.3	OK
7.001	S14	65.417	-0.138	0.000	0.02			0.5	OK
7.002	S15	64.842	-0.133	0.000	0.03			0.5	OK
1.006	JCT	64.693	-0.212	0.000	0.03			4.2	OK*
1.007	S16	64.692	-0.098	0.000	0.03			4.3	OK
8.000	S17	65.614	-0.136	0.000	0.02			0.4	OK
8.001	S18	65.366	-0.134	0.000	0.02			0.7	OK
8.002	S19	64.693	-0.277	0.000	0.01			1.6	OK
8.003	S20	64.693	-0.162	0.000	0.01			1.8	OK
9.000	S21	64.916	-0.134	0.000	0.02			0.5	OK
9.001	S22	64.693	-0.107	0.000	0.07			0.9	OK
8.004	S23	64.692	-0.068	0.000	0.03			3.5	OK
1.008	S24	64.691	0.036	0.000	0.10			8.0	SURCHARGED
1.009	S25/FC	64.691	0.281	0.000	0.14		336	4.8	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze	Network 2020.1.3	

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	45.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	1

Number of Input Hydrographs 0
 Number of Offline Controls 0
 Number of Time/Area Diagrams 0
 Number of Online Controls 1
 Number of Storage Structures 1
 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	100
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	15

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 15 minute 100 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
 Analysis Timestep Fine Inertia Status OFF
 DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded	Flow / Cap.	Overflow (l/s)	Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m³)			Time (mins)	Flow (l/s)	
1.000	S1	65.665	-0.085	0.000	0.31			5.4	OK
1.001	S2	65.648	0.018	0.000	0.36			6.4	SURCHARGED
2.000	S3	65.648	-0.102	0.000	0.21			5.4	OK
1.002	S4	65.626	0.136	0.000	0.63			11.6	SURCHARGED
3.000	S5	65.984	-0.116	0.000	0.12			5.4	OK
1.003	S6	65.558	0.268	0.000	0.96			17.6	SURCHARGED
4.000	S7	65.407	-0.013	0.000	0.24			6.8	OK
5.000	S8	65.856	-0.094	0.000	0.30			5.4	OK
5.001	S9	65.722	-0.103	0.000	0.22			7.9	OK
1.004	S10	65.384	0.279	0.000	2.11			35.7	SURCHARGED
6.000	S11	65.034	-0.201	0.000	0.19			28.0	OK
1.005	S12	65.015	-0.010	0.000	0.58			77.3	OK
7.000	S13	65.664	-0.086	0.000	0.38			7.0	OK
7.001	S14	65.478	-0.077	0.000	0.48			14.4	OK
7.002	S15	65.014	0.039	0.000	0.84			13.8	SURCHARGED
1.006	JCT	64.905	0.000	0.000	0.76			101.2	SURCHARGED*
1.007	S16	64.925	0.135	0.000	0.74			105.7	SURCHARGED
8.000	S17	65.679	-0.071	0.000	0.53			10.0	OK
8.001	S18	65.440	-0.060	0.000	0.66			20.6	OK
8.002	S19	64.986	0.016	0.000	0.32			42.1	SURCHARGED
8.003	S20	64.963	0.108	0.000	0.39			47.1	SURCHARGED
9.000	S21	65.200	0.150	0.000	0.64			12.0	SURCHARGED
9.001	S22	65.096	0.296	0.000	1.94			24.3	SURCHARGED
8.004	S23	64.940	0.180	0.000	0.74			93.6	SURCHARGED
1.008	S24	64.889	0.234	0.000	2.39			199.3	SURCHARGED
1.009	S25/FC	64.829	0.419	0.000	0.14		210	4.8	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze		Network 2020.1.3

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	45.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	1

Number of Input Hydrographs 0 Number of Offline Controls 0 Number of Time/Area Diagrams 0
 Number of Online Controls 1 Number of Storage Structures 1 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	100
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	30

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 30 minute 100 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
 Analysis Timestep Fine Inertia Status OFF
 DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded	Flow / Cap.	Overflow (l/s)	Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m³)			Time (mins)	Flow (l/s)	
1.000	S1	65.650	-0.100	0.000	0.24			4.3	OK
1.001	S2	65.537	-0.093	0.000	0.31			5.6	OK
2.000	S3	65.640	-0.110	0.000	0.16			4.3	OK
1.002	S4	65.460	-0.030	0.000	0.52			9.5	OK
3.000	S5	65.981	-0.119	0.000	0.09			4.3	OK
1.003	S6	65.408	0.118	0.000	0.84			15.3	SURCHARGED
4.000	S7	65.314	-0.106	0.000	0.19			5.5	OK
5.000	S8	65.849	-0.101	0.000	0.24			4.3	OK
5.001	S9	65.716	-0.109	0.000	0.17			6.2	OK
1.004	S10	65.282	0.177	0.000	1.81			30.6	SURCHARGED
6.000	S11	65.004	-0.231	0.000	0.16			23.1	OK
1.005	S12	65.002	-0.023	0.000	0.45			60.2	OK
7.000	S13	65.656	-0.094	0.000	0.30			5.5	OK
7.001	S14	65.468	-0.087	0.000	0.37			11.1	OK
7.002	S15	65.001	0.026	0.000	0.68			11.2	SURCHARGED
1.006	JCT	64.905	0.000	0.000	0.61			80.8	SURCHARGED*
1.007	S16	64.997	0.207	0.000	0.58			82.8	SURCHARGED
8.000	S17	65.668	-0.082	0.000	0.43			8.0	OK
8.001	S18	65.427	-0.073	0.000	0.51			16.1	OK
8.002	S19	64.999	0.029	0.000	0.25			33.8	SURCHARGED
8.003	S20	64.998	0.143	0.000	0.31			37.0	SURCHARGED
9.000	S21	65.030	-0.020	0.000	0.52			9.7	OK
9.001	S22	64.999	0.199	0.000	1.56			19.6	SURCHARGED
8.004	S23	64.997	0.237	0.000	0.59			74.7	SURCHARGED
1.008	S24	64.996	0.341	0.000	1.98			164.6	SURCHARGED
1.009	S25/FC	64.995	0.585	0.000	0.14		273	4.8	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze		Network 2020.1.3

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	45.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	2

Number of Input Hydrographs 0 Number of Offline Controls 0 Number of Time/Area Diagrams 0
 Number of Online Controls 1 Number of Storage Structures 1 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	100
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	60

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 60 minute 100 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
Analysis Timestep Fine Inertia Status OFF
DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded			Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m³)	Flow / Cap.	Overflow (l/s)	Time (mins)	Flow (l/s)	
1.000	S1	65.640	-0.110	0.000	0.16			2.9	OK
1.001	S2	65.526	-0.104	0.000	0.21			3.7	OK
2.000	S3	65.633	-0.117	0.000	0.11			2.9	OK
1.002	S4	65.402	-0.088	0.000	0.36			6.6	OK
3.000	S5	65.974	-0.126	0.000	0.06			2.9	OK
1.003	S6	65.223	-0.067	0.000	0.58			10.7	OK
4.000	S7	65.306	-0.114	0.000	0.13			3.7	OK
5.000	S8	65.840	-0.110	0.000	0.16			2.9	OK
5.001	S9	65.709	-0.116	0.000	0.11			4.1	OK
1.004	S10	65.178	0.073	0.000	1.27			21.4	SURCHARGED
6.000	S11	65.173	-0.062	0.000	0.11			15.5	OK
1.005	S12	65.172	0.147	0.000	0.32			43.4	SURCHARGED
7.000	S13	65.646	-0.104	0.000	0.20			3.7	OK
7.001	S14	65.456	-0.099	0.000	0.25			7.5	OK
7.002	S15	65.171	0.196	0.000	0.45			7.4	SURCHARGED
1.006	JCT	64.905	0.000	0.000	0.42			55.7	SURCHARGED*
1.007	S16	65.168	0.378	0.000	0.38			54.6	SURCHARGED
8.000	S17	65.655	-0.095	0.000	0.28			5.3	OK
8.001	S18	65.411	-0.089	0.000	0.34			10.8	OK
8.002	S19	65.171	0.201	0.000	0.17			22.1	SURCHARGED
8.003	S20	65.170	0.315	0.000	0.19			22.6	SURCHARGED
9.000	S21	65.174	0.124	0.000	0.35			6.6	SURCHARGED
9.001	S22	65.170	0.370	0.000	1.07			13.5	SURCHARGED
8.004	S23	65.168	0.408	0.000	0.35			45.0	SURCHARGED
1.008	S24	65.167	0.512	0.000	1.24			103.1	SURCHARGED
1.009	S25/FC	65.166	0.756	0.000	0.14		338	4.8	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 13/08/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze		Network 2020.1.3

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	45.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	4

Number of Input Hydrographs 0
 Number of Offline Controls 0
 Number of Time/Area Diagrams 0
 Number of Online Controls 1
 Number of Storage Structures 1
 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	100
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	120

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 120 minute 100 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
Analysis Timestep Fine Inertia Status OFF
DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded	Flow / Cap.	Overflow (l/s)	Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m³)			Time (mins)	Flow (l/s)	
1.000	S1	65.632	-0.118	0.000	0.10			1.8	OK
1.001	S2	65.515	-0.115	0.000	0.13			2.3	OK
2.000	S3	65.625	-0.125	0.000	0.07			1.8	OK
1.002	S4	65.388	-0.102	0.000	0.22			4.0	OK
3.000	S5	65.969	-0.131	0.000	0.04			1.8	OK
1.003	S6	65.303	0.013	0.000	0.36			6.6	SURCHARGED
4.000	S7	65.301	-0.119	0.000	0.08			2.3	OK
5.000	S8	65.831	-0.119	0.000	0.10			1.8	OK
5.001	S9	65.701	-0.124	0.000	0.07			2.5	OK
1.004	S10	65.299	0.194	0.000	0.78			13.1	SURCHARGED
6.000	S11	65.296	0.061	0.000	0.07			9.5	SURCHARGED
1.005	S12	65.295	0.270	0.000	0.19			25.8	SURCHARGED
7.000	S13	65.635	-0.115	0.000	0.12			2.3	OK
7.001	S14	65.444	-0.111	0.000	0.15			4.6	OK
7.002	S15	65.294	0.319	0.000	0.28			4.5	SURCHARGED
1.006	JCT	64.905	0.000	0.000	0.25			32.8	SURCHARGED*
1.007	S16	65.292	0.502	0.000	0.22			32.2	SURCHARGED
8.000	S17	65.642	-0.108	0.000	0.18			3.3	OK
8.001	S18	65.396	-0.104	0.000	0.21			6.6	OK
8.002	S19	65.294	0.324	0.000	0.10			13.4	SURCHARGED
8.003	S20	65.293	0.438	0.000	0.11			13.4	SURCHARGED
9.000	S21	65.296	0.246	0.000	0.22			4.1	SURCHARGED
9.001	S22	65.294	0.494	0.000	0.63			7.8	SURCHARGED
8.004	S23	65.292	0.532	0.000	0.22			27.9	SURCHARGED
1.008	S24	65.291	0.636	0.000	0.75			62.8	SURCHARGED
1.009	S25/FC	65.291	0.881	0.000	0.14		380	4.8	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze	Network 2020.1.3	

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	45.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	4

Number of Input Hydrographs 0
 Number of Offline Controls 0
 Number of Time/Area Diagrams 0
 Number of Online Controls 1
 Number of Storage Structures 1
 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	100
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	240

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 240 minute 100 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
 Analysis Timestep Fine Inertia Status OFF
 DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded	Flow / Overflow		Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m³)			Time (mins)	Flow (l/s)	
1.000	S1	65.624	-0.126	0.000	0.06			1.1	OK
1.001	S2	65.507	-0.123	0.000	0.08			1.4	OK
2.000	S3	65.619	-0.131	0.000	0.04			1.1	OK
1.002	S4	65.376	-0.114	0.000	0.13			2.4	OK
3.000	S5	65.965	-0.135	0.000	0.02			1.1	OK
1.003	S6	65.372	0.082	0.000	0.22			4.0	SURCHARGED
4.000	S7	65.370	-0.050	0.000	0.05			1.4	OK
5.000	S8	65.823	-0.127	0.000	0.06			1.1	OK
5.001	S9	65.695	-0.130	0.000	0.04			1.5	OK
1.004	S10	65.370	0.265	0.000	0.47			7.9	SURCHARGED
6.000	S11	65.367	0.132	0.000	0.04			5.7	SURCHARGED
1.005	S12	65.367	0.342	0.000	0.11			15.1	SURCHARGED
7.000	S13	65.627	-0.123	0.000	0.07			1.4	OK
7.001	S14	65.435	-0.120	0.000	0.09			2.7	OK
7.002	S15	65.367	0.392	0.000	0.17			2.7	SURCHARGED
1.006	JCT	64.905	0.000	0.000	0.15			19.4	SURCHARGED*
1.007	S16	65.365	0.575	0.000	0.14			19.5	SURCHARGED
8.000	S17	65.632	-0.118	0.000	0.11			2.0	OK
8.001	S18	65.385	-0.115	0.000	0.13			4.0	OK
8.002	S19	65.367	0.397	0.000	0.06			8.1	SURCHARGED
8.003	S20	65.366	0.511	0.000	0.07			8.6	SURCHARGED
9.000	S21	65.368	0.318	0.000	0.13			2.4	SURCHARGED
9.001	S22	65.366	0.566	0.000	0.37			4.7	SURCHARGED
8.004	S23	65.365	0.605	0.000	0.14			17.3	SURCHARGED
1.008	S24	65.364	0.709	0.000	0.46			38.3	SURCHARGED
1.009	S25/FC	65.363	0.953	0.000	0.14		404	4.8	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze		Network 2020.1.3

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	45.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	6

Number of Input Hydrographs 0
 Number of Offline Controls 0
 Number of Time/Area Diagrams 0
 Number of Online Controls 1
 Number of Storage Structures 1
 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	100
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	360

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 360 minute 100 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
Analysis Timestep Fine Inertia Status OFF
DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded			Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m³)	Flow / Cap.	Overflow (l/s)	Time (mins)	Flow (l/s)	
1.000	S1	65.620	-0.130	0.000	0.04			0.8	OK
1.001	S2	65.503	-0.127	0.000	0.06			1.0	OK
2.000	S3	65.617	-0.133	0.000	0.03			0.8	OK
1.002	S4	65.371	-0.119	0.000	0.10			1.8	OK
3.000	S5	65.962	-0.138	0.000	0.02			0.8	OK
1.003	S6	65.365	0.075	0.000	0.16			2.9	SURCHARGED
4.000	S7	65.363	-0.057	0.000	0.03			1.0	OK
5.000	S8	65.820	-0.130	0.000	0.04			0.8	OK
5.001	S9	65.692	-0.133	0.000	0.03			1.1	OK
1.004	S10	65.363	0.258	0.000	0.34			5.8	SURCHARGED
6.000	S11	65.361	0.126	0.000	0.03			4.2	SURCHARGED
1.005	S12	65.361	0.336	0.000	0.08			11.1	SURCHARGED
7.000	S13	65.623	-0.127	0.000	0.05			1.0	OK
7.001	S14	65.430	-0.125	0.000	0.07			2.0	OK
7.002	S15	65.361	0.386	0.000	0.12			2.0	SURCHARGED
1.006	JCT	64.905	0.000	0.000	0.11			14.4	SURCHARGED*
1.007	S16	65.359	0.569	0.000	0.10			14.5	SURCHARGED
8.000	S17	65.628	-0.122	0.000	0.08			1.5	OK
8.001	S18	65.381	-0.119	0.000	0.09			2.9	OK
8.002	S19	65.360	0.390	0.000	0.04			5.9	SURCHARGED
8.003	S20	65.360	0.505	0.000	0.05			6.3	SURCHARGED
9.000	S21	65.361	0.311	0.000	0.10			1.8	SURCHARGED
9.001	S22	65.360	0.560	0.000	0.28			3.4	SURCHARGED
8.004	S23	65.359	0.599	0.000	0.10			12.7	SURCHARGED
1.008	S24	65.358	0.703	0.000	0.34			28.3	SURCHARGED
1.009	S25/FC	65.357	0.947	0.000	0.14		414	4.8	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Storage Structures for Storm

Cellular Storage Manhole: S25/FC, DS/PN: 1.009

Invert Level (m) 64.270 Safety Factor 2.0
Infiltration Coefficient Base (m/hr) 0.00000 Porosity 0.95
Infiltration Coefficient Side (m/hr) 0.00000

Depth (m)	Area (m ²)	Inf. Area (m ²)	Depth (m)	Area (m ²)	Inf. Area (m ²)
0.000	170.0	0.0	1.300	0.0	0.0
0.100	170.0	0.0	1.400	0.0	0.0
0.200	170.0	0.0	1.500	0.0	0.0
0.300	170.0	0.0	1.600	0.0	0.0
0.400	170.0	0.0	1.700	0.0	0.0
0.500	170.0	0.0	1.800	0.0	0.0
0.600	170.0	0.0	1.900	0.0	0.0
0.700	170.0	0.0	2.000	0.0	0.0
0.800	170.0	0.0	2.100	0.0	0.0
0.900	170.0	0.0	2.200	0.0	0.0
1.000	170.0	0.0	2.300	0.0	0.0
1.100	170.0	0.0	2.400	0.0	0.0
1.200	0.0	0.0	2.500	0.0	0.0

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 720 minute 100 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
Analysis Timestep Fine Inertia Status OFF
DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded	Flow / Cap.	Overflow (l/s)	Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m³)			Time (mins)	Flow (l/s)	
1.000	S1	65.616	-0.134	0.000	0.03			0.5	OK
1.001	S2	65.498	-0.132	0.000	0.03			0.6	OK
2.000	S3	65.612	-0.138	0.000	0.02			0.5	OK
1.002	S4	65.363	-0.127	0.000	0.06			1.0	OK
3.000	S5	65.957	-0.143	0.000	0.01			0.5	OK
1.003	S6	65.263	-0.027	0.000	0.09			1.7	OK
4.000	S7	65.284	-0.136	0.000	0.02			0.6	OK
5.000	S8	65.816	-0.134	0.000	0.03			0.5	OK
5.001	S9	65.688	-0.137	0.000	0.02			0.7	OK
1.004	S10	65.261	0.156	0.000	0.20			3.4	SURCHARGED
6.000	S11	65.259	0.024	0.000	0.02			2.5	SURCHARGED
1.005	S12	65.259	0.234	0.000	0.05			6.8	SURCHARGED
7.000	S13	65.617	-0.133	0.000	0.03			0.6	OK
7.001	S14	65.424	-0.131	0.000	0.04			1.2	OK
7.002	S15	65.258	0.283	0.000	0.07			1.2	SURCHARGED
1.006	JCT	64.905	0.000	0.000	0.07			8.8	SURCHARGED*
1.007	S16	65.257	0.467	0.000	0.06			8.7	SURCHARGED
8.000	S17	65.620	-0.130	0.000	0.05			0.8	OK
8.001	S18	65.372	-0.128	0.000	0.05			1.7	OK
8.002	S19	65.258	0.288	0.000	0.03			3.5	SURCHARGED
8.003	S20	65.258	0.403	0.000	0.03			3.6	SURCHARGED
9.000	S21	65.259	0.209	0.000	0.06			1.0	SURCHARGED
9.001	S22	65.258	0.458	0.000	0.16			2.0	SURCHARGED
8.004	S23	65.257	0.497	0.000	0.06			7.4	SURCHARGED
1.008	S24	65.256	0.601	0.000	0.20			16.9	SURCHARGED
1.009	S25/FC	65.255	0.845	0.000	0.14		504	4.8	SURCHARGED

Flo Consult UK Ltd		Page 1
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024 File SW Network Calcualtions ...	Designed by MDS Checked by MDS	
Innovyze		Network 2020.1.3

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.950	Additional Flow - % of Total Flow	45.000
Areal Reduction Factor	1.000	MADD Factor * 10m³/ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	4320
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	24

Number of Input Hydrographs 0
 Number of Offline Controls 0
 Number of Time/Area Diagrams 0
 Number of Online Controls 1
 Number of Storage Structures 1
 Number of Real Time Controls 0

Synthetic Rainfall Details

Rainfall Model	FEH
Return Period (years)	100
FEH Rainfall Version	2013
Site Location	GB 388687 395445 SJ 88687 95445
Data Type	Point
Summer Storms	No
Winter Storms	Yes
Cv (Summer)	0.750
Cv (Winter)	0.950
Storm Duration (mins)	1440

©1982-2020 Innovyze

Flo Consult UK Ltd		Page 2
4 Market Square Old Amersham Buckinghamshire, HP7 0DQ	Levenshulme Road Surface Water Network Calculations	
Date 09/09/2024	Designed by MDS	
File SW Network Calcualtions ...	Checked by MDS	
Innovyze	Network 2020.1.3	

Summary of Results for 1440 minute 100 year Winter (Storm)

Margin for Flood Risk Warning (mm) 300.0 DVD Status OFF
Analysis Timestep Fine Inertia Status OFF
DTS Status ON

PN	US/MH Name	Water	Surcharged	Flooded	Flow / Overflow		Half Drain	Pipe	Status
		Level (m)	Depth (m)	Volume (m³)			Time (mins)	Flow (l/s)	
1.000	S1	65.611	-0.139	0.000	0.01			0.3	OK
1.001	S2	65.493	-0.137	0.000	0.02			0.3	OK
2.000	S3	65.607	-0.143	0.000	0.01			0.3	OK
1.002	S4	65.358	-0.132	0.000	0.03			0.6	OK
3.000	S5	65.954	-0.146	0.000	0.01			0.3	OK
1.003	S6	65.162	-0.128	0.000	0.05			1.0	OK
4.000	S7	65.278	-0.142	0.000	0.01			0.3	OK
5.000	S8	65.810	-0.140	0.000	0.01			0.3	OK
5.001	S9	65.682	-0.143	0.000	0.01			0.4	OK
1.004	S10	65.032	-0.073	0.000	0.12			2.0	OK
6.000	S11	65.030	-0.205	0.000	0.01			1.4	OK
1.005	S12	65.030	0.005	0.000	0.03			4.2	SURCHARGED
7.000	S13	65.613	-0.137	0.000	0.02			0.3	OK
7.001	S14	65.420	-0.135	0.000	0.02			0.7	OK
7.002	S15	65.029	0.054	0.000	0.04			0.7	SURCHARGED
1.006	JCT	64.905	0.000	0.000	0.04			5.4	SURCHARGED*
1.007	S16	65.028	0.238	0.000	0.04			5.4	SURCHARGED
8.000	S17	65.616	-0.134	0.000	0.03			0.5	OK
8.001	S18	65.367	-0.133	0.000	0.03			1.0	OK
8.002	S19	65.029	0.059	0.000	0.02			2.0	SURCHARGED
8.003	S20	65.029	0.174	0.000	0.02			2.1	SURCHARGED
9.000	S21	65.030	-0.020	0.000	0.03			0.6	OK
9.001	S22	65.029	0.229	0.000	0.10			1.2	SURCHARGED
8.004	S23	65.028	0.268	0.000	0.03			4.3	SURCHARGED
1.008	S24	65.027	0.372	0.000	0.12			10.1	SURCHARGED
1.009	S25/FC	65.027	0.617	0.000	0.14		528	4.8	SURCHARGED

Appendix I


Pollutant Control Chamber

ACO Water Management:

Civils + Infrastructure

Uniclass L7315 + L2123	EPIC J3413
CI/SfB (52.5)	In6

ACO QuadraCeptor

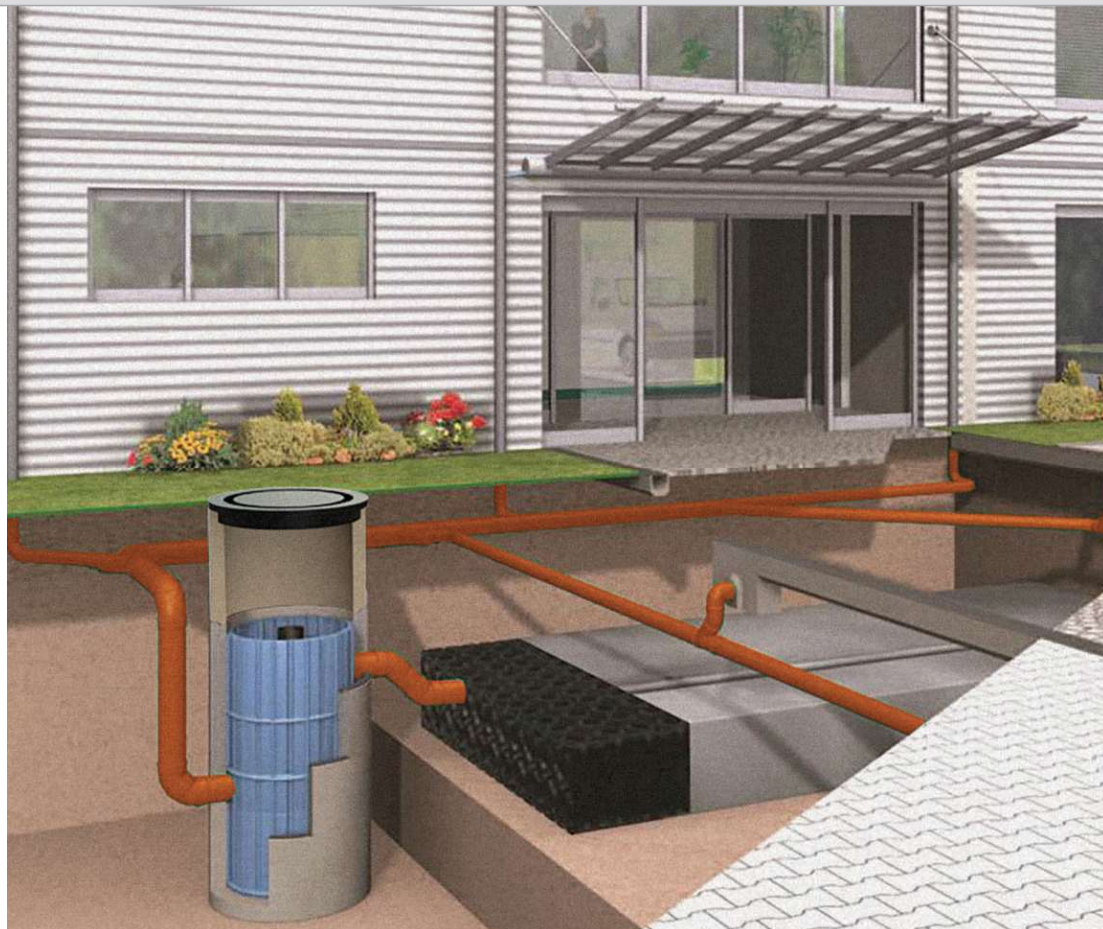

ACO QuadraCeptor

Four Stage Surface Water Treatment Unit



Introduction to ACO QuadraCeptor

ACO QuadraCeptor is a specialist rainwater and surface water runoff filtration system for the removal of sediment and harmful pollutants.

Surface Water Management

ACO QuadraCeptor is an efficient and reliable system for the treatment of surface water run-off from roofs, car parks and roads, even in heavily trafficked areas, before discharge in to ground (infiltration) or to a surface water feature.

The system has been designed to remove, in a four stage process, heavy particles, silt and nutrients and dissolved materials, such as heavy metals, from the surface water as part of an integrated Sustainable Drainage Solution. ACO QuadraCeptor will improve the water quality ensuring pollutants are not infiltrated into the soil.

Where infiltration is not feasible, the surface water discharged from site needs to be treated to an acceptable level.

Where this is to a watercourse, the Environment Agency (in England), the Scottish Environmental Protection Agency or Natural Resources Wales in line with legislation and guidelines such as the Water Framework Directive, will determine the levels of pollutants that can be discharged from site based on a number of factors such as the sensitivity of the receiving water, the dilution, etc.

Using the ACO QuadraCeptor at some point in the SuDS treatment train before discharge ensures clean surface water run-off is discharged from site meeting discharge consent limits on pollutants.

ACO's Water Management solutions team's technical expertise and knowledge of current best practice is your assurance of an affordable, long term sustainable solution.

Source control

Source Control: Changes in the Planning process for new developments from April 2015 will require all development, except the most minor, to have a SuDS solution for managing surface water runoff on-site. The first objective of any SuDS scheme is to manage surface water runoff at source and, where feasible, not to allow surface water runoff to discharge from the site.



What is ACO QuadraCeptor?

The ACO QuadraCeptor uses an upflow filtration process, resulting in minimal head loss between the inlet and the outlet. The rainwater is treated within the unit by the following 4 processes: sedimentation, filtration, adsorption and precipitation. The cleaned water is of an outstanding water quality.

The initial treatment steps take place in the hydrodynamic separator stage, where sedimentation of solid particles occurs within a radial flow regime.

To prevent remobilisation, settled material passes through a funnel trap into the silt chamber at the base of the unit.

Secondary treatment of raw water occurs via a suite of filters located above the separator unit. These filtration units cover the entire diameter of the unit's housing. As water flows upwards through the removable filter elements the filtration media is kept saturated. Such saturation maximises filter efficiency by minimising the rate at which filter units clog.

The filter elements can be cleaned when required and are easy to exchange when the media is exhausted.

ACO QuadraCeptor is supplied in a plastic housing and is safe and easy to fit on site. It is designed for installation within load bearing shafts and can be installed in standard concrete or plastic chambers.

Why choose ACO QuadraCeptor

An integrated approach to surface water quantity and quality

By using ACO QuadraCeptor in conjunction with attenuation and flow control devices from ACO's water management solutions, surface water run-off can be discharged from site at an agreed rate, at a permitted quality.

Low maintenance

There are no moving parts in the ACO QuadraCeptor, meaning the only maintenance required is occasional emptying of the silt chamber (an ACO silt level alarm can be fitted) and cleaning or replacing of the filters when required.

Easy to install

The ACO QuadraCeptor is supplied as a standalone unit, easily installed in a load bearing shaft, either standard concrete or plastic chambers.

How it works

Step 1

Surface water run-off from the catchment area drains into the lower section of the QuadraCeptor shaft. A deflector plate initiates radial flow.

Step 2

Sedimentation of particles, especially the larger and denser fractions, takes place in the hydrodynamic separator due to turbulent secondary flows within the radial flow regime.

Step 3


The settleable solids are retained in the silt trap chamber. This chamber should be emptied periodically, via the central by-pass tube.

Step 4

Four filter elements are located within the filter shaft. As water flows upwards fine particles are filtered out and dissolved pollutants are precipitated and adsorbed. Filter units can be backwashed simply and, if completely clogged or exhausted, can easily be replaced.

Step 5

Clean water above the filter elements passes to discharge to a soakaway or watercourse. Normal concentrations of dissolved oils are retained within the filter elements but any free floating oil that does pass through the filters is retained in an integrated oil trap.

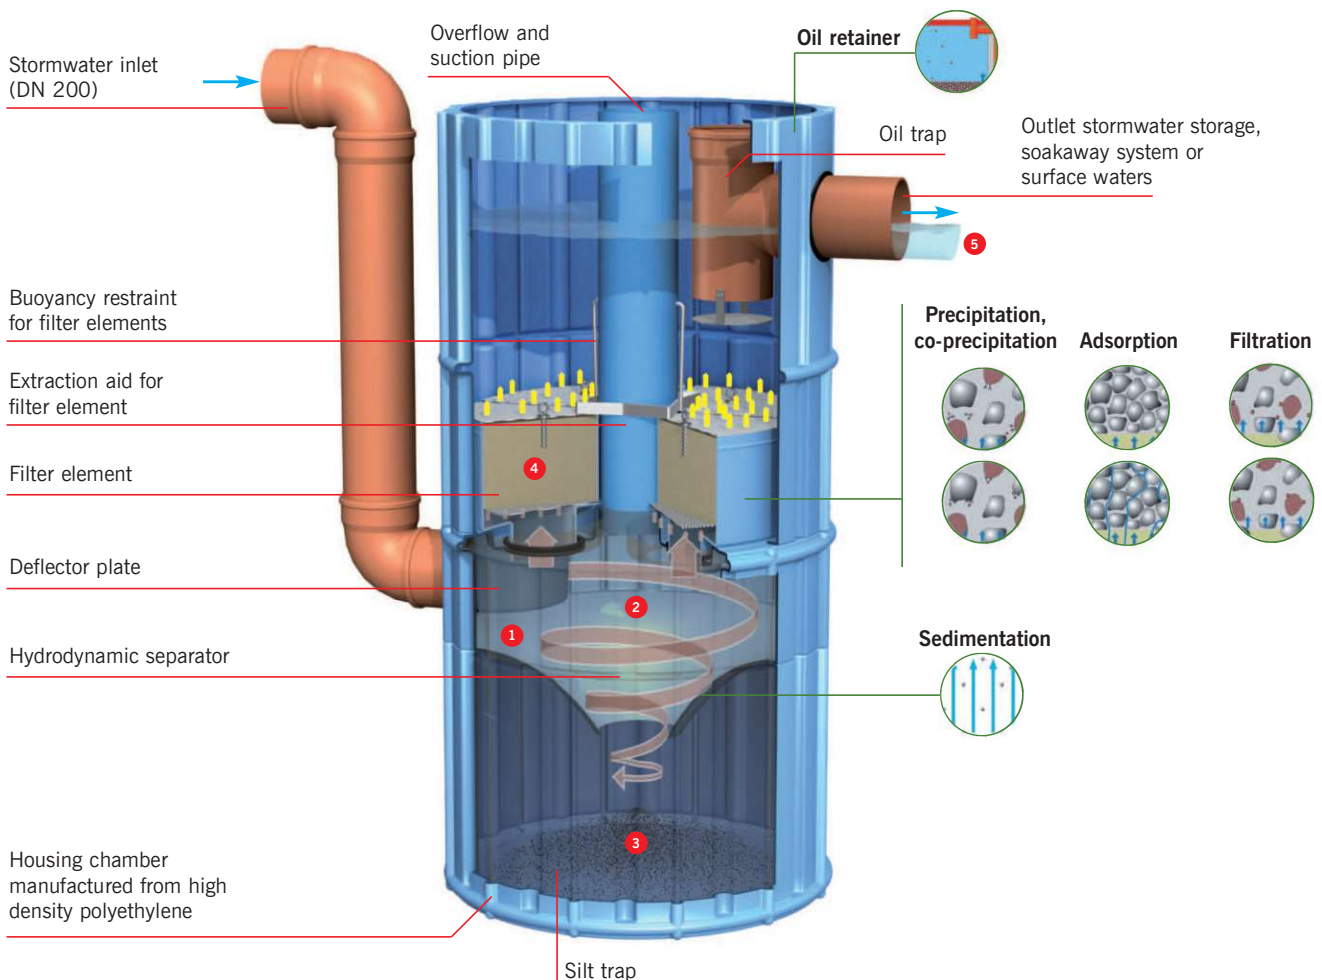

ACO QuadraCeptor Range

The ACO QuadraCeptor is available with various filter types, depending on the usage of the connected area. The three options are:


R1000 (Roof)	Application: Roof areas that do not have a significant proportion of uncoated metals* Material: Filter Substrate: Roof Weight of filter element: 34kg Total weight of ACO QuadraCeptor unit including polyethylene housing: 220kg
T750 (Traffic)	Application: Trafficked areas with normal levels of pollutants, such as staff car parks and side streets. Material: Filter Substrate: Traffic Weight of filter element: 34kg Total weight of ACO QuadraCeptor unit including polyethylene housing: 220kg
HT 500 (Heavy Traffic)	Application: Heavily traffic areas, such as main highways and supermarket car parks with high vehicle turnover. This option has DIBt approval. Material: Filter Substrate: Heavy Traffic Weight of filter element: 54kg Total weight of ACO QuadraCeptor unit including polyethylene housing: 300kg

*QuadraCeptor solutions are available for removal of high levels of copper or zinc: please contact technical@aco.co.uk or 01462 816666.

ACO QuadraCeptor

Product code	Description	Nature of the surface to be drained	Size of the surface to be drained (m²)	Replacement filter element (set of 4)
26650	R1000 (Roof)	Roofs without a significant proportion (<5%) of uncoated metals	1000	26654
26651	T750 (Traffic)	Trafficked areas with normal levels of pollutants, such as staff car parks and side streets	750	26654
26652	HT500 (Heavy traffic)	Heavily traffic areas, such as main highways and supermarket car parks with high vehicle turnover	500	26555

Dimensions

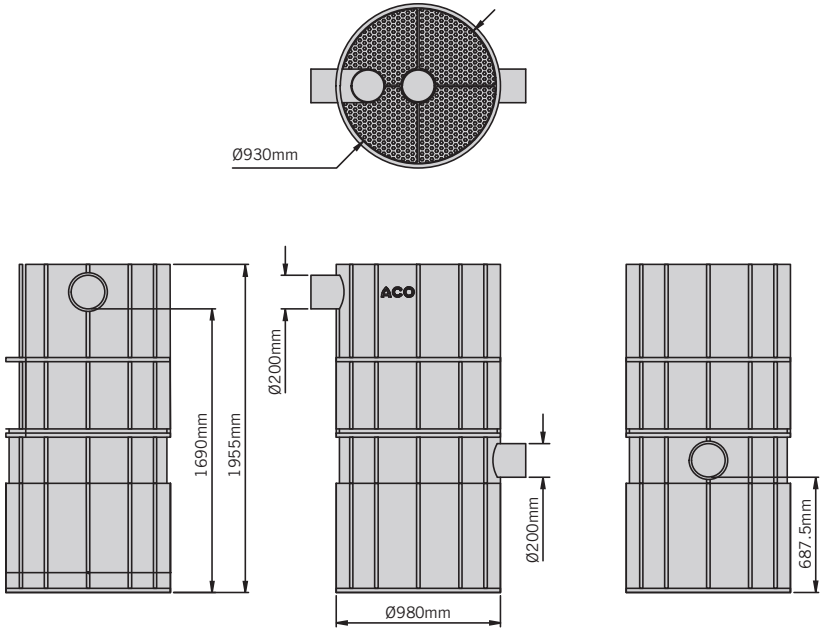

Water quality performance

Pollution Mitigation Indices		
Total Suspended Solids	Metals	Hydrocarbons
0.8	0.8	0.8

		Typical values from surface run off					Standards		
Parameter	Unit	Roofs			Traffic		Drinking Water ¹	Infiltration ²	ACO QuadraCeptor output ³
		Non metal	Copper	Zinc	Low vehicle turnover ⁴	High vehicle turnover ⁵			

Physico-chemical parameters

Conductivity	uS/cm	25 to 270	25 to 270	25 to 270	50 to 2500	110 to 2500	2500	-	< 1500
pH		4.7 - 6.8	4.7 - 6.8	4.7 - 6.8	6.4 to 8.0	6.4 to 8.0	6.5 - 9.5	-	7.0 – 9.5

Nutrients

Phosphorous, P	mg/L	0.06 to 0.5	0.06 to 0.5	0.06 to 0.5	0.09 to 0.3	0.23 to 0.35	no limit set		0.2
Ammonia/ammonium, NH ₄	mg/L	0.1 to 6.0	0.1 to 6.0	0.1 to 6.0	0 to 1.0	0.5 to 2.3	0.5	-	0.3
Nitrates, NO ₃	mg/L	0.1 to 5.0	0.1 to 5.0	0.1 to 5.0	0 to 16	0 to 16	50	-	*6

Heavy metals

Cadmium, Cd	µg/L	0.2 to 2.5	0.2 to 1.0	0.5 to 2	0.2 to 1.7	0.3 to 13	5	5	<1.0
Zinc, Zn	mg/L	24 to 4900	24 to 900	1700 - 44000	15 to 1500	120 to 2000	no limit set	500	<500 ^{*7}
Copper, Cu	mg/L	0.6 to 3.5	2000 to 8500	11 to 900	21 to 140	97 to 100	2	50	< 50 ^{*7}
Lead, Pb	µg/L	2 to 500	2 to 500	4 to 300	70 to 170	11 to 525	10	25	<25
Nickel, Ni	µg/L	2 to 7	2 to 7	2 to 7	4 to 70	4 to 70	20	50	<20
Chromium, Cr	µg/L	2 to 6	2 to 6	2 to 6	6 to 50	6 to 50	50	50	<50

Organic substances

Polycyclic aromatic hydrocarbons, PAH	µg/L	0.4 to 0.6	0.4 to 0.6	2 to 7	0.2 to 17	0.2 to 17	0.1	0.2	<0.2
Total petroleum hydrocarbons, TPH	µg/L	0.1 to 3.0	0.1 to 3.0	2 to 6	0.1 to 6.5	0.1 to 6.5	-	0.2	<0.2
Quadraceptor Model		R1000 (Roof)	Contact ACO ^{*8}		T750 (Traffic)	HT500 (Heavy Traffic)			

^{*1} Water Supply (Water Quality) Regulations 2000. Maximum values shown

^{*2} Control values for infiltration of surface water according to the German Federal Soil Protection Act (1999) and used as the basis for DIBt approval. Maximum values shown.

^{*3} Output values based on average annual loads.

^{*4} e.g. residential streets, office car parks.

^{*5} e.g. highways, supermarket car parks, distribution yards.


^{*6} Nitrate levels are not significantly reduced

^{*7} Values shown are not applicable to copper or zinc roofs where a second treatment stage is required

^{*8} QuadraCeptor solutions are available for removal of high levels of copper or zinc: please contact technical@aco.co.uk or 01462 816666.

Specifiers and Contractors are advised to obtain a copy of the full installation recommendations from www.aco.co.uk, or the ACO Design Services department at technical@aco.co.uk or telephone 01462 816666.

1. This outline guidance assumes that the ACO Quadraceptor unit will be installed with a concrete backfill. Engineering advice should be sought to ensure any site specific conditions are addressed.
2. Quadraceptor units should be stored on firm level ground. Do not drag, drop or roll the units.
3. Excavate a hole to receive the unit, allowing a minimum 300mm thickness of concrete below the unit and 150 mm around the sides, allowing sufficient space for concrete surround to encapsulate the vertical inlet pipework. Allow sufficient working space for the connection of all pipework. Any unstable ground should be removed and replaced. Engineering advice may be necessary. The excavation is to be kept free of water.
4. Prior to installation all filter elements should be removed or covered to prevent contamination or fouling during installation.
5. All concrete used in the installation process must be of minimum grade C20/25. Where necessary, a higher specification concrete mix may be required and engineering advice should be sought. Pour a minimum 300mm thickness of concrete onto the base of the excavation. Whilst the concrete is still wet carefully lower the Quadraceptor unit onto the concrete. Check that the unit is fully supported by the concrete, and that the unit is level, at the correct height and in the correct orientation. Allow the concrete to harden.

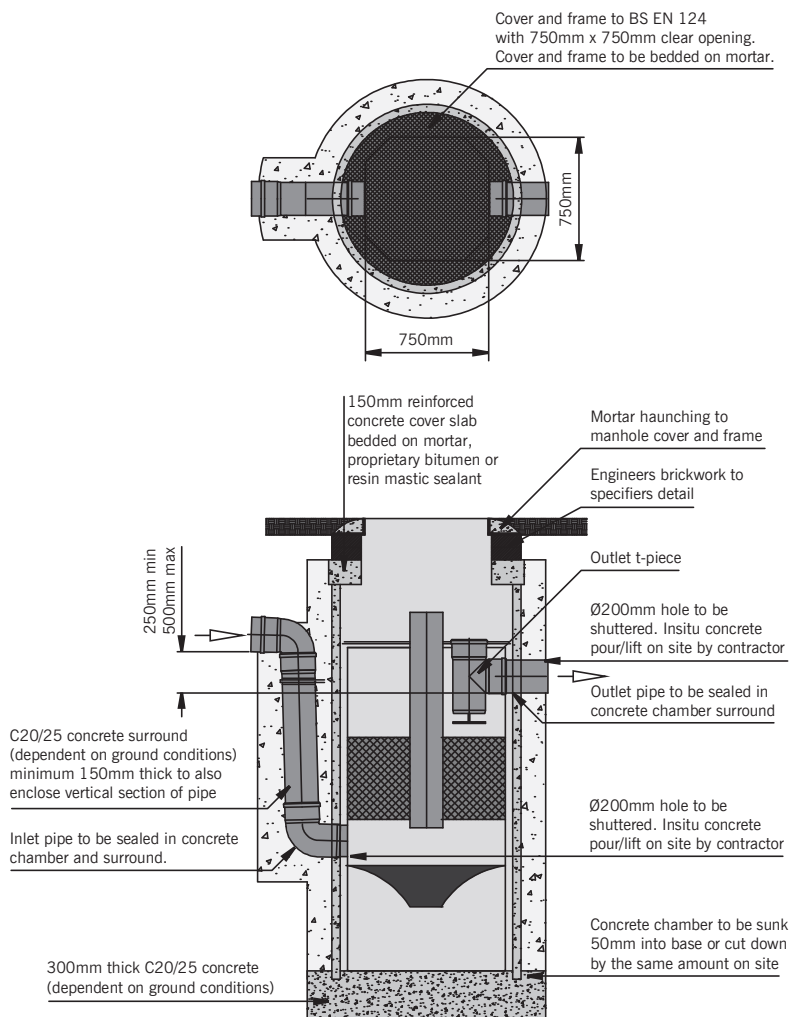

6. The vertical distance from the bottom of the incoming pipework to the bottom of the outlet pipework must be a minimum of 250 mm and a maximum of 500 mm (see outline installation drawing for guidance).
7. Prior to back-filling the excavation, using appropriate concrete mix, all pipework should be connected and sealed to prevent contamination of the system, and any additional shaft rings and top cover put in place.
8. After installation filter elements should be re-installed, or anti-fouling covers removed. The end cap maintenance cover and other buoyancy protective devices should be checked for correct insertion. The T-Piece on the outlet pipework should be connected from the inside of the drainage line (see outline installation drawing for guidance).
9. Prior to commissioning and operation the ACO Quadrceptor must be inspected for proper installation by a competent person.

Maintenance and servicing

To ensure the ACO Quadraceptor surface water runoff treatment system provides continuous and reliable environmental protection it needs appropriate maintenance and servicing. Where a system is correctly maintained in accordance with supplier recommendations the environmental performance will be maintained, otherwise environmental damage and increased liability are likely to be experienced. ACO service partners work closely with the relevant UK Environment Agencies and are able to offer ongoing maintenance and servicing programmes, waste disposal, inspection, testing and full installation and commissioning of water treatment systems and alarms. For further details please contact the ACO Water Management Design Services Team on 01462 816666.

Model specification clause

The water treatment system shall be an ACO Quadraceptor water treatment system, supplied by ACO Water Management. The unit shall be manufactured from High Density Polyethylene and incorporate a filtration system appropriate to the intended end use.

The ACO Quadraceptor surface water treatment system is to be designed and manufactured in conformity with German DIBT requirements and shall be installed in accordance with the manufacturer's recommendations.



NBS Specification

ACO Quadraceptor should be specified in section R12 327. Assistance in completing this clause can be found in ACO Technologies product entries in NBS Plus or a model specification can be downloaded from www.aco.co.uk. For further assistance, contact the ACO Water Management Design Services Team.

ACO Technologies plc

- ACO Water Management
Civils + Infrastructure
Urban + Landscape
- ACO Building Drainage
- ACO Sport
- ACO Wildlife

ACO Water Management: Civils + Infrastructure

A division of ACO Technologies plc
ACO Business Park,
Hitchin Road,
Shefford,
Bedfordshire
SG17 5TE

Tel: 01462 816666
Fax: 01462 815895

e-mail Enquiries: awmenquiries@aco.co.uk
e-mail Sales: customersupport@aco.co.uk
e-mail Technical: technical@aco.co.uk

website: www.aco.co.uk

The ACO Group: A strong family you can depend on.

© October 2018 ACO Technologies plc. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the Company. It is the customer's responsibility to ensure that each product is fit for its intended purpose, and that the actual conditions of use are suitable. This brochure and any advice is provided by ACO Technologies plc (the Company) free of charge and accordingly on terms that no liability including liability for negligence will attach to the Company or its servants or agents arising out of or in connection with or in relation to this brochure or any such advice. Any goods supplied by the Company will be supplied solely upon its standard conditions of sale, copies of which are available on request. The Company's policy of continuous product development and improvement renders specifications liable to modification. Information provided in this brochure is therefore subject to change without prior notification.

Member of:
 **Future Water Association**
informing, innovating, influencing

 **BASEA**
British Airport Services & Equipment Association

 **BMF**
SUPPLIER MEMBER

 **BSI Plus**

 **CPD MEMBER**
Construction CPD
Certification Service

 **RISQS**
QUALIFIED
ID: 34888

 **CHARTER**

 **BSI** **UKAS**
003

ISO 9001
FM 13502

 **BSI** **UKAS**
003

ISO 14001
EMS 538781

 **BSI**

OHSAS 18001
OHS 524145