

Leo CCT LED Polycarbonate Bollard

Supplied c/w Integral Driver




- Modern styled bollard with polycarbonate construction
- White reflector with clear polycarbonate diffuser
- Polycarbonate construction is ideal for coastal applications
- Suitable for domestic and commercial applications
- Supplied c/w root mounting kit, can be surface mounted with rawbolts
- CCT selectable between 3000K and 4000K
- LED lifespan L70 61,000 hours
- Non-dimmable



ALEOLED/CCT/045/GR

ALEOLED/CCT/075/GR

ALEOLED/CCT/100/GR

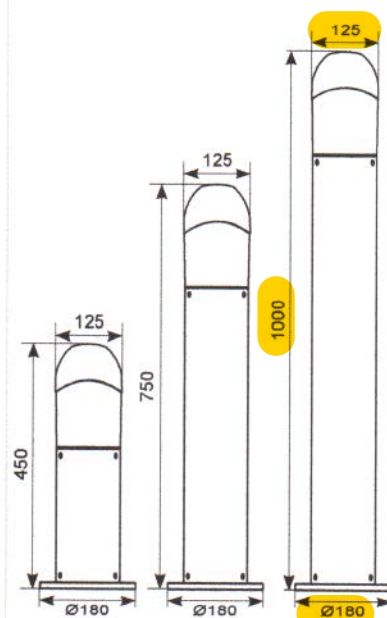

LED Information

Total (Watts)	5W
	10W
	10W

Lumens Delivered	4000K	3000K
5W	420lm	470lm

10W	800lm	850lm
10W	800lm	850lm

Lm/W	
------	--

5W	84lm	94lm
----	------	------

10W	80lm	85lm
-----	------	------

10W	80lm	85lm
-----	------	------

CRI	Ra 65
-----	-------

CCT	3000K
-----	-------

	4000K
--	-------

Input	230V
-------	------

Hertz	50/60Hz
-------	---------

Operating Temp	-20°C to 50°C
----------------	---------------

Code	Lamp	Description
ALEOLED/CCT/045/GR	LED	5W - Warm White/Cool White
ALEOLED/CCT/075/GR	LED	10W - Warm White/Cool White
ALEOLED/CCT/100/GR	LED	10W - Warm White/Cool White

