

WEC

CCTV

camera mounting solutions



comprehensive product guide

**When quality,
delivery, and
installation are
paramount...**

**WEC are the largest
manufacturer of Motorway
CCTV columns for the UK
highway infrastructure**



Sales Direct: +44 (0) 1254 700200

General Enquiries: +44 (0) 1254 773718

Fax: +44 (0) 1254 873637

Website: www.wec.uk.net

Email: all@wec.uk.net

pages 5 - 6	Company Overview
pages 7 - 16	Fixed Towers and Tilt-Over Towers
pages 17 - 22	Fixed Tubular and Tilt-Over Tubular Columns
pages 23 - 32	Fixed Square and Tilt-Over Square Columns
pages 33 - 38	Decorative and Lamp Post Style Columns
pages 39 - 46	Fixed and Tilt-Over Cabinet Base
pages 47 - 50	Anti-Ram and Vandal Resistant Columns
pages 51 - 56	Trolley Poles
pages 57 - 60	Wall Poles
pages 61 - 62	Highway Structures
pages 63 - 64	Cabinets
pages 65 - 80	Accessories
page 81	Root Information
page 82	Miscellaneous - Card Reader / Access Posts
page 83 - 88	Product Gallery
page 89 - 90	Terms and Conditions & Credit Application Form

WEC Camera Mounting Solutions
is a trading division of WEC Group Ltd.





Introduction

WEC has over 30 years of expertise in the design, production and manufacture of CCTV mounting structures. Coupled with a highly skilled engineering background and utilising the very latest in fabrication and assembly technology, WEC's camera mounting division is the number one, unrivalled market leader in the world wide CCTV industry today.

Our engineers use the latest in design technology, including CoCreate modelling and SolidWorks parametric software. Dedicated to the closed circuit television and associated industries, they are able to direct their vast knowledge and skills to produce camera mounting solutions for present and future needs in what is a rapidly growing industry.

The camera mounting division operates from a purpose-built manufacturing site covering 126,000 square feet, enabling us to keep high stock levels and provide short lead times on bespoke products.

LASER

Constant investment programmes enable WEC to acquire the very latest in laser cutting and metal forming technology. Our vast array of modern machinery ensures that we remain market leaders, by providing customers with the highest quality and accuracy offered by any manufacturing company today.

We are also the first company in the UK to purchase the Trumpf TruLaser 7000 Tube machine, which cuts tubes and profiles with large diameters and wall thicknesses without sacrificing productivity.

SPECIAL PRODUCTS

If you don't see a particular column or bracket in our Product Guide, WEC will be only too happy to discuss your requirements. Our bespoke specials service is provided to overcome difficult and awkward mounting situations. Brackets can be constructed from customer photographs or simple sketches through to full engineering drawings. Our production schedule ensures that all special brackets are on site with the minimum of delay.

TRANSPORT

The transport fleet at WEC not only provides a delivery service, but can also offer a column delivery and placement service. We currently deliver and place columns up to 18 metres in height onto prepared bases throughout the UK and Europe. Deliveries can be made to suit your needs and if a situation arises where you require evening, weekend or out of hours deliveries, our efficient transport department will be only too happy to liaise with you.

LOCATION

Situated in the centre of the United Kingdom, WEC is ideally placed to satisfy your requirements. Close to the M6, we are only minutes away from the main motorway network.

Whatever your CCTV camera mounting problem, WEC has the solution for you



PAINTING

Using the latest airless spray techniques coupled with specialist vinyl based coatings, WEC are able to paint your CCTV columns and brackets to any of the BS4800 and RAL colour ranges to suit your requirements. Powder coating facilities are also available on many of our standard and bespoke items.

SALES

Our helpful sales force, with an in-depth knowledge of our products and the industry, ensure that WEC remain the number one choice for CCTV mounting equipment.

WEC offer full training on all of our products whether you are new to the industry or just looking for an update. One of our field sales engineers will pay you a visit to discuss your requirements. Alternatively, we have boardroom facilities for you to bring your clients to discuss your particular project.

PRODUCTS

WEC are the largest manufacture of CCTV mounting structures in the industry today. From simple fixed columns through to tilt-over lattice towers and motorised motorway columns and an endless array of brackets, we are sure that we can supply a camera mounting solution for your particular installation.

MAJOR INSTALLATIONS INCLUDE:

- Wembley Stadium
- Transport for London Charging Scheme
- Railtrack Upgrading
- Dublin Port
- Liverpool City Centre
- Kuwait International Stadium
- Belfast City Stadium
- Birmingham Box ANPR Project
- M42 Lane Sharing Scheme
- Manchester Airport
- Leeds City Centre
- Drax Power Station North Yorkshire
- National Grid Gas Storage Sites

ACCREDITATIONS

WEC are a BS EN ISO9001 and Link-Up approved company. This is your guarantee that goods and services are supplied to you at the highest standards, right first time. Should you require structural calculations, these are available on many of our products, assuring you a safe and stable support for your CCTV system.



Fixed Towers and Tilt-Over Towers ST and WD Range

ST Range

The original fixed tower designed and built by WEC continues to be a popular item. This highly cost-effective modular tower is designed to give excellent stability and wind resistance characteristics. Predominantly installed within secure compound environments, the ST tower displays a business-like appearance many clients prefer.

WD Range

The original fixed tower designed and built by WEC, naturally evolved into the tilt-over tower range. This family of towers offers all the benefits of the ST range, with the added bonus of tiltability for safe ground level maintenance. This highly cost-effective modular tower is designed to give excellent stability and wind resistance characteristics. Predominantly installed within already secure compound environments, the WD tower displays a business-like appearance many clients prefer, with the added feature of safe ground level maintenance.

ST Range

Design Features

- A cost-effective solution for achieving desired camera height.
- Off the shelf heights up to 10 metres.
- Rigid triangular lattice structure ensures excellent stability characteristics.
- Modular construction for ease of transportation and erection.
- Built in climbing rungs for ease of equipment maintenance.
- Hot dipped galvanised finish for maximum weather protection and low maintenance requirements.
- Custom modifications and towers tailored to the customer's requirements.
- Bespoke items in excess of 20 metres.

General Specifications

- Standard pan and tilt fixing of 101.6 PCD.
- Fixings included for telemetry receiver.
- Built in cable entry and exit points.
- Two metre sectional construction.
- Equipment loading up to 25kg.
- Buried root or flange-mounted versions available.
- Standard heights available from 4 to 10 metres.
- Compatible with WEC adaptors, accessories and anti-climbs.

Product Codes

Buried root type:

- ST4
- ST6
- ST8
- ST10

Flange-mounted type:

- ST4AF
- ST6AF
- ST8AF

(all ex-stock items)



Best Seller! ST6 range

WD Range

Design Features

- A cost-effective solution for achieving desired camera height.
- The tilt-over tower enables camera maintenance at ground level.
- An ideal installation where health & safety requirements are paramount.
- Off the shelf heights up to 12 metres.
- Maintenance and servicing easily and safely effected by one engineer.
- Rigid triangular lattice structure ensures excellent stability characteristics.
- Modular construction for ease of transportation and erection.
- A transferable winch unit allows multi-site servicing and leaves installation tamper proof.
- Hot dipped galvanised finish for maximum weather protection and low maintenance requirements.
- Custom modifications and towers tailored to the customer's requirements.
- Heavy Duty versions now available

General Specifications

- Standard pan and tilt fixing of 101.6 PCD.
- Fixings included for telemetry receiver.
- Built in cable entry and exit points.
- Two metre sectional construction (3 metre on larger towers).
- Equipment loading up to 25kg.
- Buried root or flange-mounted versions available.
- Standard heights available from 4 to 12 metres.
- Compatible with WEC adaptors, accessories and anti-climbs.

Product Codes

Buried root type:

- WD4*
- WD6*
- WD8*
- WD10*
- WD10 HD - new!
- WD12
- WD12 HD - new!

Flange-mounted type:

- WD4AF*
- WD6AF*
- WD8AF*
- WD10AF


*Ex-stock items



New Product!! WD12 HD

Technical Specification

Maximum equipment load
on all towers 25kg.

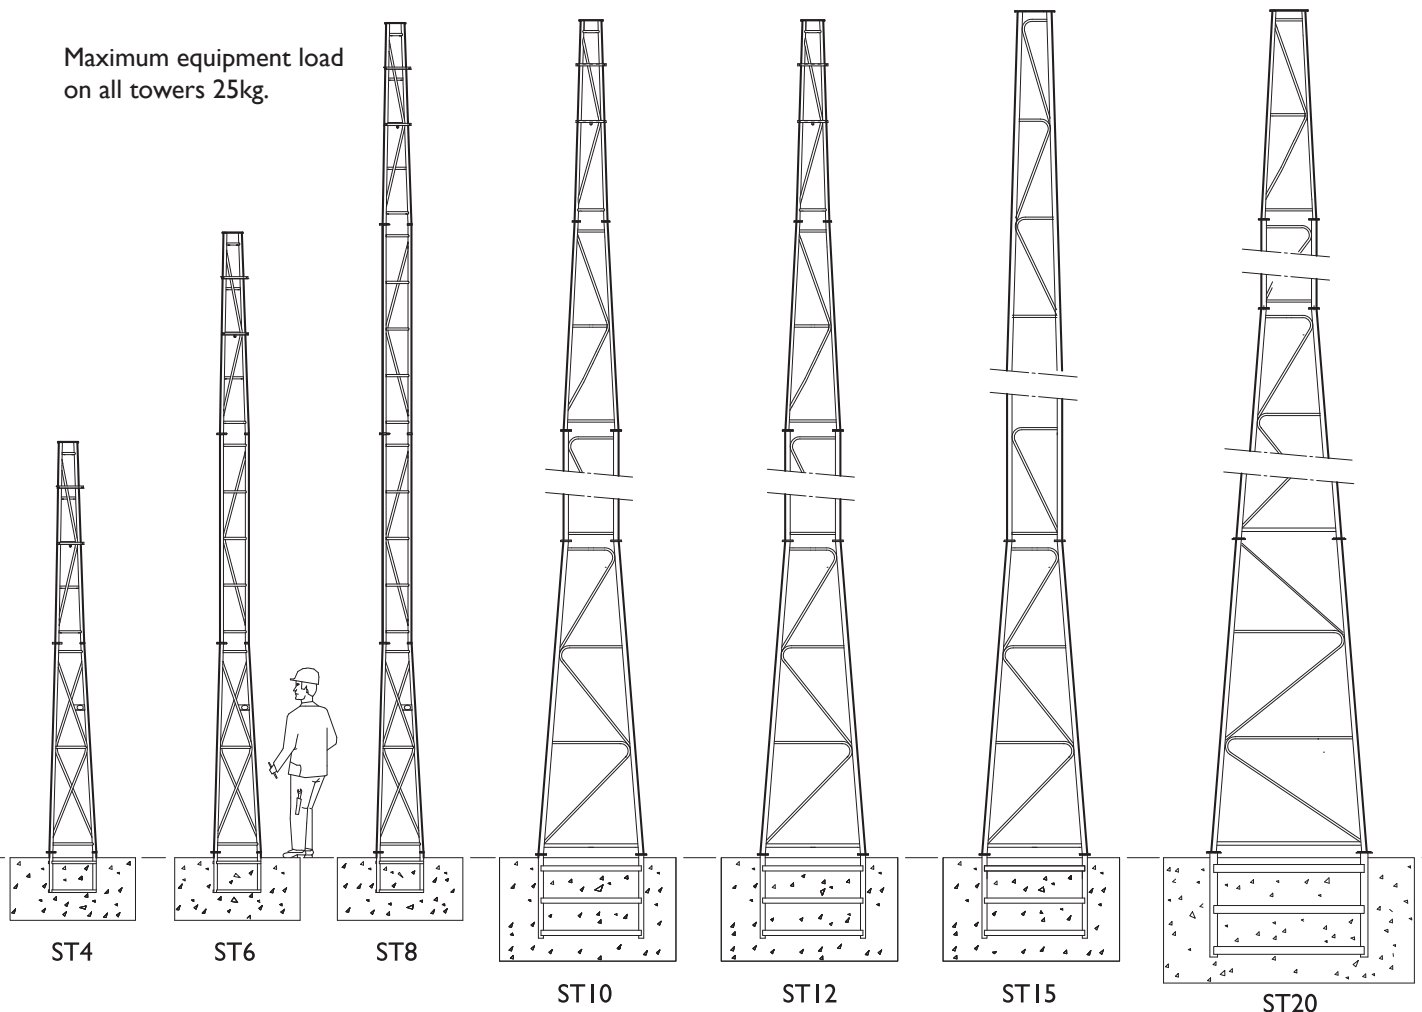

General Specification

- Galvanized for maximum weather protection & low maintenance
- Standard pan and tilt fixings of 101.6 PCD
- Fixings included for telemetry receiver
- Built in cable entry and exit points
- Two and three metre sectional construction
- Equipment loading of up to 25kg
- Buried root or flange-mounted versions available
- Heights available from 4 to 20 metres
- Compatible with WEC adaptors and accessories


Standards Applicable

- Structural Steelwork: BS EN 10210-1:1994, BS EN 10210-2:1997
- General Steelwork: BS1449:1991, BS1387:1985, BS EN 10025:1993
- Hot Dipped Galvanized: BS EN ISO 1461:2009
- Welding Procedures: Comply with BS EN 1011-2:2001
- Fasteners: Grade 8.8 BS3692:2001, BS4190:2001, DIN931, DIN934
- Design Wind Loading: In accordance with CP3 chapter V Pt 2 & BS 6399 Pt 2:1997

Accessories & Adaptors

Part ref.	Description
ST/ACB1	Anti Climb Bracket
ST/ACB1-M	Security mesh welded in lower section
ST/Paint	Painting in BS4800 & RAL colours
STAF	Adaptor Flange Version
ST/SDA	Swept Dome Adaptor
ST/SDA2	Swept Dome Adaptor Dual
ST/TCA	Tower Clamp Adaptor
ST/PT1/S2	1 Pan & Tilt c/w 2 Static Adaptors
ST/TPTA	Twin Pan & Tilt Adaptor
ST/4SA	Quadruple Static Adaptor
ST/3SA	Triple Static Adaptor
ST/2SA	Twin Static Adaptor
ST/1SA	Pan & Tilt - Single fixed
ST/CS150-300	Column Spacers 150mm-300mm
ST/ARB1	Anti ram bollard (cast-in)


Product Ref & Ordering Information



Base and Windload Specification

Concrete Foundation Table X x Y x Z							
Model Ref	Ht.	Area of Country			Area of Town		
		A	B	C	A	B	C
ST4	4m	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.
ST6	6m	1.2x1.2x 0.65m Dp.	1.3x1.3x 0.65m Dp.	1.3x1.3x 0.65m Dp.	1.1x1.1x 0.55m Dp.	1.2x1.2x 0.6m Dp.	1.2x1.2x 0.6m Dp.
ST8	8m	1.3x1.3x 0.65m Dp.	1.4x1.4x 0.7m Dp.	1.4x1.4x 0.7m Dp.	1.3x1.3x 0.65m Dp.	1.4x1.4x 0.7m Dp.	1.4x1.4x 0.7m D.
ST10	10m	1.4x1.4x 0.7m Dp.	1.5x1.5x 0.75m Dp.	1.6x1.6x 0.8m Dp.	1.4x1.4x 0.7m Dp.	1.5x1.5x 0.75m Dp.	1.6x1.6x 0.8m Dp.
ST12	12m	1.8x1.8x 0.9m Dp.	1.9x1.9x 0.95m Dp.	2.0x2.0x 1.0m Dp.	1.7x1.7x 0.85m Dp.	1.8x1.8x 0.9m Dp.	1.9x1.9x 0.95m Dp.
ST15	15m	2.2x2.2x 1.1m Dp.	2.3x2.3x 1.15m Dp.	2.4x2.4x 1.2m Dp.	2.0x2.0x 1.0m Dp.	2.1x2.1x 1.05m Dp.	2.2x2.2x 1.1m Dp.
ST20	20m	2.5x2.5x 1.25m Dp.	2.7x2.7x 1.35m Dp.	2.8x2.8x 1.0m Dp.	2.4x2.4x 1.2m Dp.	2.6x2.6x 1.3m Dp.	2.7x2.7x 1.35m Dp.


A minimum soil bearing pressure of 75 KN/m² is assumed

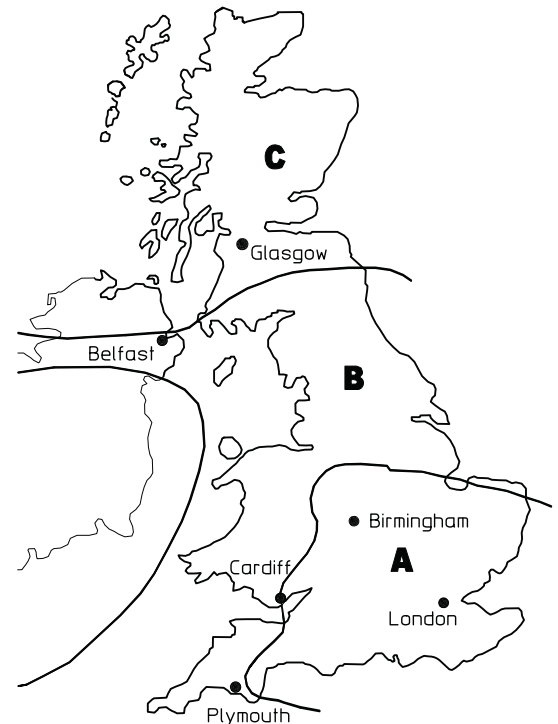

Installation Method


1. From the map, select location of installation
2. Excavate as per recommended area and depth
3. Assemble root base as shown in fig. 1
4. Place cable duct in position, if required, and firmly secure
5. Support root in the excavation using locally supplied timber or similar
6. Ensure all three mounting pads are level and protruding 45mm to 50mm above finished concrete level
7. Pour in concrete, ensuring a mix of C35 to table 6 BS 8110, tamp down and level surface
8. Check that all three pads are still level and leave to cure for a minimum of 72 hours prior to erecting the tower

Buried Root Type

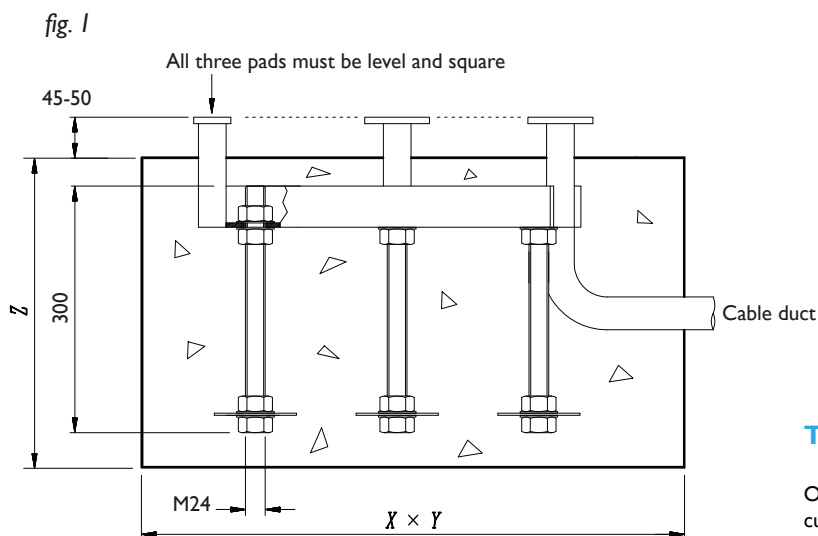

Adaptor plate for fixing tower to existing concrete

Surface Mounted Type (STAF)

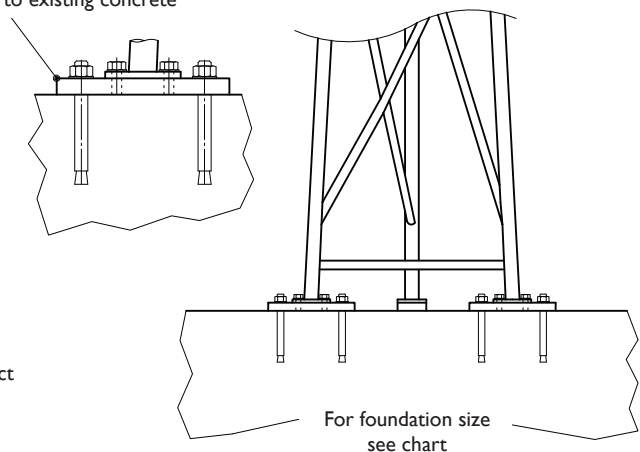

Technical Support

Our in-house design facility enables us to manufacture towers to any customer specification. The technical sales department will offer expert advice on any exact requirements. Full training and instruction on the erection of towers, fixings, safe use and procedures is available on all WEC products. Project engineers, installation teams and service engineers, will all benefit from practical demonstrations, all of which can be shown on our own test site facility.

Technical Specification


General Specification

- Galvanized for maximum weather protection & low maintenance
- Standard pan and tilt fixings of 101.6 PCD
- Fixings included for telemetry receiver
- Built in cable entry and exit points
- Two and three metre sectional construction
- Equipment loading of up to 25kg
- Buried root or flange-mounted versions available
- Heights available from 4 to 12 metres
- Compatible with WEC adaptors and accessories

Safety Notice

It is important that all operatives are familiar with all operating instructions and procedures.

Maximum equipment load on all towers 25kg.

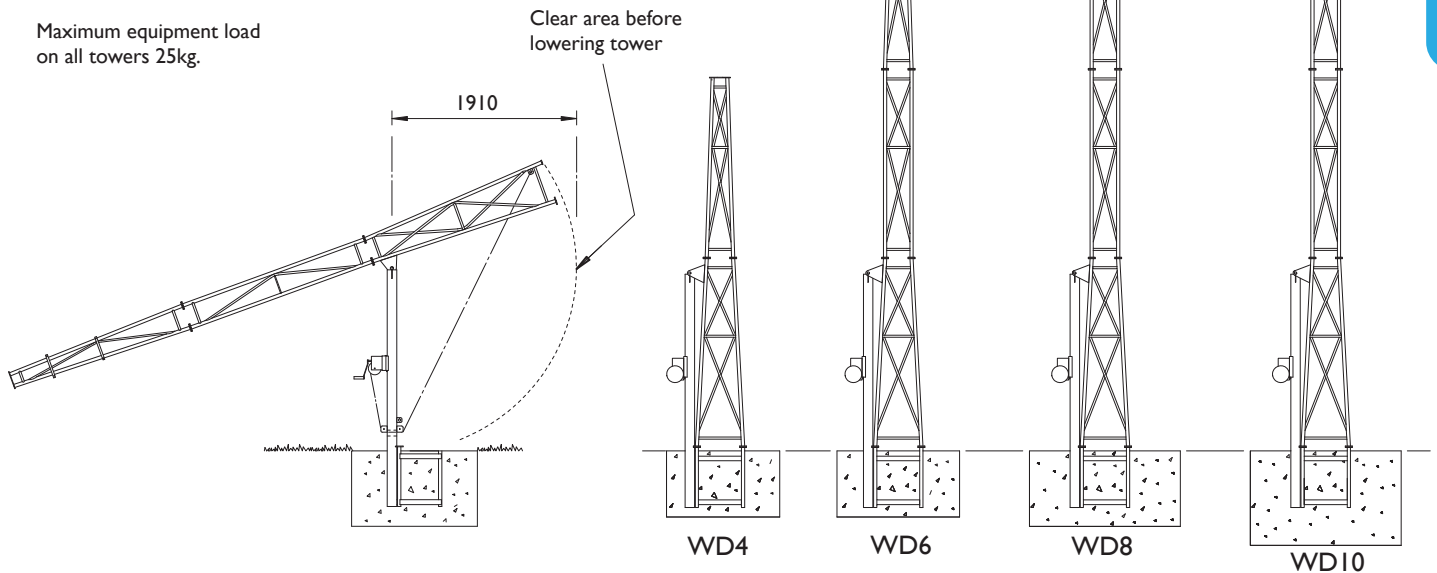

Standards Applicable

- Structural Steelwork: BS EN 10210-1:1994, BS EN 10210-2:1997
- General Steelwork: BS1449:1991, BS1387:1985, BS EN 10025:1993
- Hot Dipped Galvanized: BS EN ISO 1461:2009
- Welding Procedures: Comply with BS5135:1984
- Fasteners: Grade 8.8 BS3692:2001, BS4190:2001, DIN931, DIN934
- Design Wind Loading: In accordance with CP3 chapter V Pt 2 & BS 6399 Pt 2:1997

Transferable winch unit allows reduced cost in multi-site servicing and secure installation.

WUA - Heavy duty
WUB - Light duty

Removable Winches

Although the WUA auto brake winch is initially more expensive, it has the versatility to cover the range of WEC products and has a quicker operating action.

Ht.	Winch Selection	
4m	WUA	WUB
6m	WUA	WUB
8m	WUA	—
10m	WUA	—

Accessories & Adaptors	
Part ref.	Description
WD/ACB1	Anti Climb Bracket
WD/ACB1-M	Security mesh welded in lower section
WD/Paint	Painting in BS4800 & RAL colours
WDAF	Adaptor Flange Version
WD/SDA	Swept Dome Adaptor
WD/SDA2	Swept Dome Adaptor Dual
WD/TCA	Tower Clamp Adaptor
WD/PT1/S2	1 Pan & Tilt c/w 2 Static Adaptors
WD/TPTA	Twin Pan & Tilt Adaptor
WD/4SA	Quadruple Static Adaptor
WD/3SA	Triple Static Adaptor
WD/2SA	Twin Static Adaptor
WD/1SA	Pan & Tilt - Single fixed
WD/CS150-300	Column Spacers 150mm-300mm
WD/ARB1	Anti ram bollard (cast-in)

Scan this code on your smartphone to access our Product Operating Instructions and Videos or please visit our website




Product Ref & Ordering Information

WD 8 AF
Wind down
Tower height in metres
Adaptor flange

Base and Windload Specification

Concrete Foundation Table X x Y x Z							
Model Ref	Ht.	Area of Country			Area of Town		
		A	B	C	A	B	C
WD4	4m	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.
WD6	6m	1.2x1.2x 0.6m Dp.	1.3x1.3x 0.65m Dp.	1.3x1.3x 0.65m Dp.	1.2x1.2x 0.6m Dp.	1.2x1.2x 0.6m Dp.	1.2x1.2x 0.6m Dp.
WD8	8m	1.3x1.3x 0.65m Dp.	1.4x1.4x 0.7m Dp.	1.4x1.4x 0.7m Dp.	1.3x1.3x 0.65m Dp.	1.4x1.4x 0.7m Dp.	1.4x1.4x 0.7m Dp.
WD10	10m	1.4x1.4x 0.7m Dp.	1.5x1.5x 0.75m Dp.	1.6x1.6x 0.8m Dp.	1.5x1.5x 0.75m Dp.	1.5x1.5x 0.75m Dp.	1.6x1.6x 0.8m Dp.

A minimum soil bearing pressure of 75 KN/m² is assumed

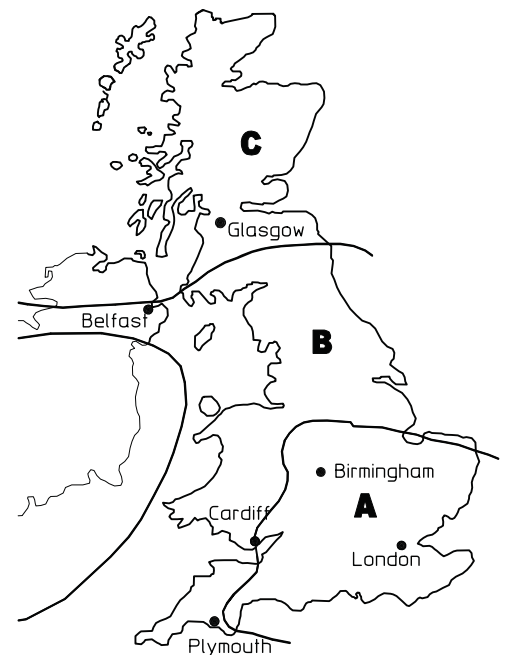

Installation Method

1. From the map, select location of installation
2. Excavate as per recommended area and depth
3. Assemble root base as shown in fig. 1
4. Place cable duct in position, if required, and firmly secure
5. Support root in the excavation using locally supplied timber or similar
6. Ensure all three mounting pads are level and protruding 45mm to 50mm above finished concrete level
7. Pour in concrete, ensuring a mix of C35 to table 6 BS 8110, tamp down and level surface
8. Check that all three pads are still level and leave to cure for a minimum of 72 hours prior to erecting the tower

Technical Support

Our in-house design facility enables us to manufacture towers to any customer specification. The technical sales department will offer expert advice on any exact requirements. Full training and instruction on the erection of towers, fixings, safe use and procedures is available on all WEC products. Project engineers, installation teams and service engineers, will all benefit from practical demonstrations, all of which can be shown on our own test site facility.


Foundation sizes are determined for three sets of wind speeds, which will cover most of the British Isles.

Area A = 44m/s (98mph)
Area B = 48m/s (107mph)
Area C = 52m/s (116mph)


Maximum gust speed is likely to be exceeded on average once every 50 years at 10m above the ground in open level country.

fig. 1


Buried Root Type (WD)

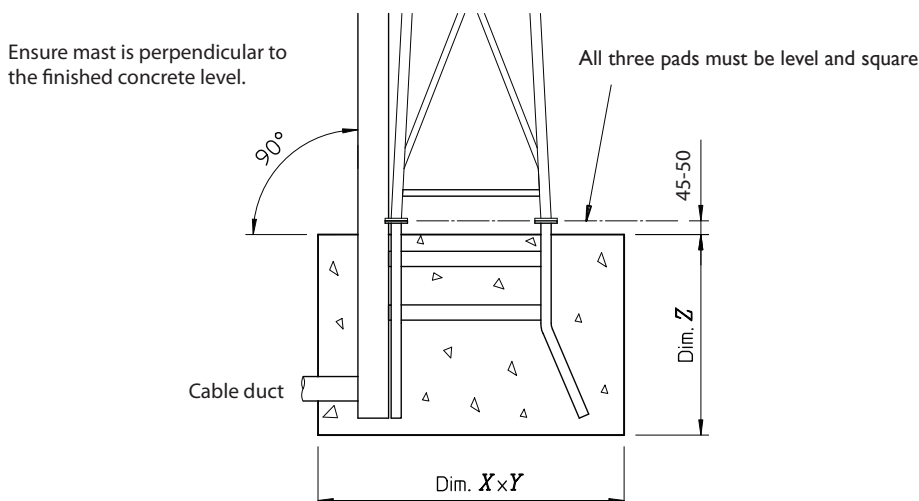

Adaptor Flange Mounted Type

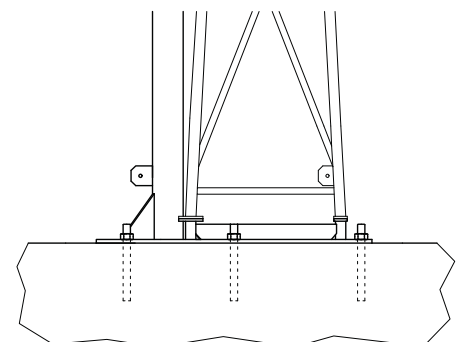

WDT Range *NEW*

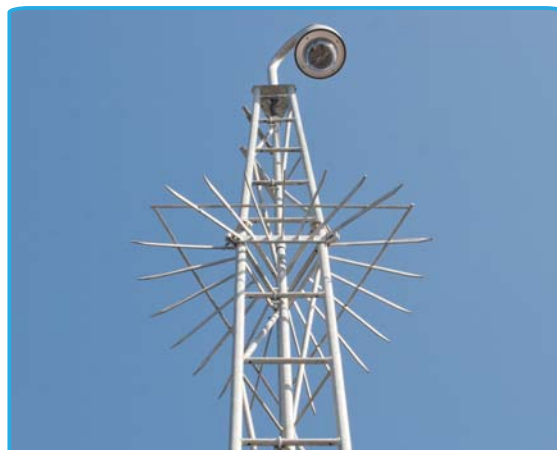

The new WDT tilt-over lattice tower designed and built by WEC is a highly cost-effective camera tower which enables our customers to achieve desired camera height.

Supplied in 2m sections, this triangular Lattice Construction provides excellent stability characteristics for all camera types. The WDT Tower was designed with the installers in mind and is offered with the option of a fully cable management system and flush fitting doors fitted as standard on the 4m and 6m models.

Features:

- Fully Cable Managed Facility (Optional)
- Flush Fitting Door for additional security on the 4m and 6m models
- Easier Maintenance
- Sectional Construction for ease of installation and shipping
- Standard Heights 4, 6, and 8m held in stock. Other heights available on request.

WDT Range

Design Features

- Cost effective solution for achieving desired camera height.
- Triangular Lattice Construction provides excellent stability characteristics.
- Ideal for exposed environments where stability is of paramount importance.
- Tilt over facility enables camera servicing at ground level by single engineer.
- Base plate mounting providing quick and easy erection.
- Stocked in heights up to 8m.
- Modular Construction in 2m sections allows for easy erection and extension if required.
- Transferable/removable winch unit ensures installations are secure and reduces installation cost.
- Hot dipped galvanised to ISO 1461 for maximum protection against even the harshest environments.
- Towers can be customised to suit customers' specific requirements.

General Specifications

- Standard 101.6mm PCD fixing can be modified on request.
- Bolt down version using a template and bolt set.
- Built in cable entry and exit points.
- Typical equipment loading up to 25kg for greater loads please contact us.
- Standard Heights 4, 6, 8m. Other heights on request.
- Compatible with all WEC accessories.

Product Codes

- WDT4* - new!
- WDT6* - new!
- WDT8* - new!
- WDT10 - new!

*Ex-stock items




WDT8 in Tilt Position

Technical Specification

Safety Notice

It is important that all operatives are familiar with all operating instructions and procedures

Clear area before lowering tower

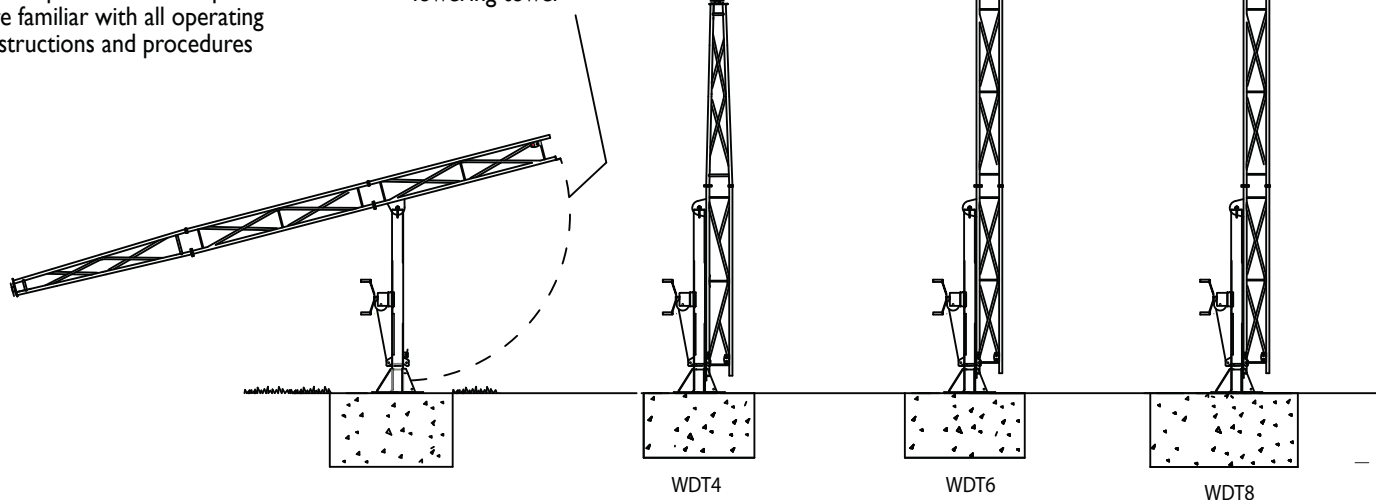

Maximum equipment load on all towers 25Kg.

General Specification

- Galvanized for maximum weather protection & low maintenance
- Standard pan and tilt fixings of 101.6 PCD
- Fixings included for telemetry receiver
- Built in cable entry and exit points
- Two and three metre sectional construction
- Equipment loading of up to 25kg
- Buried root or flange-mounted versions available
- Heights available from 4 to 8 metres
- Compatible with WEC adaptors and accessories

Standards Applicable

- Structural Steelwork: BS EN 10210-1:1994, BS EN 10210-2:1997
- General Steelwork: BS1449:1991, BS1387:1985, BS EN 10025:1993
- Hot Dipped Galvanized: BS EN ISO 1461:2009
- Welding Procedures: Comply with BS EN 1011-2:2001
- Fasteners: Grade 8.8 BS3692:2001, BS4190:2001, DIN931, DIN934
- Design Wind Loading: In accordance with CP3 chapter V Pt 2 & BS 6399 Pt 2:1997

Transferable winch unit allows reduced cost in multi-site servicing and secure installation.

WUA - Heavy duty
WUB - Light duty

Removable Winches


Although the WUA auto brake winch is initially more expensive, it has the versatility to cover the range of WEC products and has a quicker operating action.

Ht.	Winch Selection	
4m	WUA	WUB
6m	WUA	WUB
8m	WUA	—
		—

Accessories & Adaptors

Part ref.	Description
WDT/ACB1	Anti Climb Bracket
WDT/ACB1-M	Security mesh welded in lower section
WDT/Paint	Painting in BS4800 & RAL colours
-----	-----
WDT/SDA	Swept Dome Adaptor
WDT/SDA2	Swept Dome Adaptor Dual
WDT/TCA	Tower Clamp Adaptor
WDT/PT1/S2	1 Pan & Tilt c/w 2 Static Adaptors
WDT/TPTA	Twin Pan & Tilt Adaptor
WDT/4SA	Quadruple Static Adaptor
WDT/3SA	Triple Static Adaptor
WDT/2SA	Twin Static Adaptor
WDT/1SA	Pan & Tilt - Single fixed
WDT/CS150-300	Column Spacers 150mm-300mm
WDT/ARB1	Anti ram bollard (cast-in)


Product Ref & Ordering Information

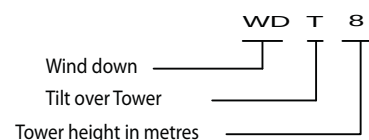

Base and Windload Specification

Concrete Foundation Table X x Y x Z							
Model Ref	Ht.	Area of Country			Area of Town		
		A	B	C	A	B	C
WDT4	4m	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.
WDT6	6m	1.2x1.2x 0.6m Dp.	1.3x1.3x 0.65m Dp.	1.3x1.3x 0.65m Dp.	1.2x1.2x 0.6m Dp.	1.2x1.2x 0.6m Dp.	1.2x1.2x 0.6m Dp.
WDT8	8m	1.3x1.3x 0.65m Dp.	1.4x1.4x 0.7m Dp.	1.4x1.4x 0.7m Dp.	1.3x1.3x 0.65m Dp.	1.4x1.4x 0.7m Dp.	1.4x1.4x 0.7m Dp.

A minimum soil bearing pressure of 75 KN/m² is assumed

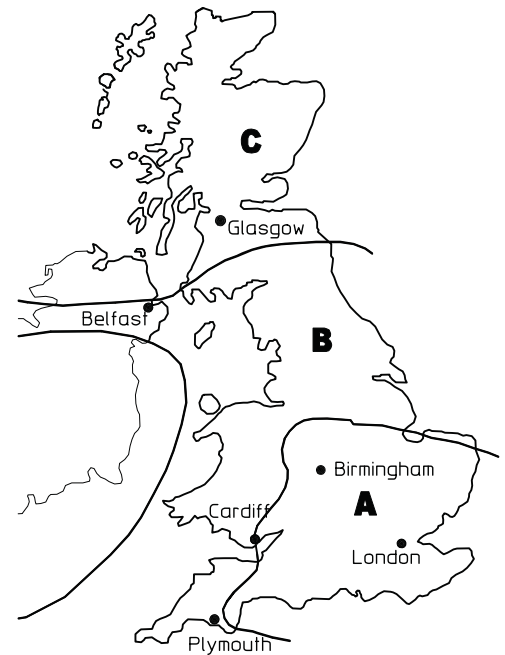

Installation Method

1. From the map, select location of installation
2. Excavate as per recommended area and depth
3. Insert root section into hole as shown in fig. 1
4. Place cable duct in position, if required, and firmly secure
5. Support root in the excavation using locally supplied timber or similar
6. Ensure all three mounting pads are level and protruding 45mm to 50mm above finished concrete level
7. Pour in concrete, ensuring a mix of C35 to table 6 BS 8110, tamp down and level surface
8. Check that all three pads are still level and pivot post is perpendicular
9. Leave to cure for a minimum of 72 hours prior to erecting the tower

Technical Support

Our in-house design facility enables us to manufacture towers to any customer specification. The technical sales department will offer expert advice on any exact requirements. Full training and instruction on the erection of towers, fixings, safe use and procedures is available on all WEC products. Project engineers, installation teams and service engineers, will all benefit from practical demonstrations, all of which can be shown on our own test site facility.

Foundation sizes are determined for three sets of wind speeds, which will cover most of the British Isles.


Area A = 44m/s (98mph)
Area B = 48m/s (107mph)
Area C = 52m/s (116mph)

Maximum gust speed is likely to be exceeded on average once every 50 years at 10m above the ground in open level country.


fig. 1

FM Root
(Standard)

Ensure mast is perpendicular to the finished concrete level.
Check using a spirit level

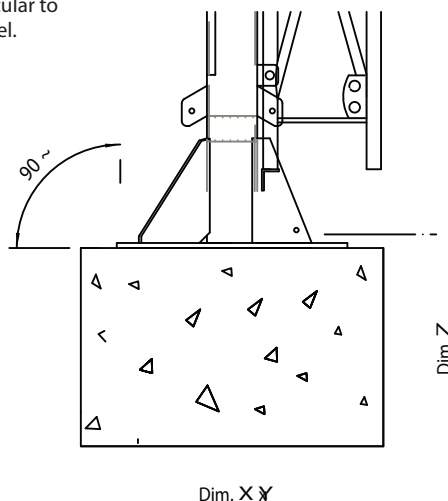

FM Root - Mounted Type
(WDT)

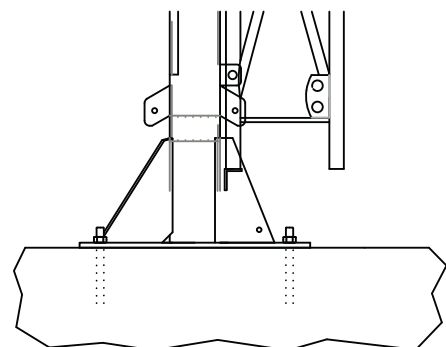

For foundation size
see chart above

Fixed & Tilt-Over Tubular Columns FMT and TPT Range

FMT Range

The highly popular FMT range offers an extremely cost-effective, unobtrusive and practical solution for many camera mounting scenarios. This versatile tubular CCTV column is supplied with a lockable access door and backboard for terminations. Suitable for installation in all areas, this range remains the specifiers preferred choice for the cost-conscious.

TPT Range

The TPT range provides the ultimate in attractive, low maintenance, engineer friendly camera mounting solutions. This CCTV column offers ease of installation, with the major benefit of safe ground level servicing. The TPT range is a robust version of the tilting column, featuring a square section lower post, with a tubular upper section. Suitable for mounting in low risk public areas, the TPT range offers many practical engineering benefits, along with being unobtrusive and aesthetically pleasing.

Sales Direct: +44 (0) 1254 700200

Fax: +44 (0) 1254 873637 Website: www.wec.uk.net Email: all@wec.uk.net

FMT Range

Design Features

- A cost-effective solution for achieving desired camera height.
- Excellent stability characteristics for minimal camera movement.
- Suitable for all public access areas.
- A desirable column where aesthetics are of importance.
- Flange-mounted 'FM' type root.
- Direct buried column versions - 'DB'.
- 'Pocket' type roots available for restricted foundation locations.
- Totally concealed cable management facility.
- Hot dipped galvanised finish for maximum weather protection and low maintenance requirements.
- Custom and bespoke versions tailored to the customer's requirements.
- Clamp on camera brackets available.

General Specifications

- Standard pan and tilt fixing of 101.6 PCD.
- Inspection/jointing aperture with backboards as standard.
- Compatible with WEC adaptors, accessories and anti-climbs.
- Equipment loading up to 25kg.
- Variety of standard heights up to 12 metres.
- Camera mount bracket adaptors available.
- Heavy Duty versions now available

Product Codes

Tubular Columns:

- FMT3*
- FMT4*
- FMT5*
- FMT5 HD* - new!
- FMT6*
- FMT6 HD* - new!
- FMT8*
- FMT8 HD - new!
- FMT10
- FMT10 HD - new!
- FMT12

*Ex-stock items

- DBT3
- DBT4
- DBT5
- DBT6
- DBT8
- DBT10
- DBT5HD
- DBT6HD
- DBT8HD
- DBT10HD



Best Seller! FMT6

TPT Range

Design Features

- Solid and practical designs.
- The tilt-over column enables camera maintenance at ground level.
- Ideal installations where health & safety requirements are paramount.
- Maintenance and servicing easily and safely effected by one engineer.
- Rigid structure ensures excellent stability characteristics.
- A transferable winch unit allows multi-site servicing and leaves installation tamper proof.
- A desirable column where aesthetics are of importance.
- Flange-mounted 'FM' type root.
- 'Pocket' type roots available for restricted foundation locations.
- Totally concealed cable management facility.
- Hot dipped galvanised finish for maximum weather protection and low maintenance requirements.
- Custom and bespoke versions tailored to the customer's requirements.
- Bespoke items available.

General Specifications

- Standard pan and tilt fixing of 101.6 PCD.
- Built in cable entry and exit points.
- Compatible with WEC adaptors, accessories and anti-climbs.
- Equipment loading up to 25kg.
- Variety of standard heights from 4 to 10 metres.
- Heavy Duty versions now available

Product Codes

Tubular Columns:

- TPT4*
- TPT5* - new!
- TPT6*
- TPT6 HD - new!
- TPT8*
- TPT8 HD - new!
- TPT10

*Ex-stock items



Best Seller! TPT6 range


Technical Specification

Model Ref.	'M' Height	Duty rating	Baseplate size 'BxB'	Cable access hole Ø'C'	Tube diameter 'D'	Door aperture 'H' x 'W'	Maximum equip cap'ty	Weight Kgs.
FMT3	3 metres	Standard	450x450	Ø127	Ø139	360 x 90	25Kg.	60Kg.
FMT4	4 metres	Standard	450x450	Ø127	Ø139	360 x 90	25Kg.	75.1Kg.
FMT5	5 metres	Standard	450x450	Ø127	Ø139	360 x 90	25Kg.	120.7Kg.
FMT5HD		Heavy duty	450x450	Ø155	Ø168	360 x 118	25Kg.	142Kg.
FMT6	6 metres	Standard	450x450	Ø127	Ø139	360 x 90	25Kg.	137.3Kg.
FMT6HD		Heavy duty	450x450	Ø155	Ø168	360 x 118	25Kg.	162.1Kg.
FMT8	8 metres	Standard	450x450	Ø155	Ø168	360 x 118	25Kg.	196.3Kg.
FMT8HD		Heavy duty	450x450	Ø200	Ø219	460 x 118	25Kg.	244.9Kg.
FMT10	10 metres	Standard	450x450	Ø200	Ø219	460 x 118	25Kg.	317.5Kg.
FMT10HD		Heavy duty	450x450	Ø250	Ø273	556 x 214	25Kg.	469.3Kg.
FMT12	12 metres	Standard	450x450	Ø250	Ø273	556 x 214	25Kg.	552.1Kg.

All dimensions in mm unless otherwise stated

Standards Applicable

- Structural Steelwork: BS EN 10210-1:1994, BS EN 10210-2:1997
- General Steelwork: BS1449:1991, BS1387:1985, BS EN 10025:1993
- Hot Dipped Galvanized: BS EN ISO 1461:2009
- Welding Procedures: Comply with BS EN 1011-2:2001
- Fasteners: Grade 8.8 BS3692:2001, BS4190:2001 DIN931, DIN934
- Design Wind Loading: In accordance with CP3 chapter V Pt 2 & BS 6399 Pt 2:1997
- Paint Finishes: BS4800 and RAL colour range

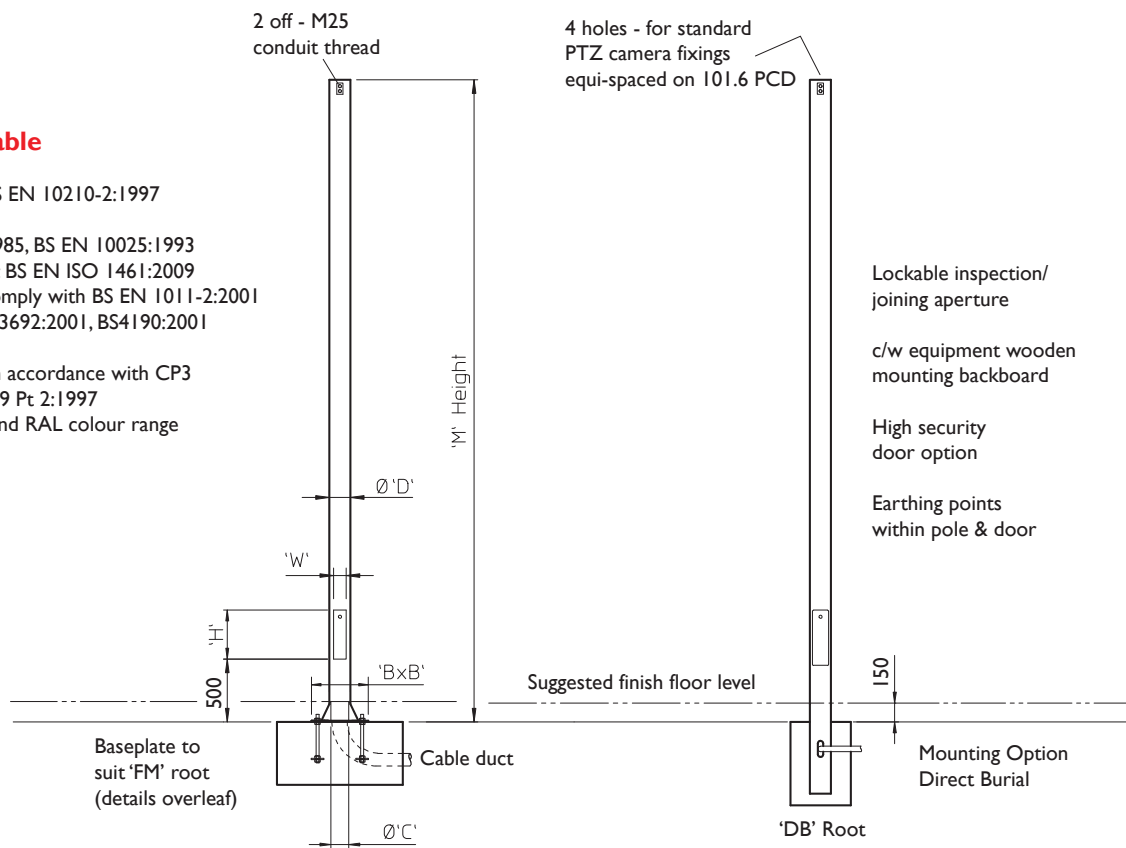


Accessories & Adaptors

- | | |
|------------|------------------------------------|
| FMT/ACB | Anti-Climb Bracket |
| FMT/Paint | Paint to BS4800 & RAL Colours |
| FMT/SDA | Swept Dome Adaptor |
| FMT/SDA2 | Swept Dome Adaptor Dual |
| FMT/PTI-S2 | 1 Pan & Tilt c/w 2 Static Adaptors |
| FMT/TPTA | Twin Pan & Tilt Adaptor |
| FMT/4SA | Quadruple Static Adaptor |
| FMT/3SA | Triple Static Adaptor |
| FMT/2SA | Twin Static Adaptor |
| FMT/ISA | Pan & Tilt - Single Fixed |

- | | |
|---------------|----------------------------|
| FMT/CSI50-300 | Column Spacers 150mm-300mm |
| FMT/TBC | Telemetry Clamp Bracket |
| FMT/HSD-F | High Security Door Option |
| FMT/DB | Decorative Banding |

Product Ref & Ordering Information

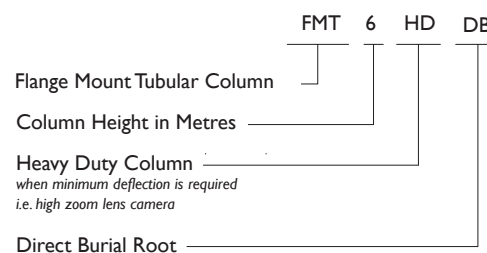

Base and Windload Specification

Concrete Foundation Table X x Y x Z							
Model Ref	Ht.	Area of Country			Area of Town		
		A	B	C	A	B	C
FMT4 FMT4HD	4m	0.8x0.8x 0.4m Dp.	0.9x0.9x 0.45m Dp.	0.9x0.9x 0.45m Dp.	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.
FMT5 FMT5HD	5m	0.9x0.9x 0.45m Dp.	0.9x0.9x 0.45m Dp.	1.0x1.0x 0.5m Dp.	0.9x0.9x 0.45m Dp.	0.9x0.9x 0.45m Dp.	0.9x0.9x 0.45m Dp.
FMT6 FMT6HD	6m	1.1x1.1x 0.55m Dp.	1.1x1.1x 0.55m Dp.	1.2x1.2x 0.6m Dp.	1.0x1.0x 0.5m Dp.	1.1x1.1x 0.55m Dp.	1.1x1.1x 0.55m Dp.
FMT8 FMT8HD	8m	1.3x1.3x 0.65m Dp.	1.4x1.4x 0.7m Dp.	1.4x1.4x 0.7m Dp.	1.2x1.2x 0.6m Dp.	1.3x1.3x 0.65m Dp.	1.3x1.3x 0.65m Dp.
FMT10 FMT10HD	10m	1.5x1.5x 0.75m Dp.	1.6x1.6x 0.8m Dp.	1.6x1.6x 0.8m Dp.	1.4x1.4x 0.7m Dp.	1.5x1.5x 0.75m Dp.	1.5x1.5x 0.75m Dp.
FMT12	12m	1.7x1.7x 0.85m Dp.	1.8x1.8x 0.9m Dp.	1.9x1.9x 0.95m Dp.	1.5x1.5x 0.75m Dp.	1.6x1.6x 0.8m Dp.	1.7x1.7x 0.85m Dp.

A minimum soil bearing pressure of 75 KN/m² is assumed



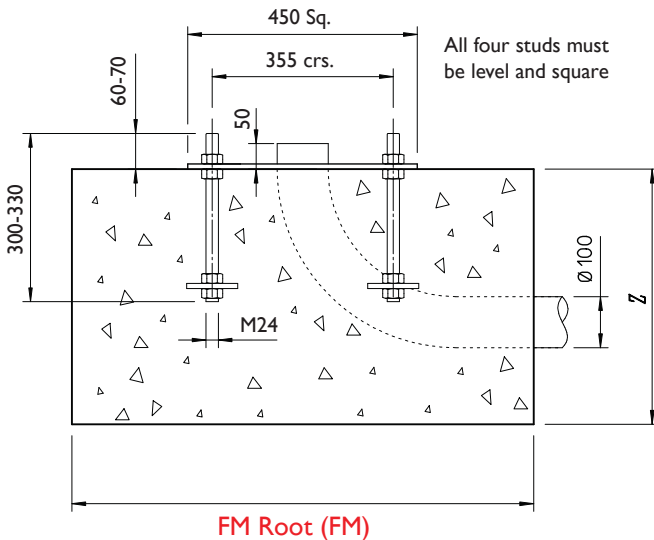


fig. 1

FM Root Assembly

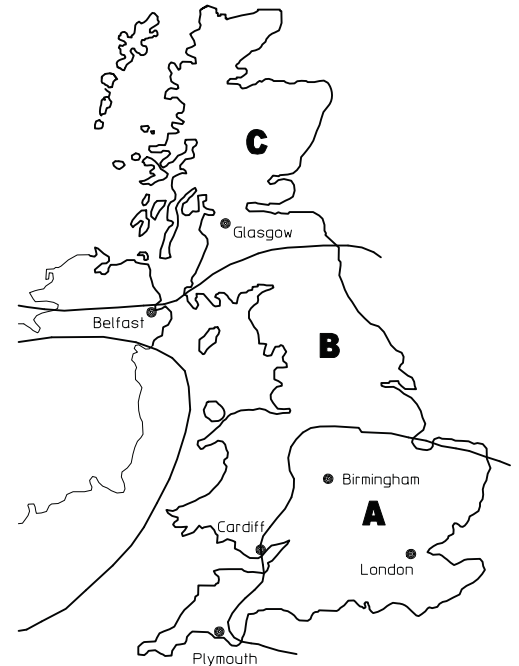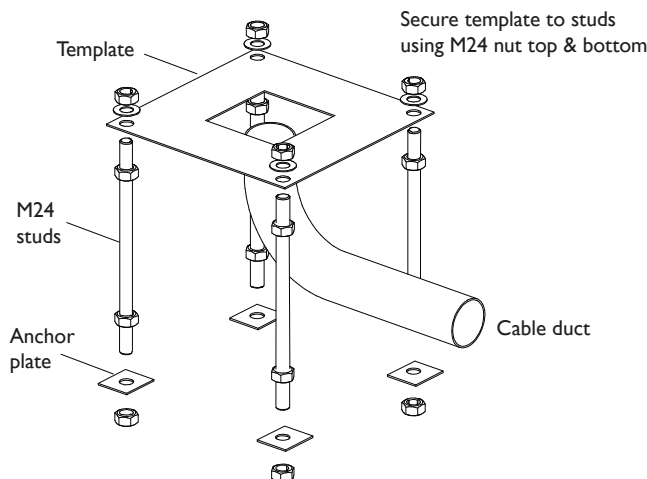

Installation Method

1. From the map, select location of installation
2. Excavate as per recommended area and depth
3. Assemble root base as shown in fig. 1
4. Insert root base into the hole ensuring that it is level and that the four studs protrude 60-70mm above the concrete foundation
5. Fit the cable duct if routing via the interior of the column. A plastic pipe of approximately 100mm outside diameter is recommended for this. Ensure this protrudes through the template by 50mm (min).
6. Pour concrete ensuring that it is a mix of C35 to table 6 BS 8110 and then tamp down well
7. Fit the setting template over the four protruding studs, double-checking that they are level and that clear access can be gained to the cable duct if it is being used.
8. Leave the concrete to cure for a minimum of 72 hours prior to attempting to erect the column
9. When fitting the column, ensure that the concrete base is in complete contact with the underside of column and grout accordingly if required. Torque the nuts to 230-270 Nm (175-200 ft. lb.)
10. When the column has been fitted, protect studs with a suitable protective coating. Denzo tape or similar is recommended for this.

Foundation sizes are determined for three sets of wind speeds, which will cover most of the British Isles.

Area A = 44m/s (98mph)
Area B = 48m/s (107mph)
Area C = 52m/s (116mph)


Maximum gust speed is likely to be exceeded on average once every 50 years at 10m above the ground in open level country.

Technical Specification

Model Ref.	Height 'M'	Tilting rear clearance 'R'	Post Section 'P'	Pivot Section 'S1'	Door aperture 'H' x 'W'	Cable access hole Ø'C'	Maximum equip cap'ty	Weight Kgs.	Winch Selection
TP4T	4 mtr.	1150	120x120	Ø114	325 x 105	Ø108	25Kg.	92 Kgs.	WUA or WUB
TP5T	5 mtr.	1150	120x120	Ø114	325 x 105	Ø108	25Kg.	100Kgs.	WUA or WUB
TP6T	6 mtr.	1150	120x120	Ø114	325 x 105	Ø108	25Kg.	140Kgs.	WUA or WUB
TP8T	8 mtr.	1650	150x150	Ø139	325 x 105	Ø140	25Kg.	305Kgs.	WUA
TP10T	10 mtr.	2150	200x200	Ø193	325 x 105	Ø200	25Kg.	335Kgs.	WUA

All dimensions in mm unless otherwise stated

TPT/WUA Heavy Duty
TPT/WUB Light Duty

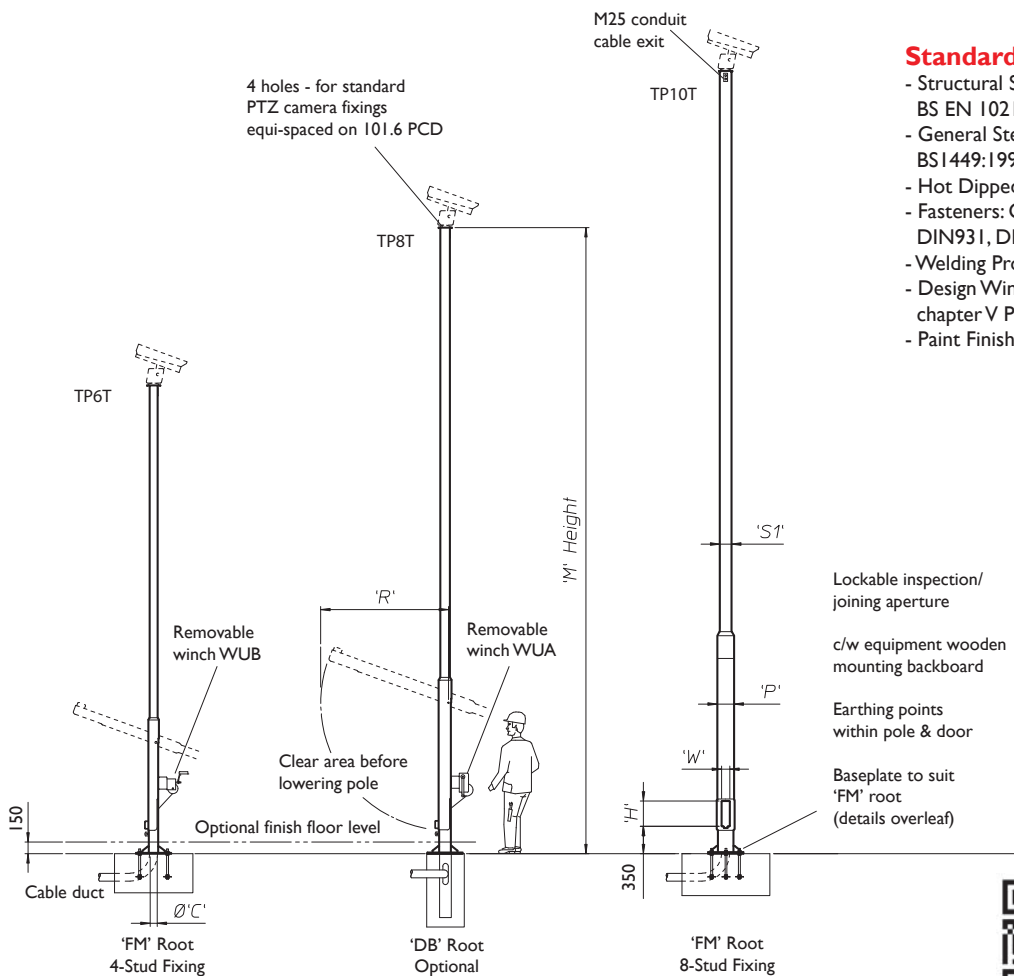

Standards Applicable

- Structural Steelwork: BS EN 10210-1:1994, BS EN 10210-2:1997
- General Steelwork: BS1449:1991, BS1387:1985, BS EN 10025:1993
- Hot Dipped Galvanized: BS EN ISO 1461:2009
- Fasteners: Grade 8.8 BS3692:2001, BS4190:2001 DIN931, DIN934
- Welding Procedures: Comply with BS EN 1011-2:2001
- Design Wind Loading: In accordance with CP3 chapter V Pt 2 & BS 6399 Pt 2:1997
- Paint Finishes: BS4800 and RAL colour range

Accessories & Adaptors

TPT/ACB Anti-Climb Bracket
TPT/Paint Paint to BS4800 & RAL Colours
TPT/SDA Swept Dome Adaptor
TPT/SDA2 Swept Dome Adaptor Dual
TPT/PTI-S2 I Pan & Tilt c/w 2 Static Adaptors
TPT/TPTA Twin Pan & Tilt Adaptor
TPT/3SA Triple Static Adaptor
TPT/2SA Twin Static Adaptor
TPT/ISA Pan & Tilt - Single Fixed

TPT/CS150-300 Column Spacers 150mm-300mm
TPT/TBC Telemetry Clamp Bracket
TPT/HSD-F High Security Door Option
TPT/DB Decorative Banding

Removable Winches

Although the WUA auto brake winch is initially more expensive, it has the versatility to cover the range of WEC products and has a quicker operating action.

Product Ref & Ordering Information

Product (Tilt-Pole) TP 8 T DB
Pole Height in Metres
Section Tubular
Root (Direct Burial)

Tilt-Over Tubular Columns

Tilt-Over Tubular Columns

Tilt-Over Tubular Columns



Tilt-Over Tubular Columns

Tilt-Over Tubular Columns



Tilt-Over Tubular Columns

- ## Tilt-Over Tubular Columns

Tilt-Over Tubular Columns

Tilt-Over Tubular Columns

Tilt-Over Tubular Columns

FMS Range

The ever popular FMS square section range offers an extremely cost-effective, unobtrusive practical solution to many camera mounting scenarios. The versatile columns come complete with lockable access doors and backboard for terminations. Suitable for installation in all areas, this range remains a favourite with specifiers and the cost-conscious.

TPS Range

The TPS range provides undoubtedly one of the best low cost, low maintenance, engineer friendly camera mounting solutions. This CCTV column offers ease of installation, with the major benefit of safe ground level servicing. The TPS range is a light/medium duty version of a tilting column, manufactured throughout from square section steel. Suitable for mounting in low risk public areas, the TPS range offers many practical engineering benefits, along with being unobtrusive and aesthetically pleasing.

FMS Range

Design Features

- A cost-effective solution for achieving desired camera height.
- Excellent stability characteristics for minimal camera movement.
- Suitable for all public access areas.
- A desirable column where aesthetics are of importance.
- Flange-mounted 'FM' type root.
- Direct buried column versions - 'DB'.
- 'Pocket' type roots available for restricted foundation locations.
- Totally concealed cable management facility.
- Hot dipped galvanised finish for maximum weather protection and low maintenance requirements.
- Custom and bespoke versions tailored to the customer's requirements.
- CCTV camera mounts available.
- Heavy Duty versions now available

General Specifications

- Standard pan and tilt fixing of 101.6 PCD.
- Inspection/jointing aperture with backboards as standard.
- Compatible with WEC adaptors, accessories and anti-climbs.
- Equipment loading up to 25kg.
- Variety of standard heights up to 8 metres.

Product Codes

Square Section Columns:

- FMS3*
- FMS4*
- FMS5*
- FMS5 HD - new!
- FMS6*
- FMS6 HD - new!
- FMS8

*Ex-stock items

- DBS3
- DBS4
- DBS5
- DBS6
- DBS8



Best Seller! FMS4

TPS Range

Design Features

- Solid and practical designs.
- The tilt-over column enables camera maintenance at ground level.
- Ideal installation where health & safety requirements are paramount.
- Maintenance and servicing easily and safely effected by one engineer.
- Rigid structure ensures excellent stability characteristics.
- A transferable winch unit allows multi-site servicing and leaves installation tamper proof.
- A desirable column where aesthetics are of importance.
- 'Pocket' type roots available for restricted foundation locations.
- Totally concealed cable management facility.
- Hot dipped galvanised finish for maximum weather protection and low maintenance requirements.
- Custom and bespoke versions tailored to the customer's requirements.
- Bespoke items available.
- Heavy Duty versions now available

General Specifications


- Standard pan and tilt fixing of 101.6 PCD.
- Built in cable entry and exit points.
- Compatible with WEC adaptors, accessories and anti-climbs.
- Equipment loading up to 25kg.
- Variety of standard heights from 4 to 10 metres.

Product Codes

Tubular Columns:

- TPS4*
- TPS5* - new!
- TPS6*
- TPS6 HD - new!
- TPS8*
- TPS8 HD - new!
- TPS10

*Ex-stock items

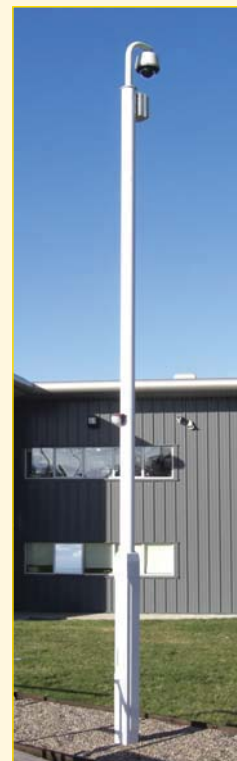

New Stock Item! TPS5


Technical Specification

Model Ref.	'M' Height	Duty rating	Baseplate size 'BxB'	Cable access hole Ø'C'	Section 'S1'	Door aperture 'H' x 'W'	Maximum equip cap'ty	Weight Kgs.
FMS3	3 metres	Standard	450x450	Ø90	100 Sq.	425 x 70	25Kg.	60Kg.
FMS4	4 metres	Standard	450x450	Ø90	100 Sq.	425 x 70	25Kg.	75.1Kg.
FMS5	5 metres	Standard	450x450	Ø90	100 Sq.	425 x 70	25Kg.	120.7Kg.
FMS5HD		Heavy duty	450x450	Ø90	120 Sq.	425 x 80	25Kg.	142Kg.
FMS6	6 metres	Standard	450x450	Ø90	120 Sq.	425 x 80	25Kg.	137.3Kg.
FMS6HD		Heavy duty	450x450	Ø140	150 Sq.	425 x 110	25Kg.	162.1Kg.
FMS8	8 metres	Standard	450x450	Ø90	120 Sq.	425 x 80	25Kg.	196.3Kg.
FMS8HD		Heavy duty	450x450	Ø140	150 Sq.	425 x 110	25Kg.	244.9Kg.

All dimensions in mm unless otherwise stated

Standards Applicable

- Structural Steelwork: BS EN 10210-1:1994, BS EN 10210-2:1997
- General Steelwork: BS1449:1991
- BS1387:1985, BS EN 10025:1993
- Hot Dipped Galvanized: BS EN ISO 1461:2009
- Welding Procedures: Comply with BS EN 1011-2:2001
- Fasteners: Grade 8.8 BS3692:2001, BS4190:2001
- DIN931, DIN934
- Design Wind Loading: In accordance with CP3 chapter V Pt 2 & BS 6399 Pt 2:1997
- Paint Finishes: BS4800 and RAL colour range

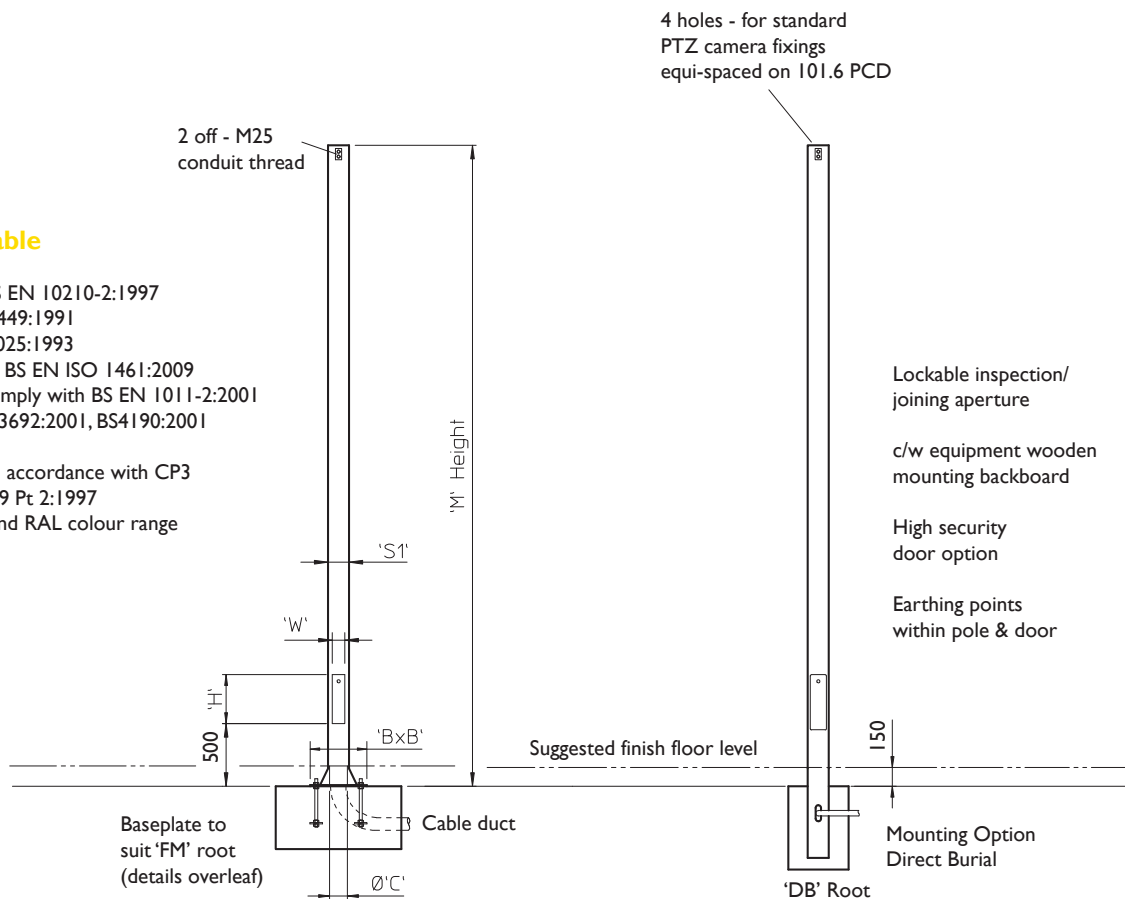


Accessories & Adaptors

FMS/ACB Anti-Climb Bracket
 FMS/Paint Paint to BS4800 & RAL Colours
 FMS/SDA Swept Dome Adaptor
 FMS/SDA2 Swept Dome Adaptor Dual
 FMS/PT1-S2 1 Pan & Tilt c/w 2 Static Adaptors
 FMS/TPTA Twin Pan & Tilt Adaptor
 FMS/4SA Quadruple Static Adaptor
 FMS/3SA Triple Static Adaptor
 FMS/2SA Twin Static Adaptor
 FMS/1SA Pan & Tilt - Single Fixed

FMS/CSI50-300 Column Spacers 150mm-300mm
 FMS/TBC Telemetry Clamp Bracket
 FMS/HSD-F High Security Door Option
 FMS/DB Decorative Banding

Product Ref & Ordering Information

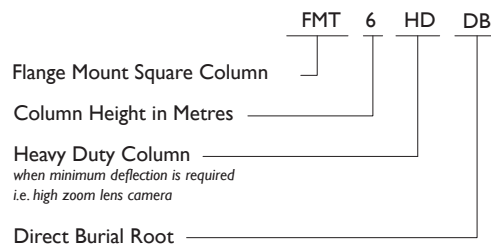

All WEC products are subject to ongoing development. Therefore, we reserve the right to make technical modifications without notice.

Technical Specification

Model Ref.	Height 'M'	Tilting rear clearance 'R'	Post Section 'P'	Pivot Section 'S1'	Door aperture 'H' x 'W'	Cable access hole Ø'C'	Maximum equip cap'ty	Weight Kgs.	Winch Selection
TP4S	4 mtr.	1150	120x120	100x100	325 x 105	Ø108	25Kg.	140Kgs	WUA or WUB
TP5S	5 mtr.	1150	120x120	100x100	325 x 105	Ø108	25Kg.	140Kgs	WUA or WUB
TP6S	6 mtr.	1150	120x120	100x100	325 x 105	Ø108	25Kg.	140Kgs.	WUA or WUB
TP8S	8 mtr.	1650	150x150	120x120	325 x 105	Ø140	25Kg.	305Kgs.	WUA
TP10S	10 mtr.	2150	200x200	150x150	325 x 105	Ø200	25Kg.	335Kgs.	WUA

TPS/WUA Heavy Duty
TPS/WUB Light Duty


All dimensions in mm unless otherwise stated

Standards Applicable

- Structural Steelwork:
BS EN 10210-1:1994, BS EN 10210-2:1997
- General Steelwork: BS1449:1991
BS1387:1985, BS EN 10025:1993
- Hot Dipped Galvanized: BS EN ISO 1461:2009
- Welding Procedures: Comply with BS EN 1011-2:2001
- Fasteners: Grade 8.8 BS3692:2001, BS4190:2001
DIN931, DIN934
- Design Wind Loading: In accordance with CP3 chapter V Pt 2 & BS 6399 Pt 2:1997
- Paint Finishes: BS4800 and RAL colour range



Scan this code on your smartphone to access our Operating Instructions and Videos!

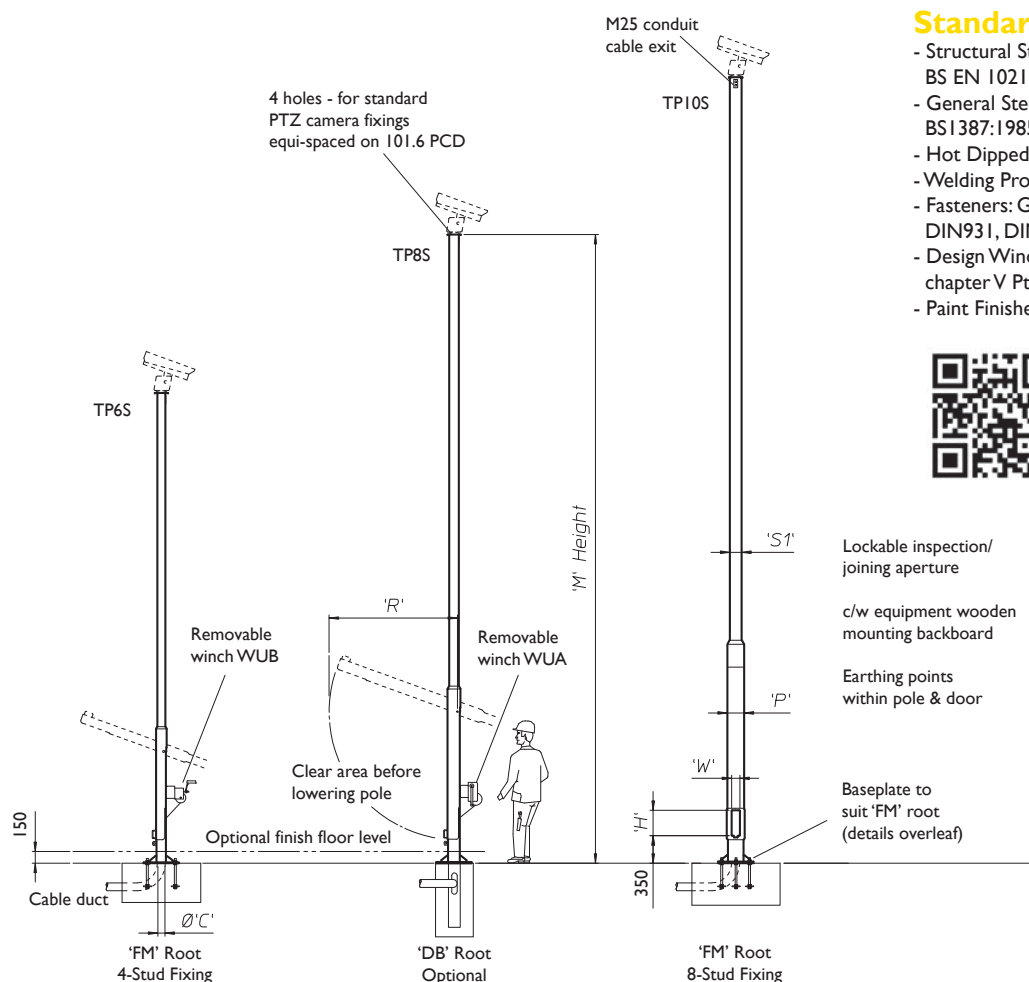

Accessories & Adaptors

TPS/ACB Anti-Climb Bracket
TPS/Paint Paint to BS4800 & RAL Colours
TPS/SDA Swept Dome Adaptor
TPS/SDA2 Swept Dome Adaptor Dual
TPS/PT1-S2 1 Pan & Tilt c/w 2 Static Adaptors
TPS/TPTA Twin Pan & Tilt Adaptor
TPS/3SA Triple Static Adaptor
TPS/2SA Twin Static Adaptor
TPS/ISA Pan & Tilt - Single Fixed

TPS/CSI50-300 Column Spacers 150mm-300mm
TPS/TBC Telemetry Clamp Bracket
TPS/HSD-F High Security Door Option
TPS/DB Decorative Banding

Removable Winches

Although the WUA auto brake winch is initially more expensive, it has the versatility to cover the range of WEC products and has a quicker operating action.


Product Ref & Ordering Information

Product (Tilt-Pole) TP 8 S DB
Pole Height in Metres
Section Square
Root (Direct Burial)

Base and Windload Specification

Concrete Foundation Table X x Y x Z							
Model Ref	Height	Area of Country			Area of Town		
		A	B	C	A	B	C
TP4S	4m	1.0x1.0x 0.5m Dp.	1.1x1.1x 0.55m Dp.	1.1x1.1x 0.55m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.1x1.1x 0.55m Dp.
TP5S	5m	1.0x1.0x 0.5m Dp.	1.1x1.1x 0.55m Dp.	1.1x1.1x 0.55m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.1x1.1x 0.55m Dp.
TP6S	6m	1.0x1.0x 0.5m Dp.	1.1x1.1x 0.55m Dp.	1.1x1.1x 0.55m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.1x1.1x 0.55m Dp.
TP8S	8m	1.2x1.2x 0.6m Dp.	1.3x1.3x 0.65m Dp.	1.3x1.3x 0.65m Dp.	1.1x1.1x 0.55m Dp.	1.2x1.2x 0.6m Dp.	1.3x1.3x 0.65m Dp.
TP10S	10m	1.4x1.4x 0.7m Dp.	1.5x1.5x 0.75m Dp.	1.5x1.5x 0.75m Dp.	1.3x1.3x 0.65m Dp.	1.3x1.3x 0.65m Dp.	1.4x1.4x 0.7m Dp.

A minimum soil bearing pressure of 75 KN/m² is assumed

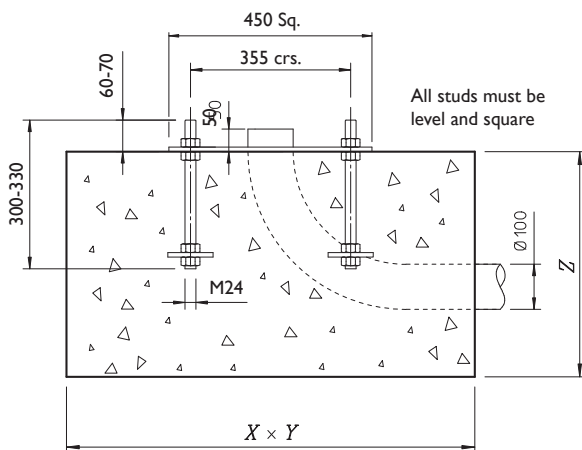


FM Root (FM)

4-hole fixing - up to 8m
8-hole fixing - 10m

fig. 1

FM Root Assembly

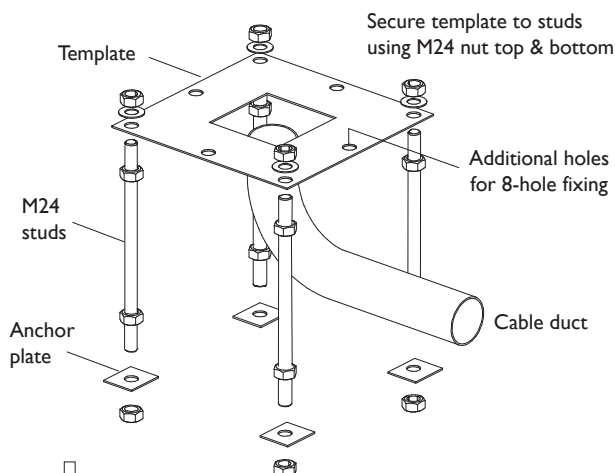

Installation Method

1. From the map, select location of installation
2. Excavate as per recommended area and depth
3. Assemble root base as shown in fig. 1
4. Insert root base into the hole ensuring that it is level and that the four studs protrude 60-70mm above the concrete foundation
5. Fit the cable duct if routing via the interior of the column. A plastic pipe of approximately 100mm outside diameter is recommended for this. Ensure this protrudes through the template by 50mm minimum.
6. Pour concrete ensuring that it is a mix of C35 to table 6 BS 8110 and then tamp down well
7. Fit the setting template over the four protruding studs, double-checking that they are level and that clear access can be gained to the cable duct if it is being used
8. Leave the concrete to cure for a minimum of 72 hours prior to attempting to erect the column
9. When fitting the column, ensure that the concrete base is in complete contact with the underside of the column and grout accordingly.
10. When the column has been fitted, protect the studs with a suitable protective coating. Denzo tape or similar is recommended for this

Foundation sizes are determined for three sets of wind speeds, which will cover most of the British Isles.

Area A = 44m/s (98mph)
Area B = 48m/s (107mph)
Area C = 52m/s (116mph)

Maximum gust speed is likely to be exceeded on average once every 50 years at 10m above the ground in open level country.

MTP Range - *NEW*

The new MTP modular tilt-over square column designed and built by WEC is a highly cost-effective camera column which enables our customers to achieve desired camera height. Supplied in sections for easy assembly and transportation, this square column is a product of choice for our large export market.

The MTP Column was designed with the installers in mind and is offered in heights of 4, 6, and 8m. The newly designed flush fitting door gives added protection against leverage and are fitted as standard.

Features:

- Flush Fitting Door for additional security
- Tilt-over facility for easier maintenance
- Sectional construction for ease of installation and shipping
- Standard Heights 4 and 6m held in stock.
- Easily loaded into shipping containers
- totally concealed cable management facility

MTP Range**Design Features**

- Cost effective solution for achieving desired camera height.
- Modular construction makes this unit ideal for inaccessible areas as sections can usually be by hand.
- Stable structure for all camera types
- Tilt over facility enables camera servicing at ground level by single engineer.
- Modular Construction in sections allows for easy erection and extension if required
- Stocked in heights up to 8m. Other heights on request.
- Lockable access door is provided as standard.
- Transferable/removable winch unit ensures installations are secure and reduces installation cost.
- Hot dipped galvanised to ISO 1461 for maximum protection against even the harshest environments.
- Columns can be customised to suit customers' specific requirements.
- Fully concealed cable pathway.

General Specifications

- Standard 101.6mm PCD fixing can be modified on request.
- Bolt down version using a template and bolt set.
- Built in cable entry and exit points.
- Typical equipment loading up to 25kg for greater loads please contact us.
- Standard Heights 4, 6, 8m. Other heights on request.
- Compatible with all WEC accessories.

Product Codes

- MTP4* - new!
- MTP6* - new!
- MTP8 - new!

*Ex-stock items




WDT8 in Tilt Position

Technical Specification

Model Ref.	Height 'M'	Tilting rear clearance 'R'	Post Section 'P'	Pivot Section 'S1'	Door aperture 'H' x 'W'	Cable access hole Ø'C'	Maximum equip cap'ty	Weight Kgs.	Winch Selection
MTP4	4 mtr.	1300	120x120	100X100	390 x 84	Ø108	25Kg.	121Kgs.	WUA or WUB
MTP6	6 mtr.	1300	120x120	100X100	390 x 84	Ø108	25Kg.	145Kgs.	WUA or WUB
MTP8	8 mtr.	1300	120X120	120X120	390 x 84	Ø108	25Kg.	191Kgs.	WUA or WUB

All dimensions in mm unless otherwise stated

MTP/WUA Heavy duty
MTP/WUB Light duty

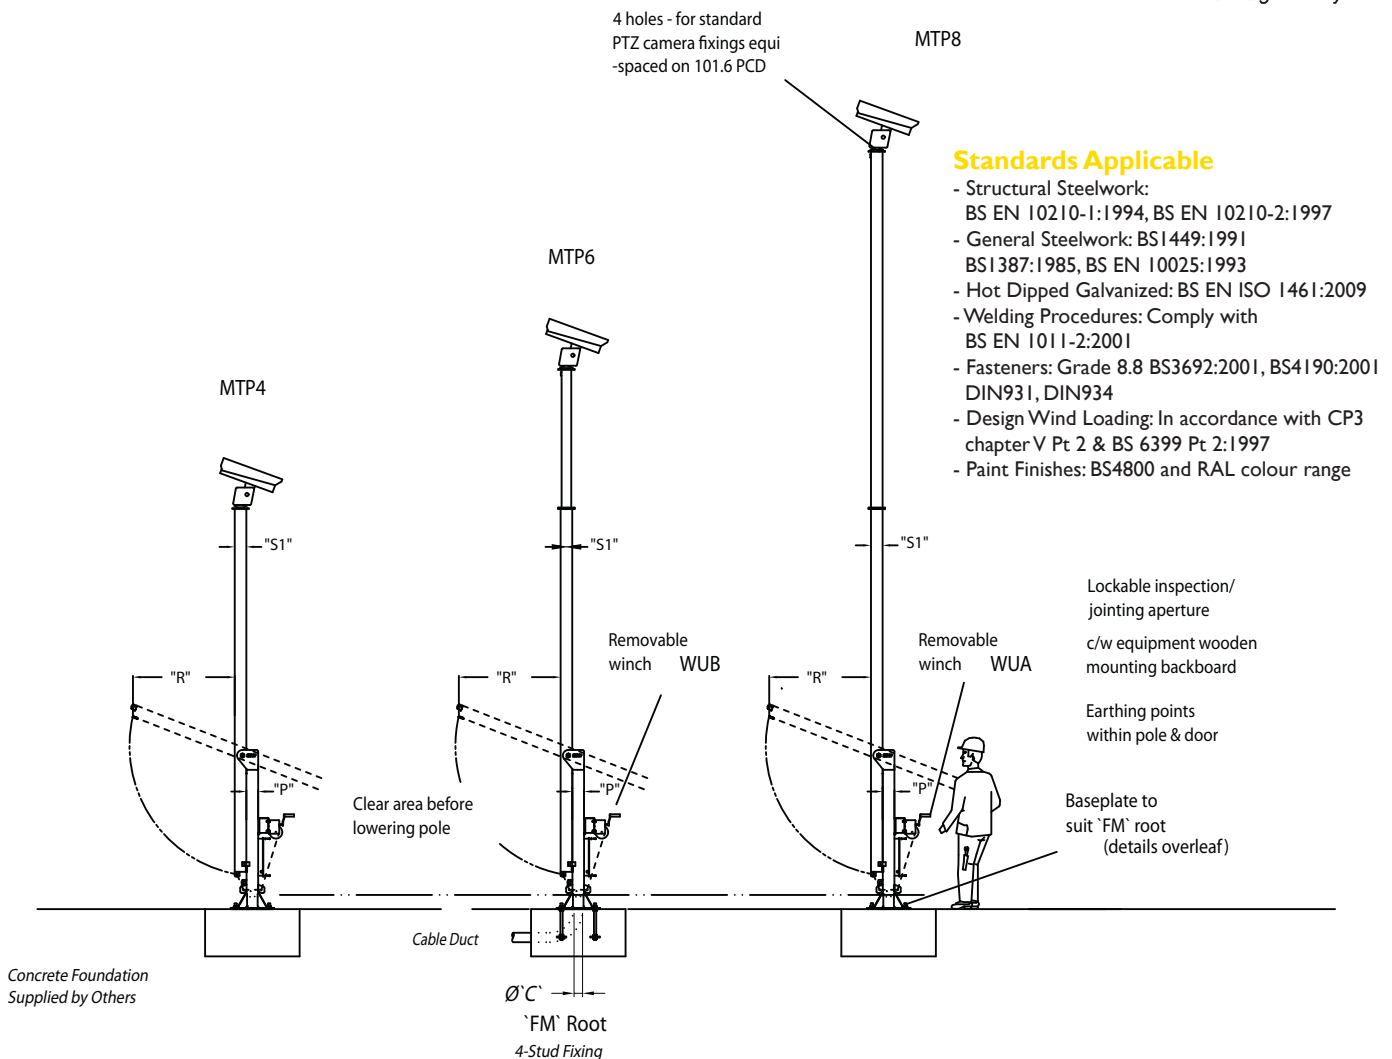

Standards Applicable

- Structural Steelwork: BS EN 10210-1:1994, BS EN 10210-2:1997
- General Steelwork: BS1449:1991, BS1387:1985, BS EN 10025:1993
- Hot Dipped Galvanized: BS EN ISO 1461:2009
- Welding Procedures: Comply with BS EN 1011-2:2001
- Fasteners: Grade 8.8 BS3692:2001, BS4190:2001, DIN931, DIN934
- Design Wind Loading: In accordance with CP3 chapter V Pt 2 & BS 6399 Pt 2:1997
- Paint Finishes: BS4800 and RAL colour range

Concrete Foundation
Supplied by Others


TP_S/ACB	Anti Climb Bracket
TP_S/Paint	Paint to BS4800 & RAL colours
TP_S/SDA	Swept Dome Adaptor
TP_S/SDA2	Swept Dome Adaptor Dual
TP_S/PT1-S2	1 Pan & Tilt c/w 2 Static Adaptors
TP_S/TPTA	Twin Pan & Tilt Adaptor
TP_S/3SA	Triple Static Adaptor

Accessories & Adaptors

TP_S/2SA	Twin Static Adaptor
TP_S/1SA	Pan & Tilt - Single fixed
TP_S/CS150-300	Column Spacers 150mm-300mm
TP_S/TBC	Telemetry clamp bracket

Removable winches
Although the WUA auto brake winch is initially more expensive, it has the versatility to cover all range of WEC products and has a quicker operating action


Product Ref and Ordering Information

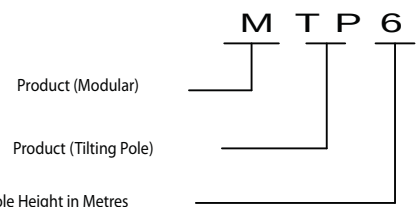

Base and Windload Specification

Concrete Foundation Table X x Y x Z							
Model Ref	Height	Area of Country			Area of Town		
		A	B	C	A	B	C
MTP4	4m	1.0x1.0x 0.5m Dp.	1.1x1.1x 0.55m Dp.	1.1x1.1x 0.55m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.1x1.1x 0.55m Dp.
MTP6	6m	1.0x1.0x 0.5m Dp.	1.1x1.1x 0.55m Dp.	1.1x1.1x 0.55m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.1x1.1x 0.55m Dp.
MTP8	8m	1.2x1.2x 0.6m Dp.	1.3x1.3x 0.65m Dp.	1.3x1.3x 0.65m Dp.	1.1x1.1x 0.55m Dp.	1.2x1.2x 0.6m Dp.	1.3x1.3x 0.65m Dp.

A minimum soil bearing pressure of 75 KN/m² is assumed


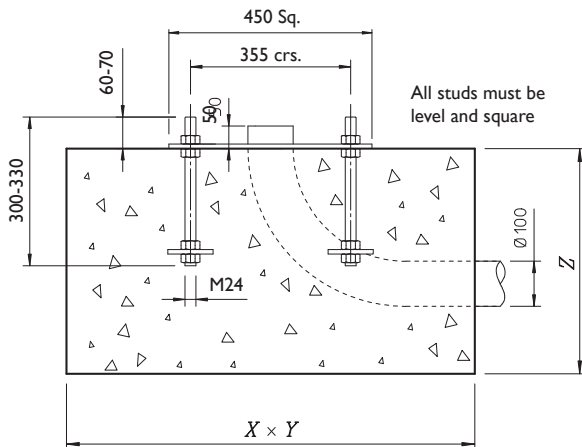


FM Root (FM)

4-hole fixing - up to 8m
8-hole fixing - 10m

fig. 1

FM Root Assembly

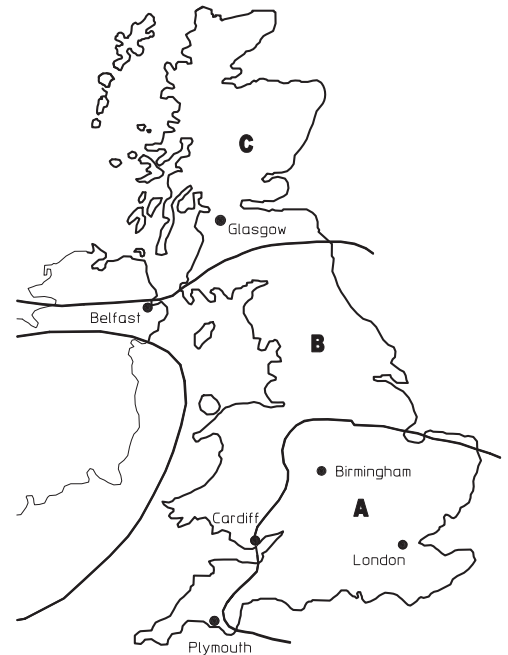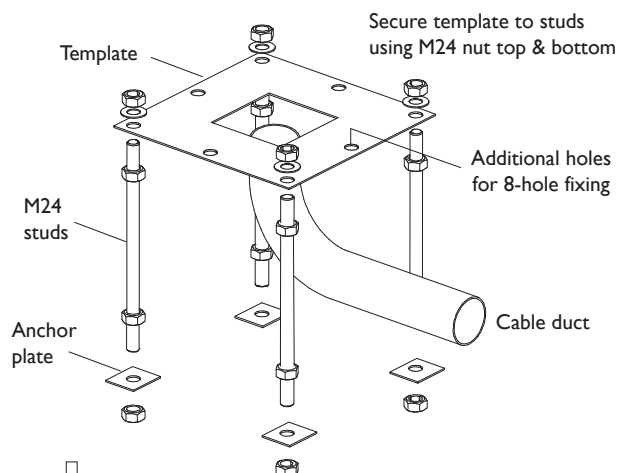

Installation Method

1. From the map, select location of installation
2. Excavate as per recommended area and depth
3. Assemble root base as shown in fig. 1
4. Insert root base into the hole ensuring that it is level and that the four studs protrude 60-70mm above the concrete foundation
5. Fit the cable duct if routing via the interior of the column. A plastic pipe of approximately 100mm outside diameter is recommended for this. Ensure this protrudes through the template by 50mm minimum.
6. Pour concrete ensuring that it is a mix of C35 to table 6 BS 8110 and then tamp down well
7. Fit the setting template over the four protruding studs, double-checking that they are level and that clear access can be gained to the cable duct if it is being used
8. Leave the concrete to cure for a minimum of 72 hours prior to attempting to erect the column
9. When fitting the column, ensure that the concrete base is in complete contact with the underside of the column and grout accordingly.
10. When the column has been fitted, protect the studs with a suitable protective coating. Denzo tape or similar is recommended for this

Foundation sizes are determined for three sets of wind speeds, which will cover most of the British Isles.

Area A = 44m/s (98mph)
Area B = 48m/s (107mph)
Area C = 52m/s (116mph)

Maximum gust speed is likely to be exceeded on average once every 50 years at 10m above the ground in open level country.

FMV Range**LPS Range**

The original and highly popular FMT tubular section range has, over a period of time, evolved into more decorative and aesthetically pleasing versions. The FMV range is the modern day CCTV version of the Victorian gas light column and amongst its features are ornamental cast iron decorations to the base, shoulder and shaft. This 'retro' column is now the consultants and specifiers first choice for heritage sensitive applications. The sister column to the FMV is the LPS. This version of the FMT emulates the traditional street lighting column, whereby the column has a larger circular base section, tapering into the standard shaft. The base section, before tapering into the CCTV shaft, is larger than the normal streetlight and has the ability to house control equipment.

FMV Range

Design Features

- Excellent stability characteristics for minimal camera movement.
- Suitable for all public access areas.
- Highly recommended for heritage sensitive applications.
- Flange-mounted 'FM' type root.
- 'Pocket' type roots available for restricted foundation locations.
- Totally concealed cable management facility.
- Hot dipped galvanised finish for maximum weather protection and low maintenance requirements.
- Custom and bespoke versions tailored to the customer's requirements.

General Specifications

- Standard pan and tilt fixing of 101.6 PCD.
- Inspection/jointing aperture with backboards as standard.
- Compatible with WEC adaptors, accessories and anti-climbs.
- Equipment loading up to 25kg.
- Standard paint finished included on FMV columns.
- Variety of standard heights up to 6 metres.

Product Codes

Victorian Range:

- FMV4
- FMV5
- FMV6



Various colours and finishes available!

LPS Range

Design Features

- Excellent stability characteristics for minimal camera movement.
- A desirable column where aesthetics are of prime importance.
- Suitable for all public access areas.
- Flange-mounted 'FM' type root.
- 'Pocket' type roots available for restricted foundation locations.
- Heavy duty versions available.
- Totally concealed cable management facility.
- Hot dipped galvanised finish for maximum weather protection and low maintenance requirements.
- Custom and bespoke versions tailored to the customer's requirements.

General Specifications

- Standard pan and tilt fixing of 101.6 PCD.
- Inspection/jointing aperture with backboards as standard.
- Compatible with WEC adaptors, accessories and anti-climbs.
- Equipment loading up to 25kg.
- Variety of standard heights up to 10 metres.

Product Codes

Street Light Style Columns:

- LPS4
- LPS5
- LPS6
- LPS8
- LPS10
- LPS8HD
- LPS10HD




Also available in Stainless Steel!


Technical Specification

Model Ref.	'M' Height	Base size 'D1'	Column size 'D2'	Baseplate size 'L x W'	Cable access hole Ø'C'	Door aperture 'H' x 'W'	Maximum equip cap'ty	Weight Kgs.
FMVSA3	3 metres	Ø168	Ø114	450 x 450	Ø200	455 x 110	25Kg.	192Kg.
FMVTU3		Ø193	Ø139	450 x 450	Ø180	360 x 110	25Kg.	175Kg.
TCVWI3		500 Sq.	Ø168	645 x 645	Ø250	746 x 312	25Kg.	216Kg.
FMVSA4	4 metres	Ø168	Ø114	450 x 450	Ø200	455 x 110	25Kg.	208Kg.
FMVTU4		Ø193	Ø139	450 x 450	Ø180	360 x 110	25Kg.	191Kg.
TCVWI4		500 Sq.	Ø168	645 x 645	Ø250	746 x 312	25Kg.	232Kg.
FMVSA6	6 metres	Ø219	Ø139	450 x 450	Ø200	455 x 110	25Kg.	241Kg.
FMVTU6		Ø193	Ø139	450 x 450	Ø180	360 x 110	25Kg.	224Kg.
TCVWI6		500 Sq.	Ø168	645 x 645	Ø250	746 x 312	25Kg.	265Kg.
TCVWI8	8 metres	500 Sq.	Ø168	645 x 645	Ø250	746 x 312	25Kg.	299Kg.
TCVWI10	10 metres	500 Sq.	Ø219	645 x 645	Ø250	746 x 312	25Kg.	333Kg.


All dimensions in mm unless otherwise stated

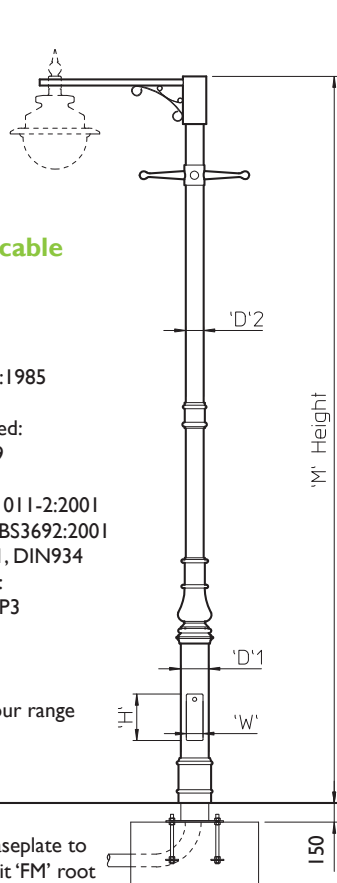

'SA' SALISBURY

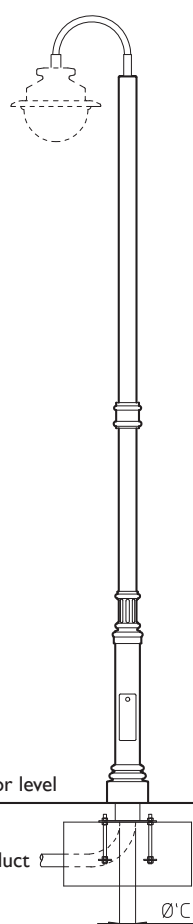

'TU' TURNER

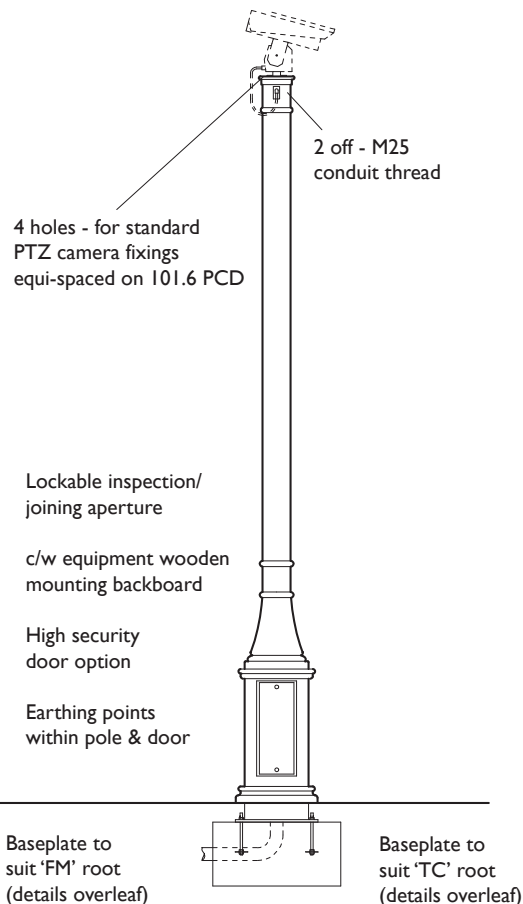

'WI' WINDSOR

Standards Applicable

- Structural Steelwork:
BS EN 10210-1:1994
BS EN 10210-2:1997
- General Steelwork:
BS 1449:1991, BS 1387:1985
BS EN 10025:1993
- Hot Dipped Galvanized:
BS EN ISO 1461:2009
- Welding Procedures:
Comply with BS EN 1011-2:2001
- Fasteners: Grade 8.8 BS 3692:2001
BS 4190:2001, DIN 931, DIN 934
- Design Wind Loading:
In accordance with CP3
chapter V Pt 2 &
BS 6399 Pt 2:1997
- Paint Finishes:
BS 4800 and RAL colour range

Accessories & Adaptors

FMV/ACB Anti-Climb Bracket
FMV/Paint Paint to BS4800 & RAL Colours
FMV/SDA Swept Dome Adaptor
FMV/SDA2 Swept Dome Adaptor Dual
FMV/PT1-S2 1 Pan & Tilt c/w 2 Static Adaptors
FMV/TPTA Twin Pan & Tilt Adaptor
FMV/4SA Quadruple Static Adaptor

FMV/3SA Triple Static Adaptor
FMV/2SA Twin Static Adaptor
FMV/1SA Pan & Tilt - Single Fixed
FMV/CS150-300 Column Spacers 150mm-300mm
FMV/TBC Telemetry Clamp Bracket
FMV/HSD-F High Security Door Option

Triple Static Adaptor
Twin Static Adaptor
Pan & Tilt - Single Fixed
Column Spacers 150mm-300mm
Telemetry Clamp Bracket
High Security Door Option


Product Ref & Ordering Information

FM V TU 6
Flange Mounted Baseplate
Range:Victorian
Model:Turner
Column Height in Metres

Base and Windload Specification





Concrete Foundation Table X x Y x Z							
Model Ref	Height	Area of Country			Area of Town		
		A	B	C	A	B	C
FMVTU3 FMVSA3 TCVWI3	3m	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.
FMVTU4 FMVSA4 TCVWI4	4m	0.9x0.9x 0.45m Dp.	0.9x0.9x 0.45m Dp.	0.9x0.9x 0.45m Dp.	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.	0.9x0.9x 0.45m Dp.
FMVTU5 FMVSA5 TCVWI5	5m	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	0.9x0.9x 0.45m Dp.	0.9x0.9x 0.45m Dp.	1.0x1.0x 0.5m Dp.
FMVTU6 FMVSA6 TCVWI6	6m	1.1x1.1x 0.55m Dp.	1.1x1.1x 0.55m Dp.	1.2x1.2x 0.6m Dp.	1.0x1.0x 0.5m Dp.	1.1x1.1x 0.55m Dp.	1.1x1.1x 0.55m Dp.
FMVTU8 FMVSA8 TCVWI8	8m	1.3x1.3x 0.65m Dp.	1.3x1.3x 0.65m Dp.	1.4x1.4x 0.7m Dp.	1.2x1.2x 0.6m Dp.	1.2x1.2x 0.6m Dp.	1.3x1.3x 0.65m Dp.
FMVTU10 FMVSA10 TCVWI10	10m	1.5x1.5x 0.75m Dp.	1.5x1.5x 0.75m Dp.	1.6x1.6x 0.8m Dp.	1.4x1.4x 0.7m Dp.	1.4x1.4x 0.7m Dp.	1.5x1.5x 0.75m Dp.

A minimum soil bearing pressure of 75 KN/m² is assumed

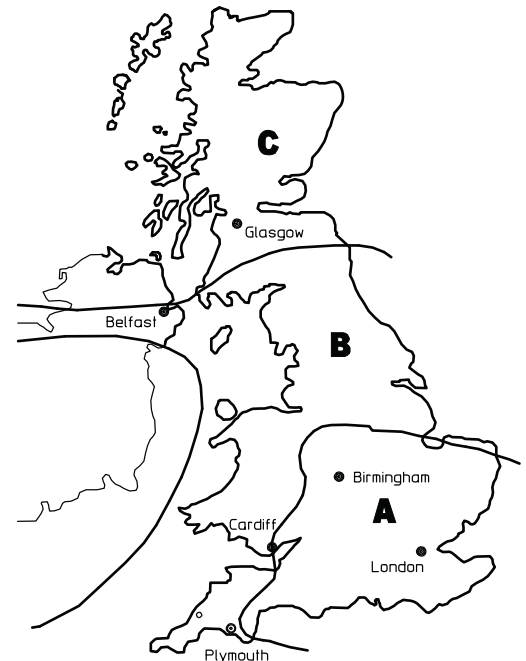

Installation Method

1. From the map, select location of installation
2. Excavate as per recommended area and depth
3. Assemble root base as shown in fig. 1
4. Insert root base into the hole ensuring that it is level and that the four studs protrude 60-70mm above the concrete foundation
5. Fit the cable duct if routing via the interior of the column. A plastic pipe of approximately 100mm outside diameter is recommended for this. Ensure this protrudes through the template by 50mm minimum.
6. Pour concrete ensuring that it is a mix of C35 to table 6 BS 8110 and then tamp down well
7. Fit the setting template over the four protruding studs, double-checking that they are level and that clear access can be gained to the cable duct if it is being used
8. Leave the concrete to cure for a minimum of 72 hours prior to attempting to erect the column
9. When fitting the column, ensure that the concrete base is in complete contact with the underside of the column and grout accordingly.
10. When the column has been fitted, protect the studs with a suitable protective coating. Denzo tape or similar is recommended for this

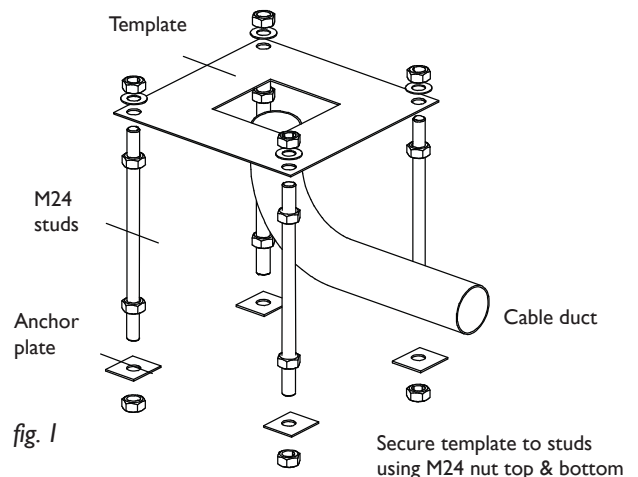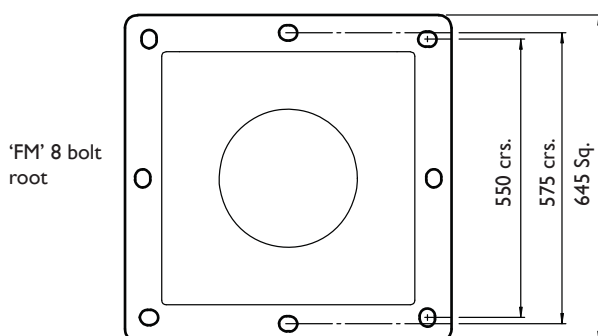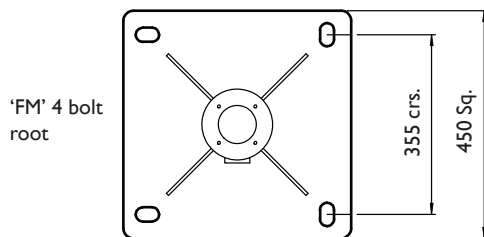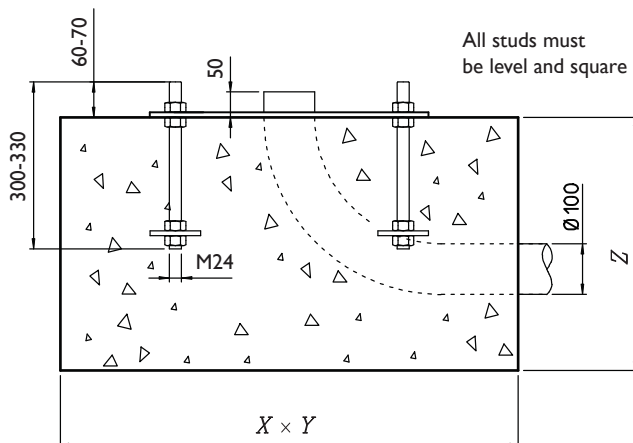

FM Root Assembly


Technical Specification

Model Ref.	'M' Height	Duty rating	Baseplate size 'BxB'	Tube dia. 'D1'	Tube dia. 'D2'	Maximum equip cap'ty	Cable access hole Ø'C'	Door aperture 'H' x 'W'	Weight Kgs.
LPS3	3 metres	Standard	450x450	Ø273	Ø168	25Kg.	Ø250	460 x 118	140Kgs.
LPS4	4 metres	Standard	450x450	Ø273	Ø168	25Kg.	Ø250	460 x 118	160Kgs.
LPS5	5 metres	Standard	450x450	Ø273	Ø168	25Kg.	Ø250	460 x 118	185Kgs.
LPS6	6 metres	Standard	450x450	Ø273	Ø168	25Kg.	Ø250	460 x 118	210Kgs.
LPS6HD		Heavy duty	450x450	Ø323	Ø219	25Kg.	Ø250	460 x 118	230Kgs.
LPS8	8 metres	Standard	450x450	Ø273	Ø168	25Kg.	Ø250	460 x 118	245Kgs.
LPS8HD		Heavy duty	450x450	Ø323	Ø219	25Kg.	Ø250	460 x 118	330Kgs.
LPS10	10 metres	Standard	450x450	Ø273	Ø168	25Kg.	Ø250	460 x 118	285Kgs.
LPS10HD		Heavy duty	450x450	Ø323	Ø219	25Kg.	Ø250	460 x 118	375Kgs.

All dimensions in mm unless otherwise stated

Standards Applicable

- Structural Steelwork:
BS EN 10210-1:1994
BS EN 10210-2:1997
- General Steelwork:
BSI 449:1991, BSI 387:1985
BS EN 10025:1993
- Hot Dipped Galvanized:
BS EN ISO 1461:2009
- Welding Procedures:
Comply with BS EN 1011-2:2001
- Fasteners: Grade 8.8 BS3692:2001
BS4190:2001, DIN931, DIN934
- Design Wind Loading:
In accordance with CP3
chapter V Pt 2 &
BS 6399 Pt 2:1997
- Paint Finishes:
BS4800 and RAL colour range

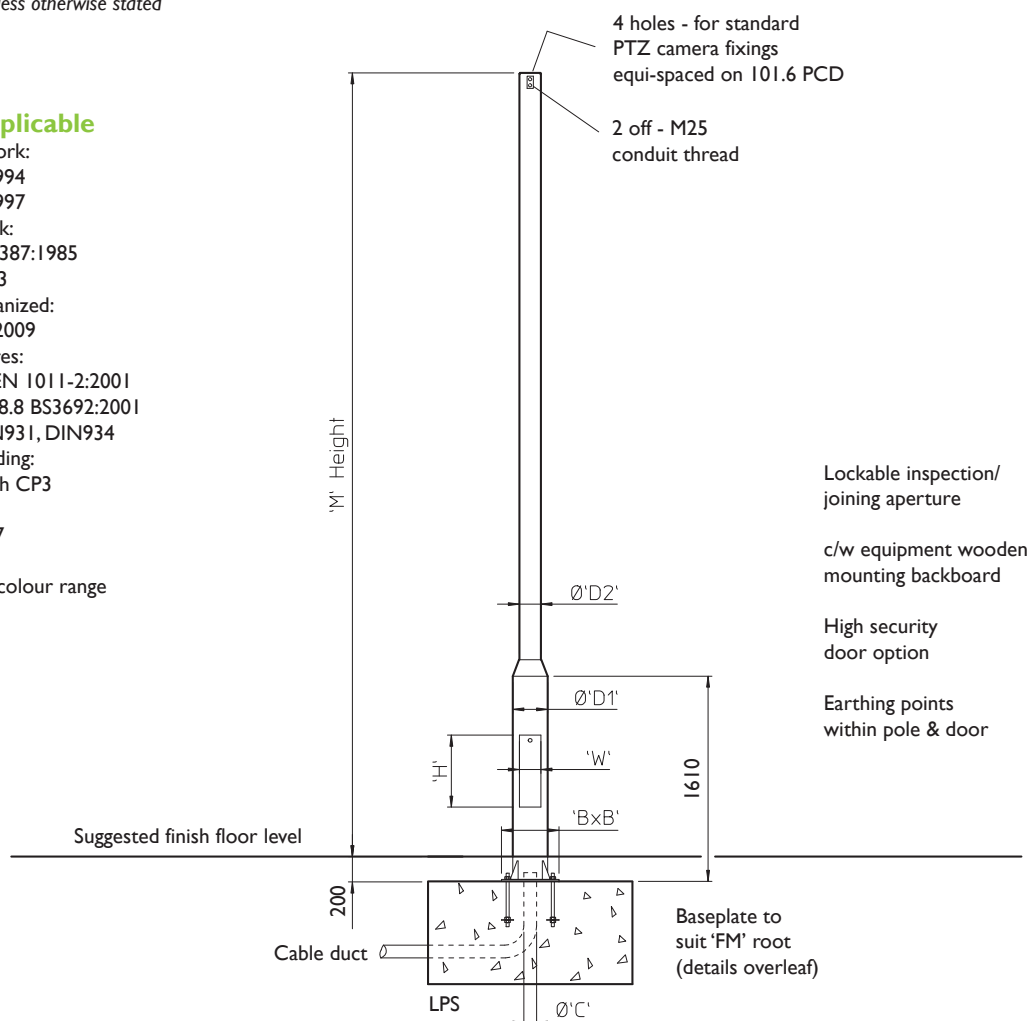


Accessories & Adaptors

- | | |
|------------|------------------------------------|
| LPS/ACB | Anti-Climb Bracket |
| LPS/Paint | Paint to BS4800 & RAL Colours |
| LPS/SDA | Swept Dome Adaptor |
| LPS/SDA2 | Swept Dome Adaptor Dual |
| LPS/PTI-S2 | 1 Pan & Tilt c/w 2 Static Adaptors |
| LPS/TPTA | Twin Pan & Tilt Adaptor |
| LPS/3SA | Triple Static Adaptor |
| LPS/2SA | Twin Static Adaptor |
| LPS/ISA | Pan & Tilt - Single Fixed |

- | | |
|---------------|----------------------------|
| LPS/CSI50-300 | Column Spacers 150mm-300mm |
| LPS/TBC | Telemetry Clamp Bracket |
| LPS/HSD-F | High Security Door Option |
| LPS/DB | Decorative Banding |


Product Ref & Ordering Information

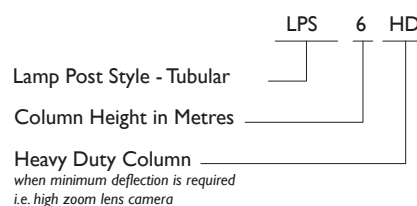

Base and Windload Specification

Concrete Foundation Table X x Y x Z							
Model Ref	Height	Area of Country			Area of Town		
		A	B	C	A	B	C
LPS3	3m	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.
LPS4	4m	0.9x0.9x 0.45m Dp.	0.9x0.9x 0.45m Dp.	0.9x0.9x 0.45m Dp.	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.	0.9x0.9x 0.45m Dp.
LPS5	5m	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	0.9x0.9x 0.45m Dp.	0.9x0.9x 0.45m Dp.	1.0x1.0x 0.5m Dp.
LPS6	6m	1.1x1.1x 0.55m Dp.	1.1x1.1x 0.55m Dp.	1.2x1.2x 0.6m Dp.	1.0x1.0x 0.5m Dp.	1.1x1.1x 0.55m Dp.	1.1x1.1x 0.55m Dp.
LPS8	8m	1.3x1.3x 0.65m Dp.	1.3x1.3x 0.65m Dp.	1.4x1.4x 0.7m Dp.	1.2x1.2x 0.6m Dp.	1.2x1.2x 0.6m Dp.	1.3x1.3x 0.65m Dp.
LPS10	10m	1.5x1.5x 0.75m Dp.	1.5x1.5x 0.75m Dp.	1.6x1.6x 0.8m Dp.	1.4x1.4x 0.7m Dp.	1.4x1.4x 0.7m Dp.	1.5x1.5x 0.75m Dp.

A minimum soil bearing pressure of 75 KN/m² is assumed

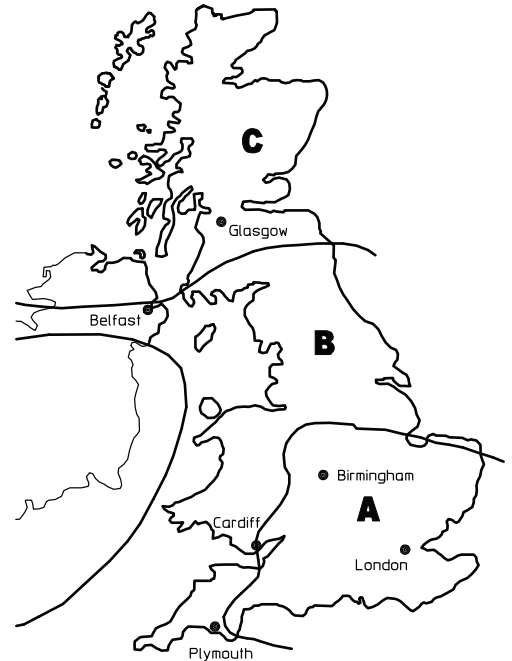

Installation Method

1. From the map, select location of installation
2. Excavate as per recommended area and depth
3. Assemble root base as shown in fig. 1
4. Insert root base into the hole ensuring that it is level and that the four studs protrude 60-70mm above the concrete foundation
5. Fit the cable duct if routing via the interior of the column. A plastic pipe of approximately 100mm outside diameter is recommended for this. Ensure this protrudes through the template by 50mm minimum.
6. Pour concrete ensuring that it is a mix of C35 to table 6 BS 8110 and then tamp down well
7. Fit the setting template over the four protruding studs, double-checking that they are level and that clear access can be gained to the cable duct if it is being used
8. Leave the concrete to cure for a minimum of 72 hours prior to attempting to erect the column
9. When fitting the column, ensure that the concrete base is in complete contact with the underside of the column and grout accordingly.
10. When the column has been fitted, protect the studs with a suitable protective coating. Denzo tape or similar is recommended for this

Foundation sizes are determined for three sets of wind speeds, which will cover most of the British Isles.

Area A = 44m/s (98mph)
Area B = 48m/s (107mph)
Area C = 52m/s (116mph)

Maximum gust speed is likely to be exceeded on average once every 50 years at 10m above the ground in open level country.


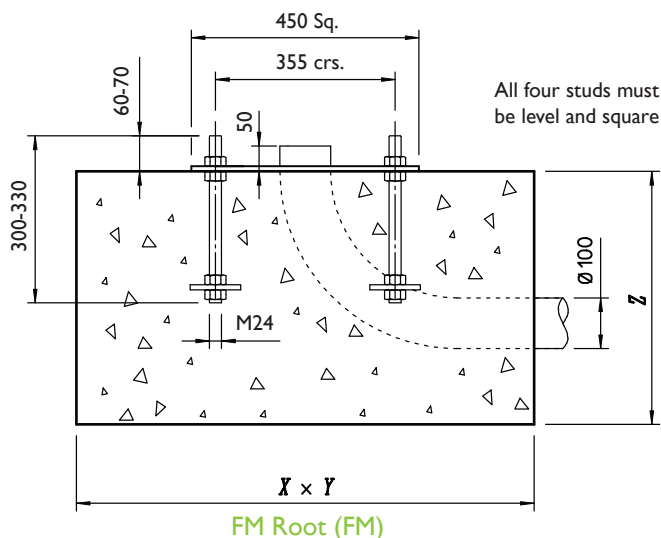


fig. 1

FM Root Assembly

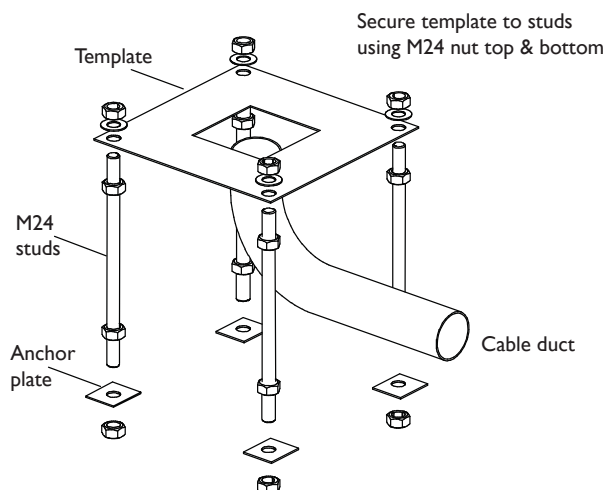

Fixed & Tilt-Over Cabinet Base TC, CB, TCTO, CBTO Range

TC & CB Range

The TC and CB range of CCTV columns remain the specifiers number one choice for cabinet based columns, for use within city centre and urban schemes. The 400 square cabinet remains the mainstay of this range of columns, with cabinet options of 325 and 500 square readily available for terminating all communication and electrical needs. The proven design, along with many versatile features, keep it at the forefront of CCTV street furniture and it is still the industry standard.

TCTO & CBTO Range

The TC and CB range naturally evolved into the TCTO and CBTO range of tilt-over columns, for use within city centre and urban schemes. The added bonus of maintenance at ground level make this a popular and safe first choice where access for maintenance is of concern. The 400 square cabinet remains the mainstay of this range, with the 325 cabinet option readily available. The sturdy, proven design, along with many versatile features, keep it at the forefront of CCTV urban furniture with the added bonus of tiltability.

Sales Direct: +44 (0) 1254 700200

Fax: +44 (0) 1254 873637 Website: www.wec.uk.net Email: all@wec.uk.net

TC & CB Range

Design Features

- The ideal column for urban CCTV schemes.
- Proven design accepted by the Highways Agency.
- Integral lockable cabinet base for housing telemetry, fibre optics, spurs etc.
- Excellent stability characteristics ensures minimal camera movement.
- Recommended for installation in high profile places.
- Suitable for all public access areas.
- Desirable columns where aesthetics are of importance.
- Totally concealed cable management facility.
- High security and 'vault' door options for high risk areas.
- Decorative and ornamental versions available.
- Options include double doors and split cabinets.
- Telecom cell scheme versions available.
- Hot dipped galvanised finish for maximum weather protection and low maintenance requirements.
- Custom and bespoke versions tailored to the customer's requirements.

General Specifications

- Standard pan and tilt fixing of 101.6 PCD.
- Built in cable entry and exit points.
- Compatible with WEC adaptors, accessories and anti-climbs.
- Flange-mounted 'TC' type root.
- 'Pocket' type roots available for restricted foundation locations.
- Equipment loading up to 25kg.
- Variety of standard heights from 3 to 15 metres.

Product Codes

400/500 TC Range:

- TC3
- TC4
- TC5
- TC6
- TC7
- TC8
- TC10
- TC12
- TC15

325 CB Range:

- CB4
- CB5
- CB6
- CB8



TCTO & CBTO Range

Design Features

- The versatile column for urban CCTV schemes.
- Proven design accepted by the Highways Agency.
- The tilt-over column enables safe camera maintenance at ground level.
- Integral lockable cabinet base for housing telemetry, fibre optics, spurs etc.
- Excellent stability characteristics ensures minimal camera movement.
- Recommended for installation in high profile places.
- Suitable for all public access areas.
- Desirable columns where aesthetics are of importance.
- Totally concealed cable management facility.
- High security and 'vault' door options for high risk areas.
- A transferable winch which allows multi-site servicing and leaves installation tamper proof.
- Hot dipped galvanised finish for maximum weather protection and low maintenance requirements.
- Custom and bespoke versions tailored to the customer's requirements.

General Specifications

- Standard pan and tilt fixing of 101.6 PCD.
- Built in cable entry and exit points.
- Compatible with WEC adaptors, accessories and anti-climbs.
- Flange-mounted 'TC' type root.
- 'Pocket' type roots available for restricted foundation locations.
- Equipment loading up to 25kg.
- Variety of standard heights from 4 to 10 metres.

Product Codes

400 TCTO Range:

- TC4TO
- TC5TO
- TC6TO
- TC7TO
- TC8TO
- TC10TO

325 CBTO Range:

- CB4TO
- CB5TO
- CB6TO
- CB8TO




Technical Specification

Model Ref.	'M' Height	Tilting rear clearance 'R'	Baseplate size 'BxB'	Tube diam. 'D'	Cable access hole 'C'	Maximum equip cap'ty	Weight Kgs	Winch Selection
TC3	3 metres	n/a	550x550	Ø168	325x325	25Kg.	181.3 Kgs.	n/a
TC4	4 metres	n/a	550x550	Ø168	325x325	25Kg.	208.4 Kgs.	n/a
TCTO4		1220	550x550	Ø168	325x325	25Kg.	226.4 Kgs.	WUA
TC5	5 metres	n/a	550x550	Ø168	325x325	25Kg.	228.5 Kgs.	n/a
TCTO5		1220	550x550	Ø168	325x325	25Kg.	246.5 Kgs.	WUA
TC6	6 metres	n/a	550x550	Ø168	325x325	25Kg.	248.6 Kgs.	n/a
TCTO6		1220	550x550	Ø168	325x325	25Kg.	266.6 Kgs.	WUA
TC8	8 metres	n/a	550x550	Ø168	325x325	25Kg.	288.8 Kgs.	n/a
TC8HD		n/a	550x550	Ø219	325x325	25Kg.	331.8 Kgs.	n/a
TCTO8		1220	550x550	Ø168	325x325	25Kg.	349.8 Kgs.	WUA
TC10	10 metres	n/a	645x645	Ø219	325x325	25Kg.	384.6 Kgs.	n/a
TC10HD		n/a	645x645	Ø273	325x325	25Kg.	516.1 Kgs.	n/a
TC12	12 metres	n/a	645x645	Ø273	325x325	25Kg.	598.9 Kgs.	n/a

All dimensions in mm unless otherwise stated

Standards Applicable

- Structural Steelwork:
BS EN 10210-1:1994, BS EN 10210-2:1997
- General Steelwork:
BS1449:1991, BS1387:1985, BS EN 10025:1993
- Hot Dipped Galvanized:
BS EN ISO 1461:2009
- Fasteners: Grade 8.8 BS3692:2001
BS4190:2001, DIN931, DIN934
- Welding Procedures: Comply with
BS EN 1011-2:2001
- Design Wind Loading: In accordance with CP3
chapter V Pt 2 & BS 6399 Pt 2:1997
- Paint Finishes: BS4800 and RAL colour range

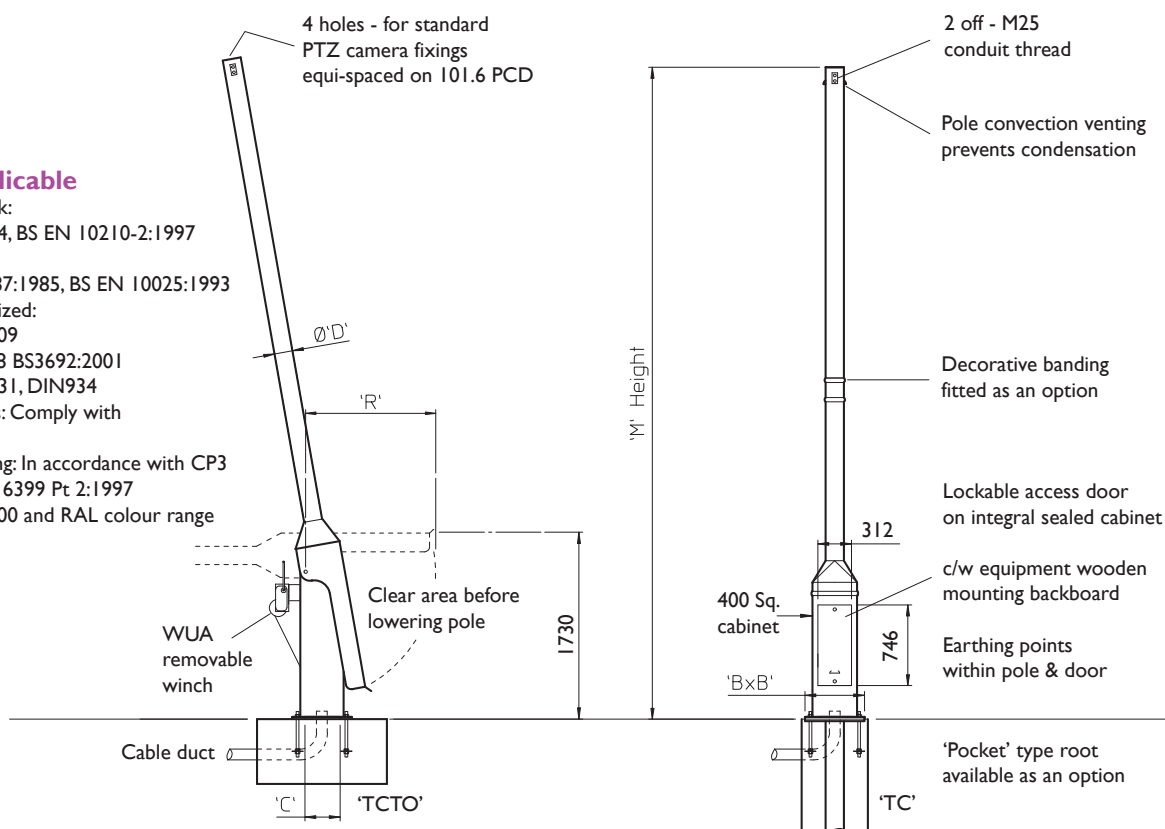

Options & Accessories

- Enlarged cabinet (500 Sq.)
- All pan/tilt, dome, fixed camera mount bracketry
- Transferable winch for tilt-over columns
- Double door access (partitioned cabinet)
- Camera wash equipment (static columns only)
- Ornate camera mounting brackets





Product Ref & Ordering Information

	TC	TO	6	HD
Town Centre 400 Sq. Cabinet Based Column				
Tilt-Over Column				
Column Height in Metres				
Heavy Duty Column when minimum deflection is required i.e. high zoom lens camera				

Base and Windload Specification


Concrete Foundation Table X x Y x Z							
Model Ref	Height	Area of Country			Area of Town		
		A	B	C	A	B	C
TC3	3m	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.	0.9x0.9x 0.45m Dp.	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.
TC4 TCTO4	4m	0.9x0.9x 0.45m Dp.	0.9x0.9x 0.45m Dp.	0.9x0.9x 0.45m Dp.	0.8x0.8x 0.4m Dp.	0.9x0.9x 0.45m Dp.	0.9x0.9x 0.45m Dp.
TC5 TCTO5	5m	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	0.9x0.9x 0.45m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.
TC6 TCTO6	6m	1.0x1.0x 0.5m Dp.	1.1x1.1x 0.55m Dp.	1.2x1.2x 0.6m Dp.	1.0x1.0x 0.5m Dp.	1.1x1.1x 0.55m Dp.	1.1x1.1x 0.55m Dp.
TC8 TCTO8	8m	1.2x1.2x 0.6m Dp.	1.3x1.3x 0.65m Dp.	1.3x1.3x 0.65m Dp.	1.1x1.1x 0.55m Dp.	1.2x1.2x 0.6m Dp.	1.3x1.3x 0.65m Dp.
TC10	10m	1.4x1.4x 0.7m Dp.	1.5x1.5x 0.75m Dp.	1.6x1.6x 0.8m Dp.	1.3x1.3x 0.65m Dp.	1.4x1.4x 0.7m Dp.	1.5x1.5x 0.75m Dp.
TC12	12m	1.7x1.7x 0.85m Dp.	1.8x1.8x 0.9m Dp.	1.9x1.9x 0.85m Dp.	1.6x1.6x 0.8m Dp.	1.7x1.7x 0.85m Dp.	1.8x1.8x 0.9m Dp.

A minimum soil bearing pressure of 75 KN/m² is assumed

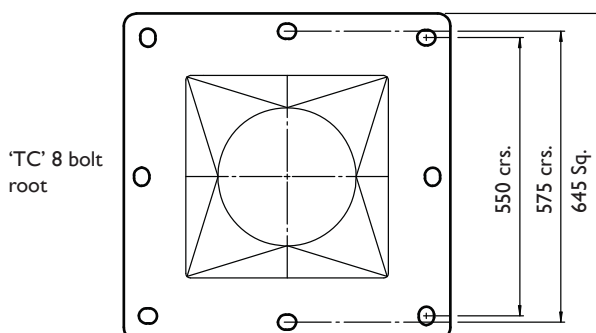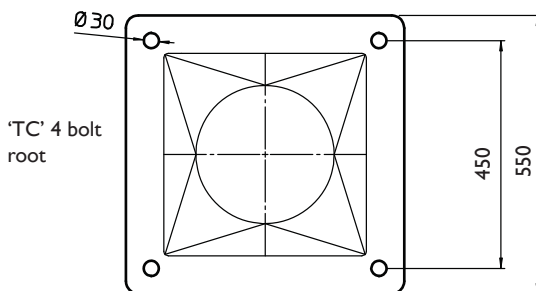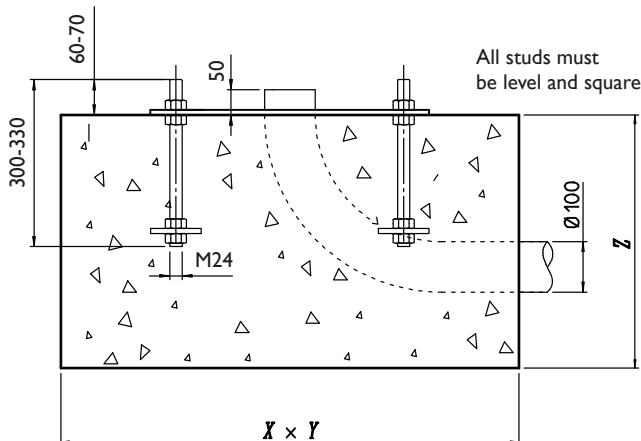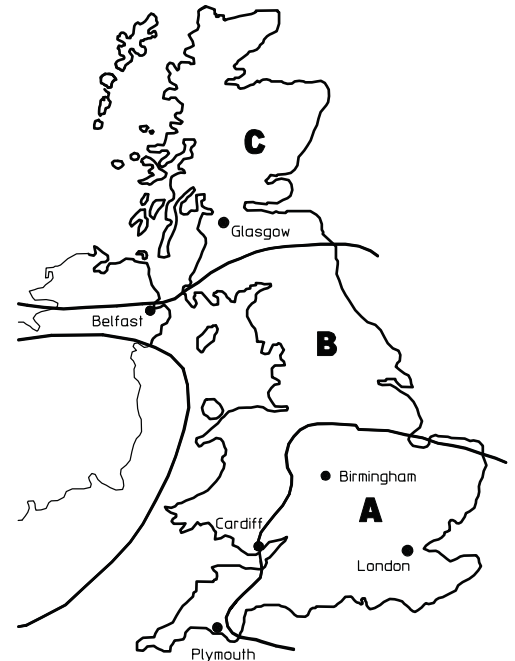

Installation Method

1. From the map, select location of installation
2. Excavate as per recommended area and depth
3. Assemble root base as shown in fig. 1
4. Insert root base into the hole ensuring that it is level and that the four studs protrude 60-70mm above the concrete foundation
5. Fit the cable duct if routing via the interior of the column. A plastic pipe of approximately 100mm outside diameter is recommended for this. Ensure this protrudes through the template by 50mm minimum.
6. Pour concrete ensuring that it is a mix of C35 to table 6 BS 8110 and then tamp down well
7. Fit the setting template over the four protruding studs, double-checking that they are level and that clear access can be gained to the cable duct if it is being used
8. Leave the concrete to cure for a minimum of 72 hours prior to attempting to erect the column
9. When fitting the column, ensure that the concrete base is in complete contact with the underside of the column and grout accordingly
10. When the column has been fitted, protect the studs with a suitable protective coating. Denzo tape or similar is recommended for this

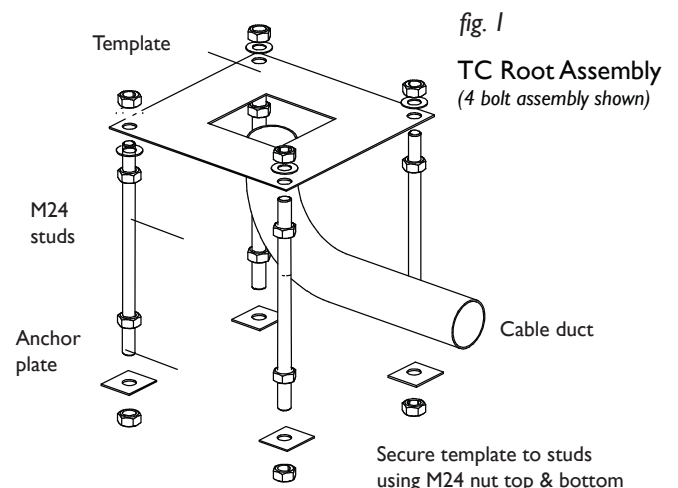


Technical Specification

Model Ref.	'M' Height	Tilting rear clearance 'R'	Maximum equipment capacity	Shaft diameter 'D'	Weight Kgs	Winch Selection
CB4	4 metres	n/a	25Kg.	Ø139	175Kgs.	n/a
CBTO4		1220	25Kg.	Ø139	222Kgs.	WUA
CB5	5 metres	n/a	25Kg.	Ø139	195Kgs.	n/a
CBTO5		1220	25Kg.	Ø139	242Kgs.	WUA
CB6	6 metres	n/a	25Kg.	Ø139	215Kgs.	n/a
CBTO6		1220	25Kg.	Ø139	262Kgs.	WUA
CB8	8 metres	n/a	25Kg.	Ø139	255Kgs.	n/a
CBTO8		1220	25Kg.	Ø139	302Kgs.	WUA

All dimensions in mm unless otherwise stated

Standards Applicable

- Structural Steelwork:
BS EN 10210-1:1994, BS EN 10210-2:1997
- General Steelwork:
BS1449:1991, BS1387:1985, BS EN 10025:1993
- Hot Dipped Galvanized:
BS EN ISO 1461:2009
- Welding Procedures: Comply with BS EN 1011-2:2001
- Fasteners: Grade 8.8 BS3692:2001
BS4190:2001, DIN931, DIN934
- Design Wind Loading: In accordance with CP3 chapter V Pt 2 & BS 6399 Pt 2:1997
- Paint Finishes: BS4800 and RAL colour range

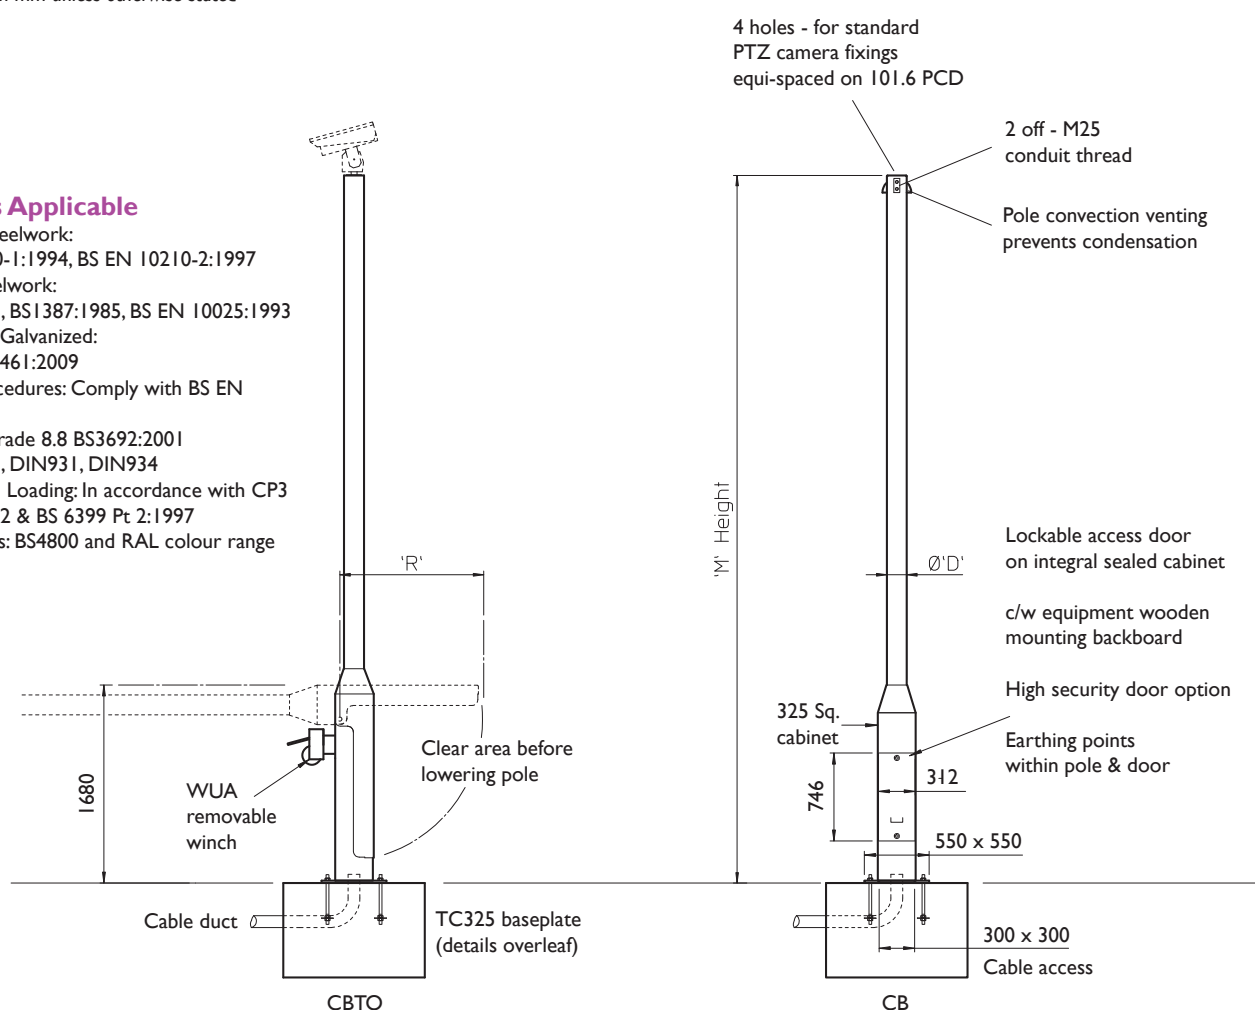


Accessories & Adaptors

- | | |
|---------------|------------------------------------|
| CB(TO)/ACB | Anti-Climb Bracket |
| CB(TO)/Paint | Paint to BS4800 & RAL Colours |
| CB(TO)/SDA | Swept Dome Adaptor |
| CB(TO)/SDA2 | Swept Dome Adaptor Dual |
| CB(TO)/PTI-S2 | 1 Pan & Tilt c/w 2 Static Adaptors |
| CB(TO)/TPTA | Twin Pan & Tilt Adaptors |
| CB(TO)/2SA | Twin Static Adaptor |
| CB(TO)/ISA | Pan & Tilt - Single Fixed |

- | | |
|------------------|----------------------------|
| CB(TO)/CS150-300 | Column Spacers 150mm-300mm |
| CB(TO)/TBC | Telemetry Clamp Bracket |
| CB(TO)/HSD-F | High Security Door Option |
| CB(TO)/LS | Ladder Support |


Product Ref & Ordering Information

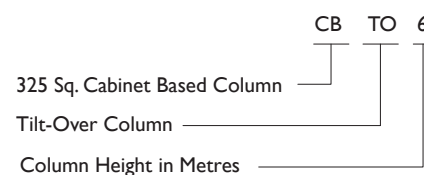

Base and Windload Specification

Concrete Foundation Table X x Y x Z							
Model Ref	Height	Area of Country			Area of Town		
		A	B	C	A	B	C
CB3	3m	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.	9x0.9x 0.45m Dp.	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.
CB4 CBTO4	4m	0.9x0.9x 0.45m Dp.	0.9x0.9x 0.45m Dp.	0.9x0.9x 0.45m Dp.	0.8x0.8x 0.4m Dp.	0.8x0.8x 0.4m Dp.	0.9x0.9x 0.45m Dp.
CB5 CBTO5	5m	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	0.9x0.9x 0.45m Dp.	0.9x0.9x 0.45m Dp.	1.0x1.0x 0.5m Dp.
CB6 CBTO6	6m	1.1x1.1x 0.55m Dp.	1.1x1.1x 0.55m Dp.	1.2x1.2x 0.6m Dp.	1.0x1.0x 0.5m Dp.	1.0x1.0x 0.5m Dp.	1.1x1.1x 0.55m Dp.
CB8 CBTO8	8m	1.2x1.2x 0.6m Dp.	1.3x1.3x 0.65m Dp.	1.4x1.4x 0.7m Dp.	1.1x1.1x 0.55m Dp.	1.2x1.2x 0.6m Dp.	1.2x1.2x 0.6m Dp.

A minimum soil bearing pressure of 75 KN/m² is assumed

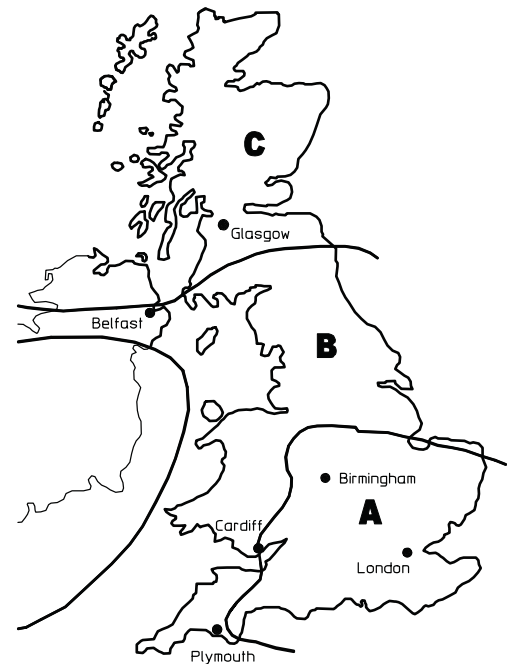


Installation Method

1. From the map, select location of installation
2. Excavate as per recommended area and depth
3. Assemble root base as shown in fig. 1
4. Insert root base into the hole ensuring that it is level and that the four studs protrude 60-70mm above the concrete foundation
5. Fit the cable duct if routing via the interior of the column. A plastic pipe of approximately 100mm outside diameter is recommended for this. Ensure this protrudes through the template by 50mm minimum.
6. Pour concrete ensuring that it is a mix of C35 to table 6 BS 8110 and then tamp down well
7. Fit the setting template over the four protruding studs, double-checking that they are level and that clear access can be gained to the cable duct if it is being used
8. Leave the concrete to cure for a minimum of 72 hours prior to attempting to erect the column
9. When fitting the column, ensure that the concrete base is in complete contact with the underside of the column and grout accordingly. Torque the nuts to 230-270 Nm (175-200 fl. lb.)
10. When the column has been fitted, protect the studs with a suitable protective coating. Denzo tape or similar is recommended for this

Foundation sizes are determined for three sets of wind speeds, which will cover most of the British Isles.

Area A = 44m/s (98mph)
Area B = 48m/s (107mph)
Area C = 52m/s (116mph)


Maximum gust speed is likely to be exceeded on average once every 50 years at 10m above the ground in open level country.

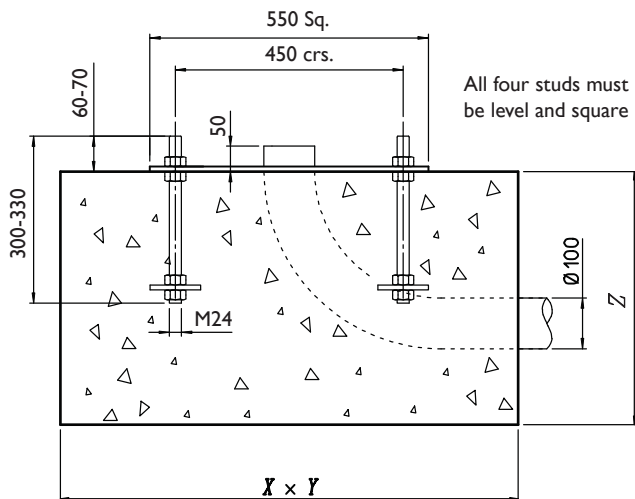





TC325 Root

fig. 1

TC325 Root Assembly

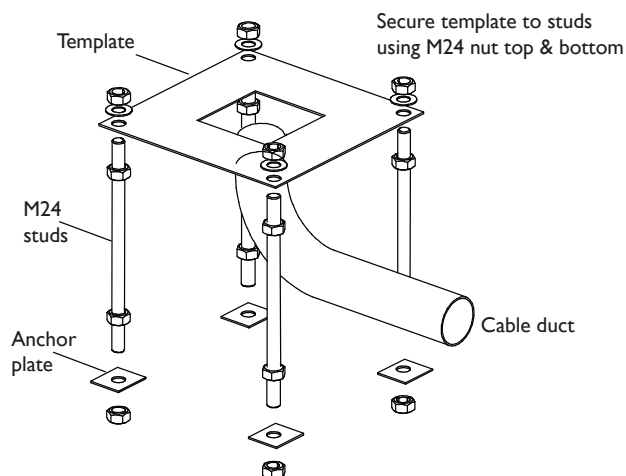


Fixed & Tilt-Over Cabinet Base TC, CB, TCTO, CBTO Accessories

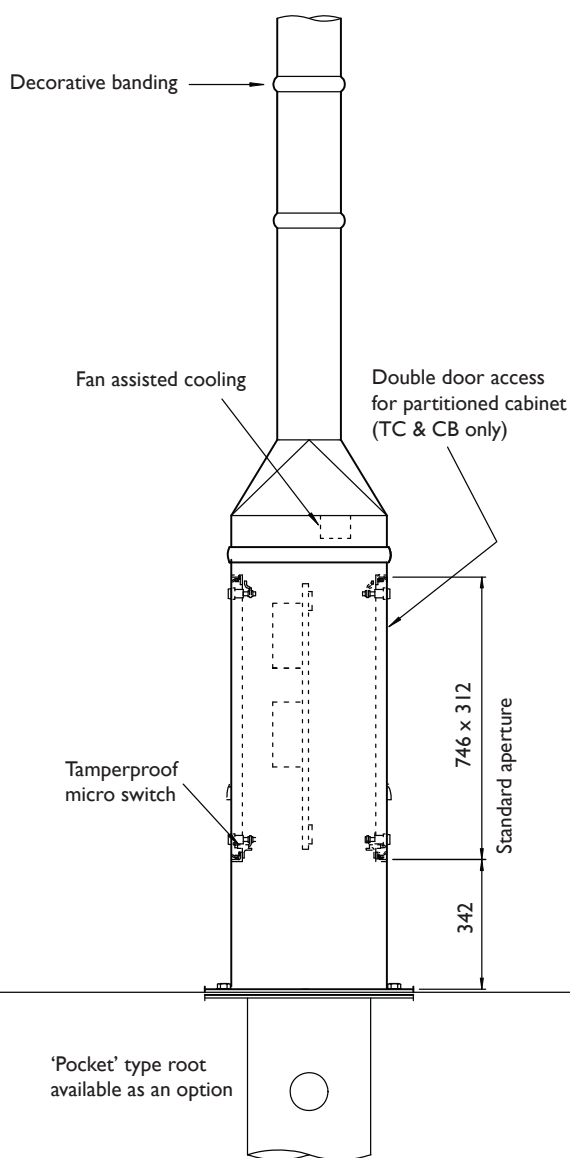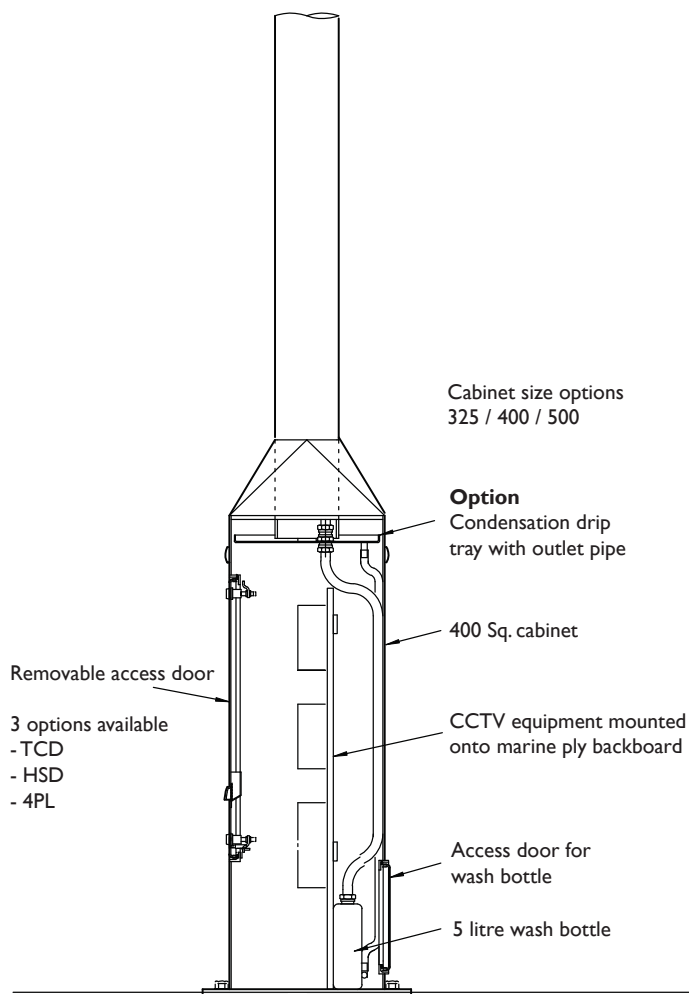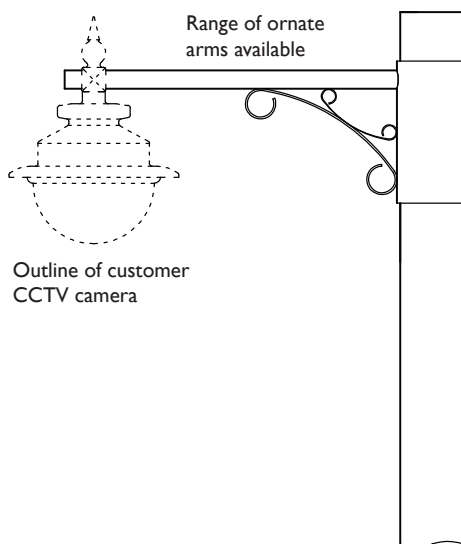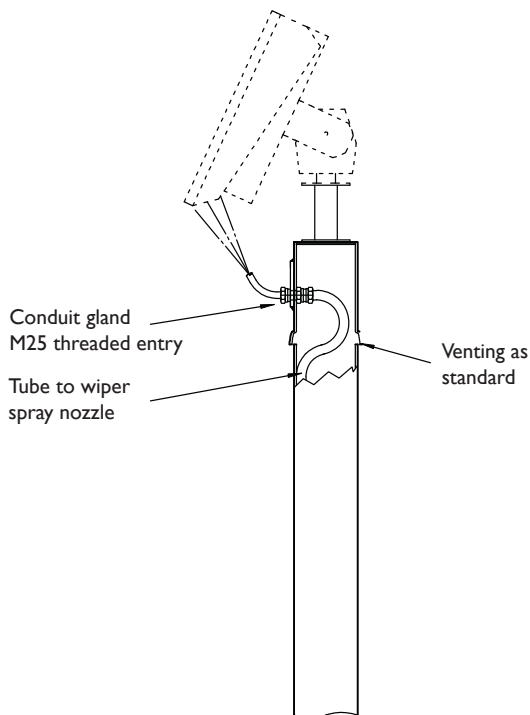

Optional Extras

Door Options


Moderate risk area
2 point locking

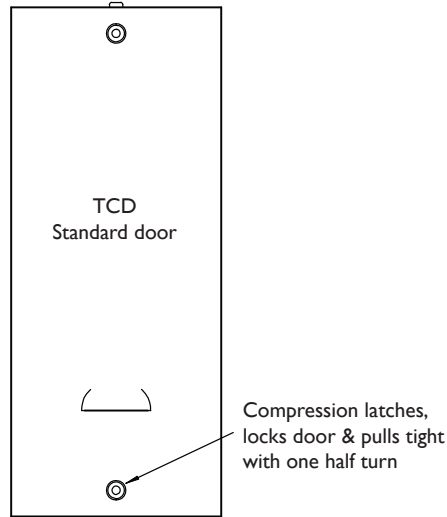

One key required

- Louvered door
- Close fitting and flush door
- Self grip rubber door seal
- Secure compression locks
- Earthing lugs


High risk area
3 point locking

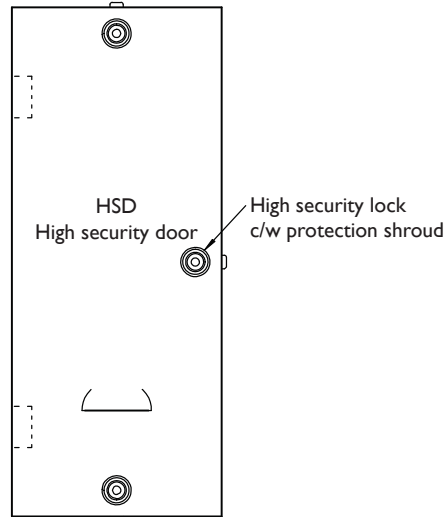

Two keys required

- Louvered door
- Close fitting and flush door
- Self grip rubber door seal
- 2 secure compression locks and 1 high security lock
- Earthing lugs
- Protection shrouds for each lock

Very high risk area
4 point locking

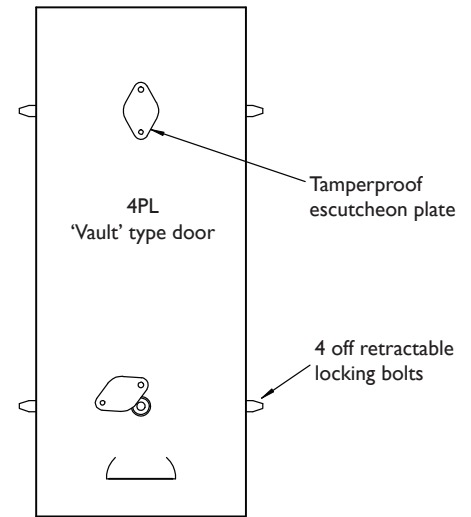

Three keys required

- Louvered door
- Close fitting and flush door
- 2 high security locks
- Earthing lugs
- Tamperproof escutcheons for each lock
- Stainless steel locking mechanism



Vandal Resistant & Anti-Ram Columns AD and AV Range

AD Range**AV Range**

The well established TC range of CCTV columns have evolved into extremely high security and vandal deterrent items. These columns are being used with success in out of town areas that demand a tamper proof and vandal resistant product. The 400 square cabinet remains the mainstay of this range, however the anti-vandal range has a double skinned cabinet fitted with an outer 'hidden lock' door and an inner 'vault' door. The column shaft features a loose cover sleeve that will turn should the shaft be attacked with mechanical cutting equipment. The vandal deterrent column is based on the standard 400 square cabinet and features a 'vault' door, however the cabinet and shaft are constructed from a single skin of high grade, heavy duty steel. Both the AV and AD ranges can be supplied with the anti-ram raid base structure or anti-ram bollards to protect the column. When using these types of column, it is advisable to protect the exposed camera from vandalism with camera protection cages and anti-ladder brackets.

Sales Direct: +44 (0) 1254 700200

Fax: +44 (0) 1254 873637 Website: www.wec.uk.net Email: all@wec.uk.net

AD Range

Design Features

- An ideal column for urban extreme risk CCTV schemes.
- Integral lockable cabinet base for housing telemetry, fibre optics, spurs etc.
- Heavy duty high grade steel, single skinned cabinet.
- Excellent stability characteristics ensures minimal camera movement.
- Recommended for installation in high risk and problem areas.
- Camera mounting shaft made from heavy duty high grade steel.
- Suitable for all public access areas.
- Totally concealed cable management facility.
- 'Vault' door as standard.
- Options include double doors and split cabinets.
- Telecom cell scheme versions available.
- Anti-ram base structure and bollards available.
- Hot dipped galvanised finish for maximum weather protection and low maintenance requirements.
- Custom and bespoke versions tailored to the customer's requirements.

General Specifications

- Standard pan and tilt fixing of 101.6 PCD.
- Built in cable entry and exit points.
- Compatible with WEC adaptors, accessories and anti-climbs.
- Flange-mounted 'TC' type root - 8 stud type.
- 'Pocket' type roots available for restricted foundation locations.
- Equipment loading up to 25kg.
- Variety of standard heights from 3 to 15 metres.

Product Codes

Anti-Vandal Range:

- AD6
- AD8
- AD10
- AD12
- AD15

Options:

- ARB1: anti-ram bollard
- ALR: anti ladder rest

AV Range

Design Features

- An ideal column for urban extreme risk CCTV schemes.
- Integral lockable cabinet base for housing telemetry, fibre optics, spurs etc.
- Excellent stability characteristics ensures minimal camera movement.
- Recommended for installation in high risk and problem areas.
- Double doors and double skinned cabinet for ultimate protection.
- Double skinned column shaft with spinner tube.
- Suitable for all public access areas.
- Totally concealed cable management facility.
- Hidden lock and 'vault' door as standard.
- Options include double doors and split cabinets.
- Telecom cell scheme versions available.
- Anti-ram base structure and bollards available.
- Hot dipped galvanised finish for maximum weather protection and low maintenance requirements.
- Custom and bespoke versions tailored to the customer's requirements.

General Specifications

- Standard pan and tilt fixing of 101.6 PCD.
- Built in cable entry and exit points.
- Compatible with WEC adaptors, accessories and anti-climbs.
- Flange-mounted 'TC' type root - 8 stud type.
- 'Pocket' type roots available for restricted foundation locations.
- Equipment loading up to 25kg.
- Variety of standard heights from 3 to 15 metres.

Product Codes

Anti-Randal Range:

- AV6
- AV8
- AV10
- AV12
- AV15


Options:

- ARB1: anti-ram bollard
- ALR: anti ladder rest


Technical Specification

Model Ref	Height 'M'	Shaft size 'D'	Shaft size 'A'	Maximum equip cap'ty	Cable access hole Ø'C'
AV6 AD6	6m	Ø168	n/a Ø219	25Kgs.	Ø250
AV8 AD8	8m	Ø168	n/a Ø219	25Kgs.	Ø250
AV10 AD10	10m	Ø219	n/a Ø273	25Kgs.	Ø250
AV12 AD12	12m	Ø219	n/a Ø273	25Kgs.	Ø250

Details on door locking system are available

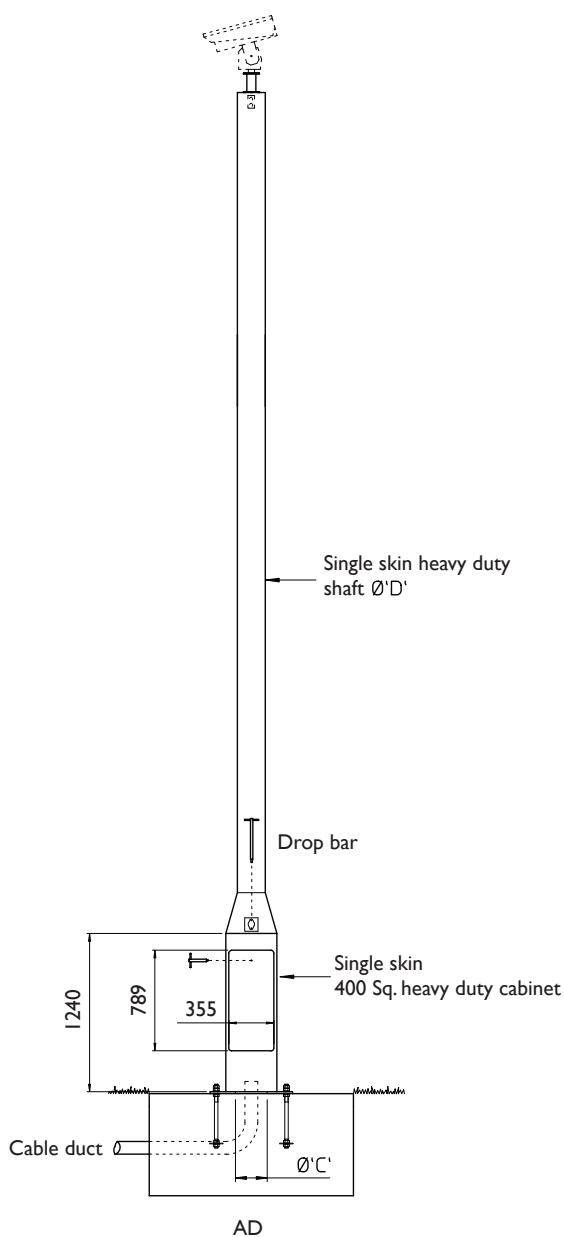

Heavy duty 400 Sq. cabinet
10 thk door & case
8 bolt fixing

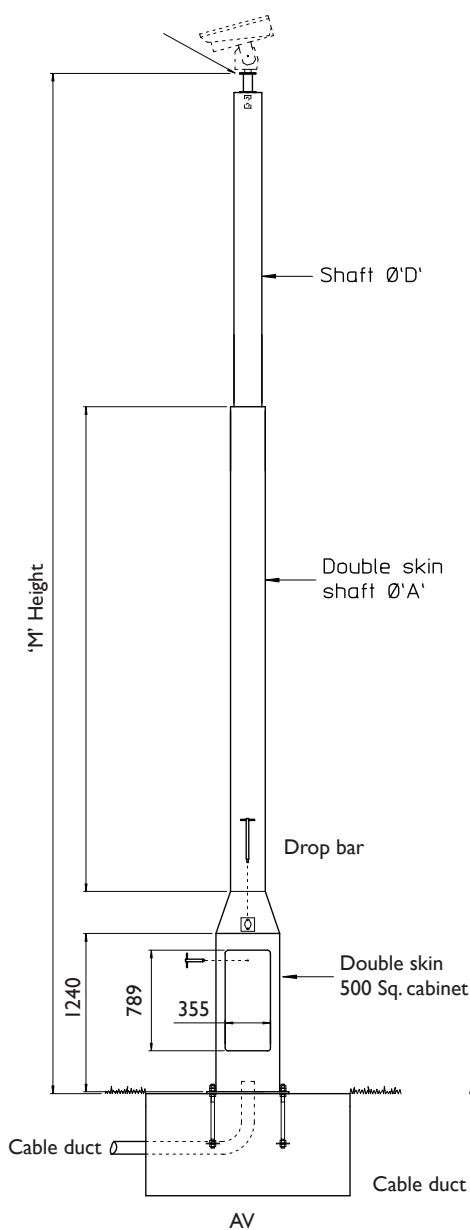


Heavy duty 500 Sq. double skin cabinet
10 thk outer door & case
Inner door 4 point locking
8 bolt fixing

Heavy duty cylindrical camera cages are available to suit the column

Removable top gives access into cage

Climb guards available

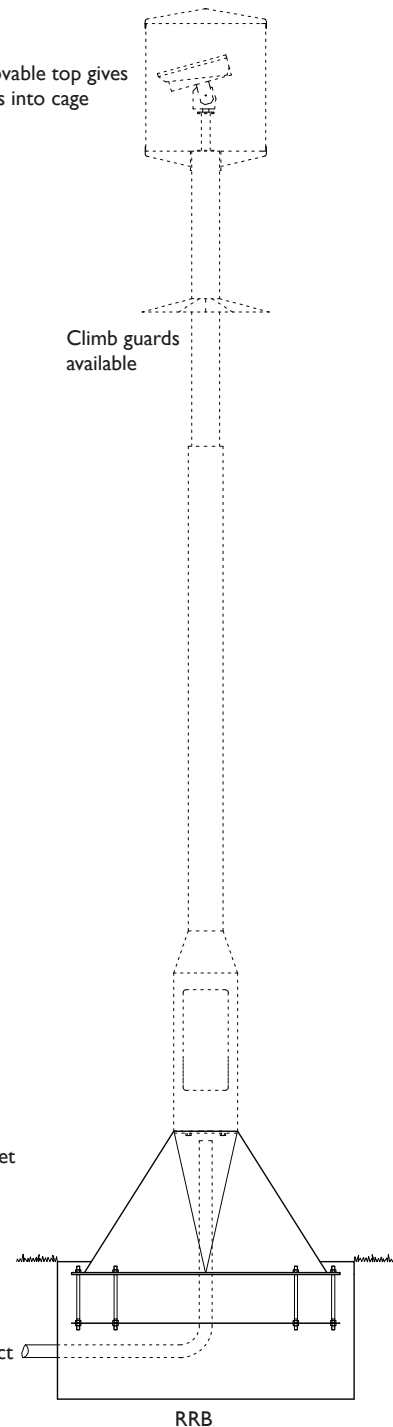

Ram raid base
for use with AV or AVR
8 bolt fixing

Base and Windload Specification

Concrete Foundation Table X x Y x Z							
Model & Base Ref	Ht.	Area of Country			Area of Town		
		A	B	C	A	B	C
AV6 AD6	6m	1.1x1.1x 0.55m Dp.	1.2x1.2x 0.6m Dp.	1.3x1.3x 0.65m Dp.	1.1x1.1x 0.55m Dp.	1.1x1.1x 0.55m Dp.	1.2x1.2x 0.6m Dp.
AV8 AD8	8m	1.3x1.3x 0.65m Dp.	1.4x1.4x 0.7m Dp.	1.4x1.4x 0.7m Dp.	1.2x1.2x 0.6m Dp.	1.3x1.3x 0.65m Dp.	1.3x1.3x 0.65m Dp.
AV10 AD10	10m	1.5x1.5x 0.75m Dp.	1.6x1.6x 0.8m Dp.	1.7x1.7x 0.85m Dp.	1.4x1.4x 0.7m Dp.	1.5x1.5x 0.75m Dp.	1.5x1.5x 0.75m Dp.
AV12 AD12	12m	1.7x1.7x 0.85m Dp.	1.8x1.8x 0.9m Dp.	1.8x1.8x 0.9m Dp.	1.5x1.5x 0.75m Dp.	1.6x1.6x 0.8m Dp.	1.7x1.7x 0.85m Dp.

A minimum soil bearing pressure of 75 KN/m² is assumed


Installation Method

1. From the map, select location of installation
2. Excavate as per recommended area and depth
3. Assemble root base as shown in fig. 1
4. Insert root base into the hole ensuring that it is level and that the four studs protrude 60-70mm above the concrete foundation
5. Fit the cable duct if routing via the interior of the column. A plastic pipe of approximately 100mm outside diameter is recommended for this. Ensure this protrudes through the template by 50mm minimum.
6. Pour concrete ensuring that it is a mix of C35 to table 6 BS 8110 and then tamp down well
7. Fit the setting template over the four protruding studs, double-checking that they are level and that clear access can be gained to the cable duct if it is being used
8. Leave the concrete to cure for a minimum of 72 hours prior to attempting to erect the column
9. When fitting the column, ensure that the concrete base is in complete contact with the underside of the column and grout accordingly. Torque the nuts to 230-270 Nm (175-200 fl. lb.)
10. When the column has been fitted, protect the studs with a suitable protective coating. Denzo tape or similar is recommended for this


Foundation sizes are determined for three sets of wind speeds, which will cover most of the British Isles.

Area A = 44m/s (98mph)
Area B = 48m/s (107mph)
Area C = 52m/s (116mph)

Maximum gust speed is likely to be exceeded on average once every 50 years at 10m above the ground in open level country.



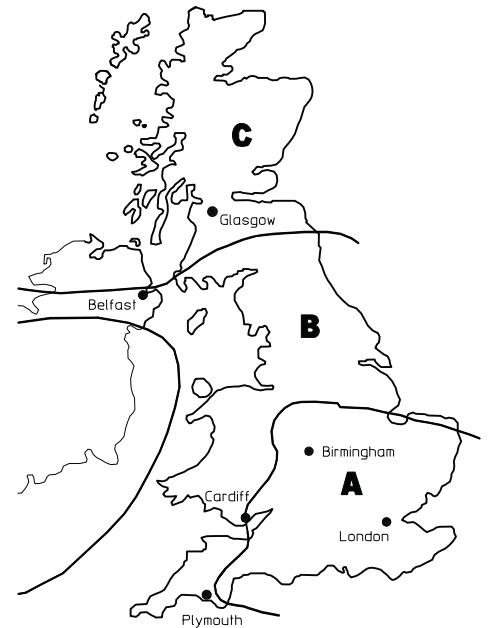


Plan View on RRB

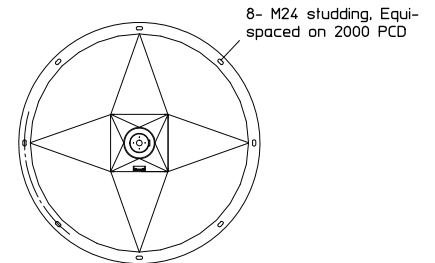


8- M24 studding. Equi-spaced on 2000 PCD

fig. 2

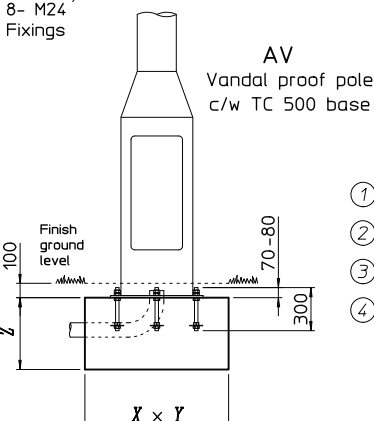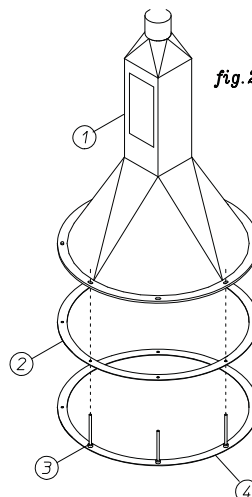


- ① Vandal proof pole
- ② Setting template
- ③ M24 Studding
- ④ Root plate

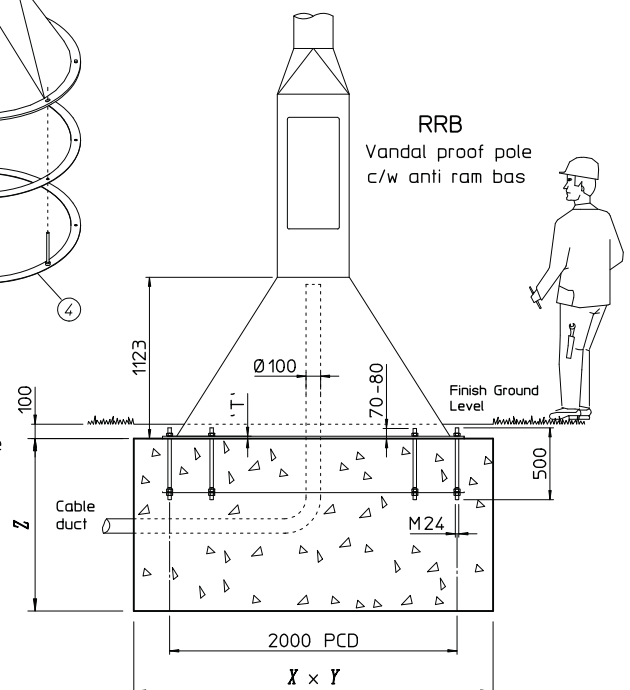

RRB
Vandal proof pole
c/w anti ram bas

fig. 1



ETP Range**CBTP Range**

The ETP and CBTP ranges are the very peak in CCTV mounting poles. With various options of built in or transferable electric or manual winches, the ranges enable cost-effective and more importantly safe camera maintenance at ground level. These columns have been designed within the Highways Agency specification and with their excellent reliability record, have become the number one choice in urban traffic monitoring schemes. The ETP range is a continuous parallel column, whereas the CBTP range has the added bonus of a spacious cabinet base at the bottom for more complex electrical and communications use. Both ranges can be seen in city centres and on trunk roads throughout the United Kingdom.

ETP Range

Design Features

- An ideal column for urban and traffic CCTV schemes.
- Designed in accordance with Highways Agency specification.
- Eliminates the use of mechanical lifts for servicing purposes.
- Camera maintenance carried out at ground level. The camera head rotates through 180 degrees for servicing purposes.
- Various built in and transferable winch options.
- In-built carriage failsafe braking mechanism.
- Excellent stability characteristics ensures minimal camera movement.
- Recommended for installation in high profile places.
- Suitable for all public access areas.
- Camera carriage unit has a self clamping mechanism to minimise deflection when in its working position.
- Totally concealed cable management facility.
- High security door option for high risk areas.
- Hot dipped galvanised finish for maximum weather protection and low maintenance requirements.
- Custom and bespoke versions tailored to the customer's requirements.

General Specifications

- Standard pan and tilt fixing of 101.6 PCD.
- Special dome mounting brackets available.
- Built in cable entry and exit points.
- Compatible with WEC adaptors, accessories and anti-climbs.
- Flange-mounted 'TC' type root.
- 'Pocket' type roots available for restricted foundation locations.
- Equipment loading up to 25kg.
- Variety of standard heights from 3 to 15 metres.

Product Codes

Economy Trolley Pole Range:

- ETP6
- ETP7
- ETP8
- ETP9
- ETP10
- ETP12
- ETP13
- ETP14
- ETP15

CBTP Range

Design Features

- An ideal column for urban and traffic CCTV schemes.
- Designed in accordance with Highways Agency specification.
- Eliminates the use of mechanical lifts for servicing purposes.
- Integral lockable cabinet base for housing telemetry, fibre optics, spurs etc.
- Camera maintenance carried out at ground level. The camera head rotates through 180 degrees for servicing purposes.
- Various built in and transferable winch options.
- In-built carriage failsafe braking mechanism.
- Excellent stability characteristics ensures minimal camera movement.
- Recommended for installation in high profile places.
- Suitable for all public access areas.
- Options include double door and split cabinets.
- Telecom cell scheme versions available.
- Camera carriage unit has a self clamping mechanism to minimise deflection when in its working position.
- Totally concealed cable management facility.
- High security and 'vault' door options for high risk areas.
- Hot dipped galvanised finish for maximum weather protection and low maintenance requirements.
- Custom and bespoke versions tailored to the customer's requirements.

General Specifications

- Standard pan and tilt fixing of 101.6 PCD.
- Special dome mounting brackets available.
- Built in cable entry and exit points.
- Compatible with WEC adaptors, accessories and anti-climbs.
- Flange-mounted 'TC' type root.
- 'Pocket' type roots available for restricted foundation locations.
- Equipment loading up to 25kg.
- Variety of standard heights from 3 to 15 metres.

Product Codes

Cabinet Based Trolley

Pole Range:


- CBTP6
- CBTP7
- CBTP8
- CBTP9
- CBTP10
- CBTP12
- CBTP13
- CBTP14
- CBTP15

Technical Specification

Model Ref.	'M' Height	Baseplate Option	HxW Winch aperture 'A'	HxW Equip. aperture 'B'	HxW Winch aperture 'C'	Maximum equip cap'ty	Weight Kgs
CBTP6	6 metres	4 Bolt	n/a	746x312	546x204	25Kg.	411Kg.
ETP6		4 Bolt	390x312	n/a	n/a	25Kg.	391Kg.
CBTP8	8 metres	4 Bolt	n/a	746x312	546x204	25Kg.	491Kg.
ETP8		4 Bolt	390x312	n/a	n/a	25Kg.	471Kg.
CBTP10	10 metres	8 Bolt	n/a	746x312	546x204	25Kg.	573Kg.
ETP10		8 Bolt	390x312	n/a	n/a	25Kg.	553Kg.
CBTP12	12 metres	8 Bolt	n/a	746x312	546x204	25Kg.	659Kg.
ETP12		8 Bolt	390x312	n/a	n/a	25Kg.	639Kg.
CBTP14	14 metres	8 Bolt	n/a	746x312	546x204	25Kg.	715Kg.
ETP14		8 Bolt	390x312	n/a	n/a	25Kg.	695Kg.
CBTP15	15 metres	8 Bolt	n/a	746x312	546x204	25Kg.	780Kg.
ETP15		8 Bolt	390x312	n/a	n/a	25Kg.	760Kg.

All dimensions in mm unless otherwise stated

The trolley pole product range has the option of built-in or transferable winches, either electrically operated or hand operated gear winch

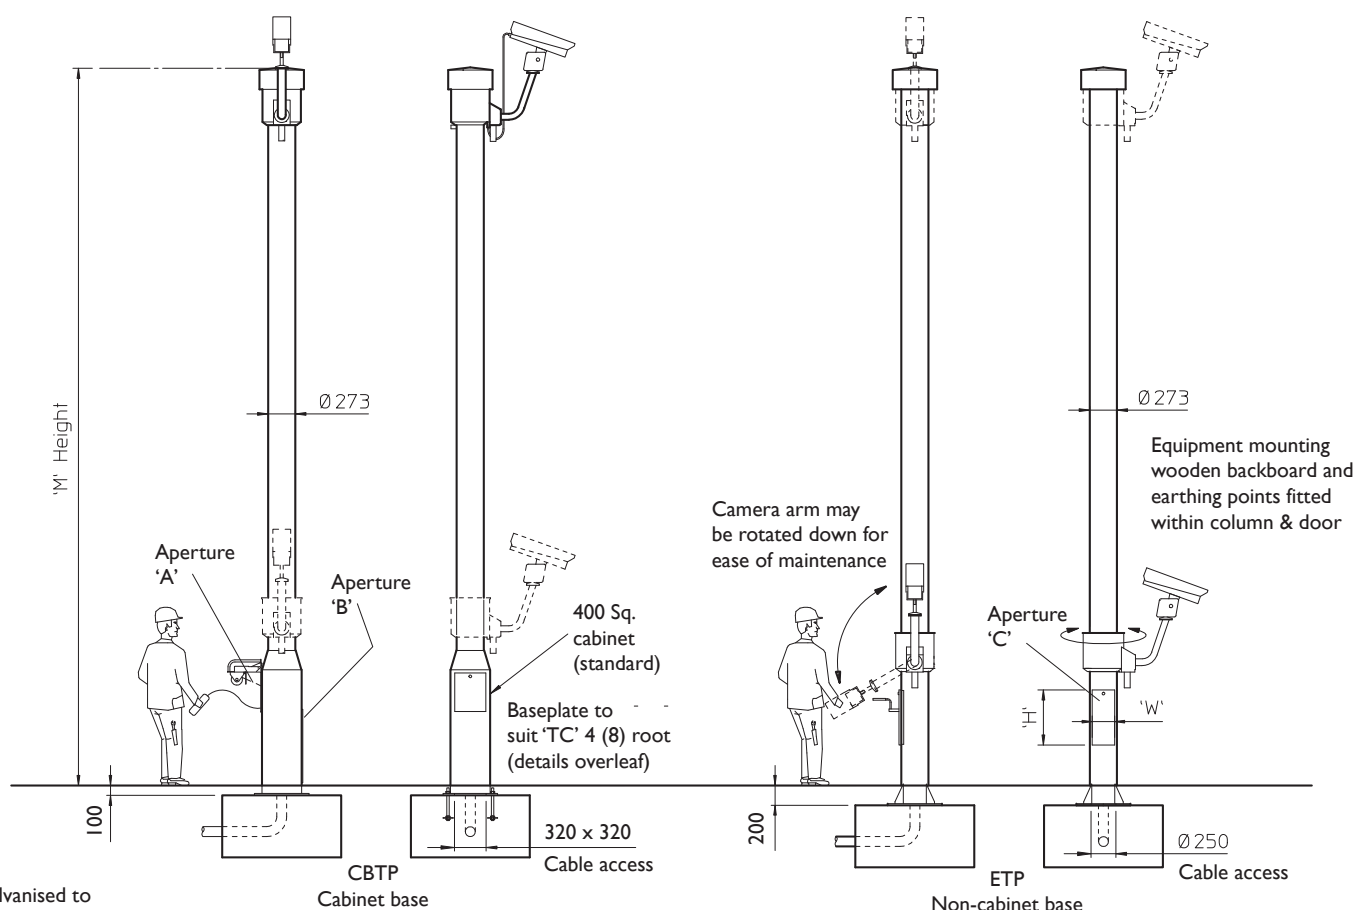

Galvanised to
BS EN ISO 1461:1999

Options & Accessories

- Enlarged cabinet (standard 400 Sq.)
- All pan/tilt, dome, fixed camera mount bracketry
- Double door access (partitioned cabinet)
- Cable management system up to 12 metres
- On-site erecting service onto a prepared base
- 4 point high security door
- Paint to BS4800 & RAL colours
- Tamperproof micro-switches for cabinet door

Product Ref & Ordering Information

Product Ref & Ordering Information

CB (E) TP 8 nn

Cabinet Based Column

Non-Cabinet Base


Trolley Pole

Column Height in Metres

Winch Option

see overleaf for range

Cabinet Based & Economy Trolley Pole ETP and CBTP Accessories

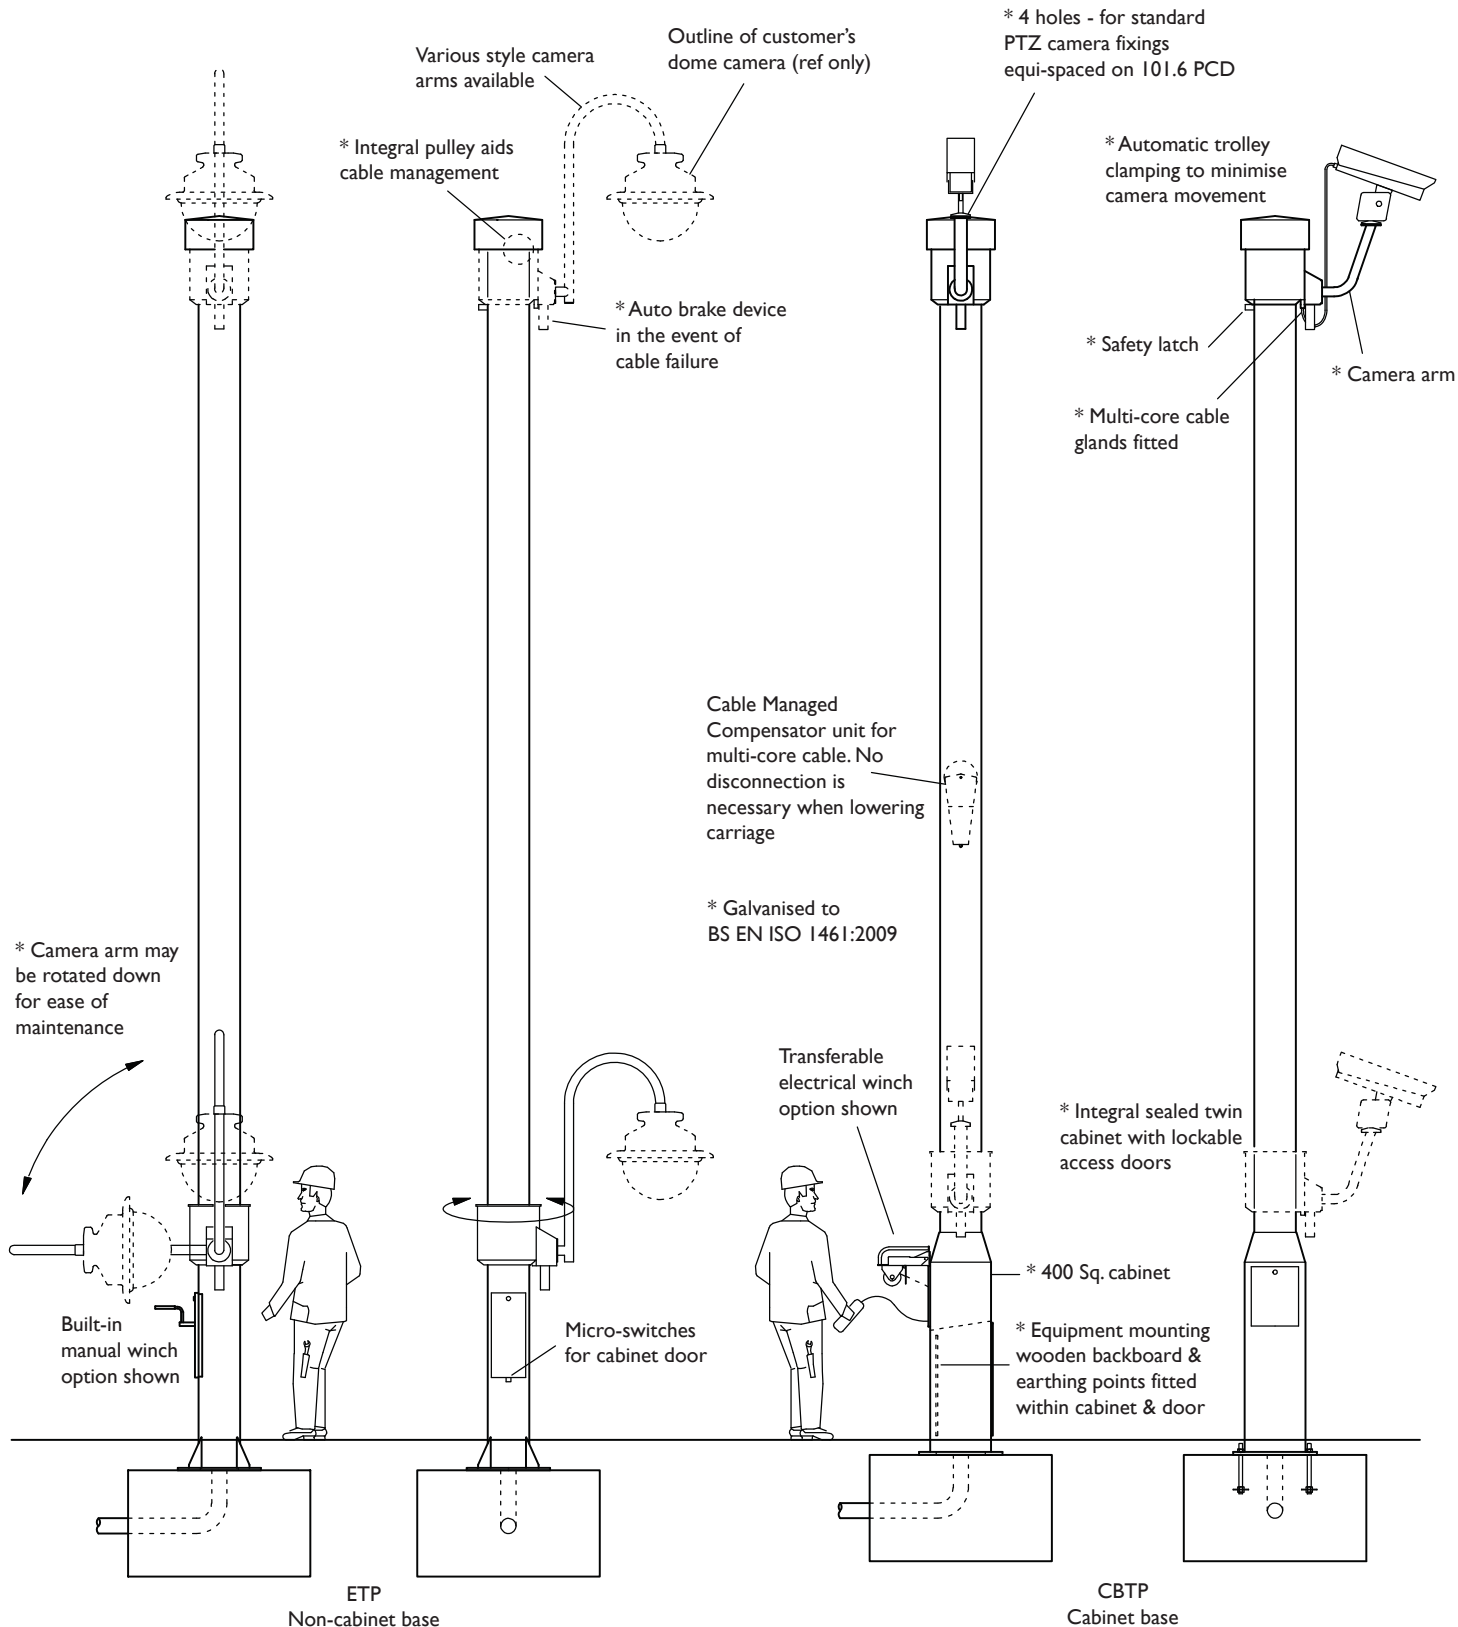

All items marked with * are fitted as standard
See Features and Options sheet overleaf for full details

The trolley pole product range has the option of built-in or transferable winches, with either electrically operated or hand operated gear winch

Options for CBTP & ETP Range

HT	Transferable manual winch
HB	Manual winch built into column
EH	Spare winch handle
CM	Cable management
500	Enlarged cabinet size of 500mm Sq.
2C	Separate compartments in cabinet
EDK	Spare cabinet door keys
PKT	Alternative 'pocket' type root fixing
ET	Transferable electric winch (Pat.No. 0019862.2)
EBA	Electric winch built into column
PS	Spare pendant for EBR
110V	110V transformer for EBA or EBR

General Options for CBTP & ETP Range

- Cable management system - fitting compensator & customer free issue cable
- High security door
- Vault type door (4 point locking)
- 500 cabinet base (CBTP only)
- On-site erecting service onto a prepared base
- Painting finishes in BS4800 and RAL colours
- Swept dome adaptors for dome type cameras
- Tamperproof micro-switched for cabinet door

Full Cable Management


WEC offer full cable management within the trolley pole up to 12 metres. This feature eliminates the need to disconnect the camera multi-core cable, when the camera is lowered to the maintenance position.

Delivery and Erection

WEC offers a full delivery and column erecting service onto a prepared concrete base, anywhere within the UK.

Delivery and Placement


WEC offers a full project management level of delivery and installation. Despite not carrying out the civil work, we offer advice on optimum site location, concrete base sizes (standard and specials), along with placement of pole onto concrete plinth through to commissioning on site.

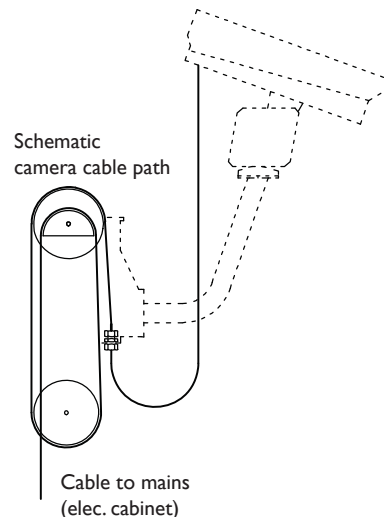

Base and Windload Specification



Concrete Foundation Table X x Y x Z							
Model Ref	Height	Area of Country			Area of Town		
		A	B	C	A	B	C
CBTP6 ETP6	6m	1.1x1.1x 0.55m Dp.	1.2x1.2x 0.6m Dp.	1.3x1.3x 0.65m Dp.	1.1x1.1x 0.55m Dp.	1.2x1.2x 0.6m Dp.	1.2x1.2x 0.6m Dp.
CBTP8 ETP8	8m	1.4x1.4x 0.7m Dp.	1.5x1.5x 0.75m Dp.	1.5x1.5x 0.75m Dp.	1.3x1.3x 0.65m Dp.	1.3x1.3x 0.65m Dp.	1.4x1.4x 0.7m Dp.
CBTP10 ETP10	10m	1.5x1.5x 0.75m Dp.	1.6x1.6x 0.8m Dp.	1.7x1.7x 0.85m Dp.	1.4x1.4x 0.7m Dp.	1.5x1.5x 0.75m Dp.	1.6x1.6x 0.8m Dp.
CBTP12 ETP12	12m	1.7x1.7x 0.85m Dp.	1.8x1.8x 0.9m Dp.	1.9x1.9x 0.95m Dp.	1.6x1.6x 0.8m Dp.	1.7x1.7x 0.85m Dp.	1.8x1.8x 0.9m Dp.
CBTP14 ETP14	14m	1.9x1.9x 0.95m Dp.	2.0x2.0x 1.0m Dp.	2.1x2.1x 1.05m Dp.	1.8x1.8x 0.9m Dp.	1.9x1.9x 0.95m Dp.	2.0x2.0x 1.0m Dp.
CBTP15 ETP15	15m	2.0x2.0x 1.0m Dp.	2.1x2.1x 1.05m Dp.	2.2x2.2x 1.1m Dp.	1.9x1.9x 0.95m Dp.	2.0x2.0x 1.0m Dp.	2.1x2.1x 1.05m Dp.

A minimum soil bearing pressure of 75 KN/m² is assumed

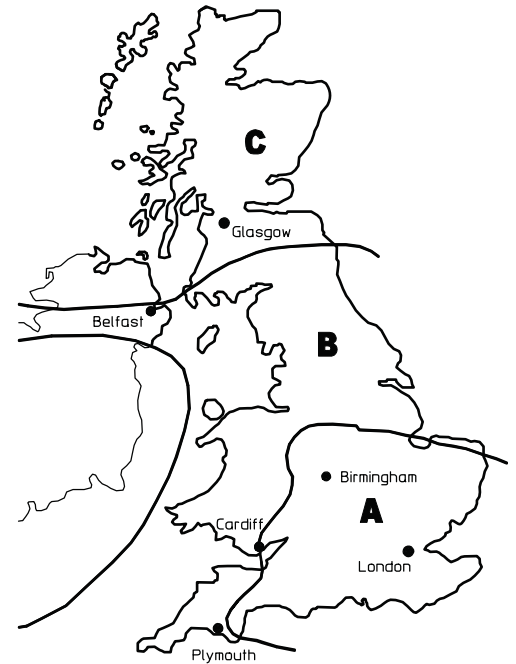


Installation Method

1. From the map, select location of installation
2. Excavate as per recommended area and depth
3. Assemble root base as shown in fig. 1
4. Insert root base into the hole ensuring that it is level and that the four studs protrude 60-70mm above the concrete foundation
5. Fit the cable duct if routing via the interior of the column. A plastic pipe of approximately 100mm outside diameter is recommended for this. Ensure this protrudes through the template by 50mm minimum.
6. Pour concrete ensuring that it is a mix of C35 to table 6 BS 8110 and then tamp down well
7. Fit the setting template over the four protruding studs, double-checking that they are level and that clear access can be gained to the cable duct if it is being used
8. Leave the concrete to cure for a minimum of 72 hours prior to attempting to erect the column
9. When fitting the column, ensure that the concrete base is in complete contact with the underside of the column and grout accordingly. Torque the nuts to 230-270 Nm (175-200 fl. lb.)
10. When the column has been fitted, protect the studs with a suitable protective coating. Denzo tape or similar is recommended for this

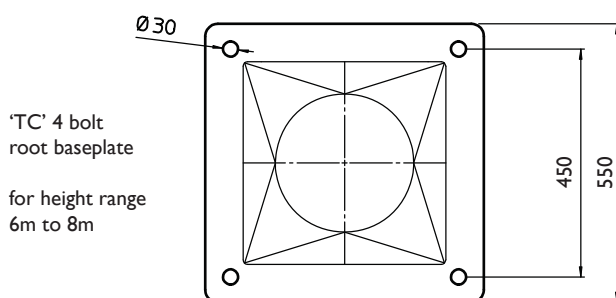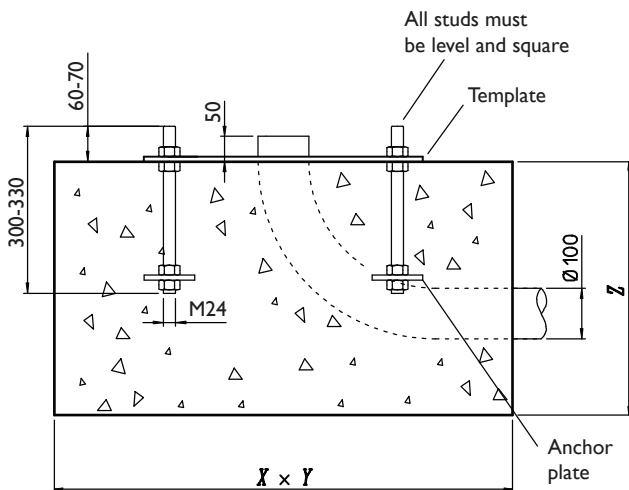

'TC' 4 bolt
root baseplate

for height range
6m to 8m

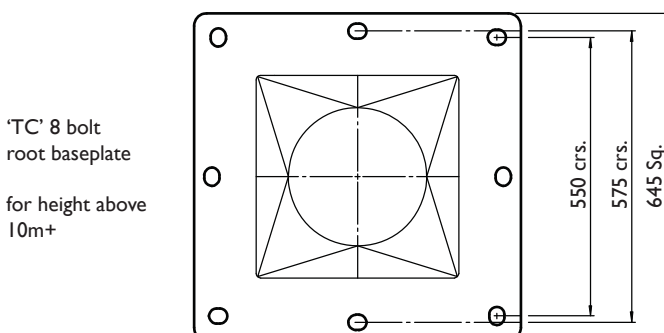



'TC' 8 bolt
root baseplate

for height above
10m+

Option

Highways Agency Flange
8 bolt root

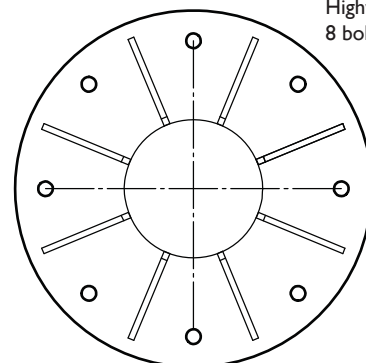

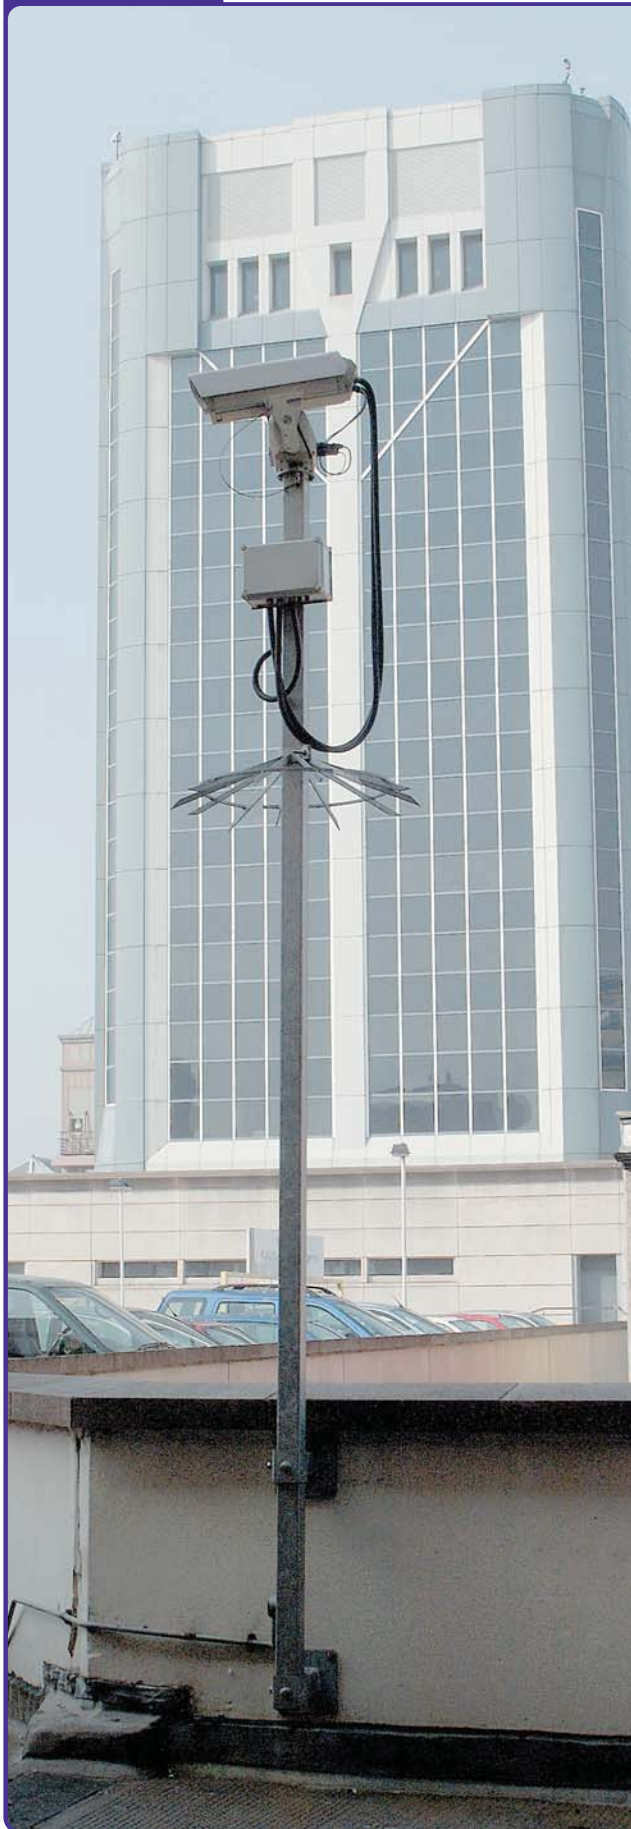Wall Poles

Wall Poles

The WP and CP ranges have, for many years, provided the industry standard solution for many camera mounting situations. Available in standard heights up to 6 metres with stand off brackets from flush to 1000mm, both the wall and corner poles provide an excellent platform for obtaining an elevated viewpoint from existing structures.

Design Features

- A cost-effective solution for achieving desired camera height.
- Off the shelf heights up to 6 metres.
- Standard models give up to 4 metres clearance above roofs, parapets and walls.
- Rigid structure ensures excellent stability characteristics.
- Various stand off brackets to clear facias, gutters and copings.
- Modular construction for ease of transportation and erection.
- Wall and corner mounted versions available.
- Hot dipped galvanised finish for maximum weather protection and low maintenance requirements.
- Custom and bespoke versions tailored to the customer's requirements.

General Specifications

- Standard pan and tilt fixing of 101.6 PCD.
- Stand off brackets 000mm/150mm/300mm/500mm/1000mm.
- Compatible with WEC adaptors, accessories and anti-climbs.
- Equipment loading up to 25kg.
- Variety of standard heights up to 6 metres.

Product Codes

- 2.5WP000, 2.5WPI150*, 2.5WP300*, 2.5WP500*, 2.5WPI000
- 3WP000, 3WPI150, 3WP300, 3WP500, 3WPI000
- 4WP000, 4WPI150*, 4WP300*, 4WP500*, 4WPI000
- 5WP000, 5WPI150*, 5WP300*, 5WP500*, 5WPI000
- 6WP000, 6WPI150*, 6WP300*, 6WP500*, 6WPI000
- 2.5CP000, 2.5CPI150*, 2.5CP300*, 2.5CP500*, 2.5CPI000
- 3CP000, 3CPI150, 3CP300, 3CP500, 3CPI000
- 4CP000, 4CPI150*, 4CP300*, 4CP500*, 4CPI000
- 5CP000, 5CPI150*, 5CP300*, 5CP500*, 5CPI000
- 6CP000, 6CPI150*, 6CP300*, 6CP500*, 6CPI000


*Ex-stock items



Technical Specification

Model Ref. (nnn stand off)	Height 'H'	Approx spacing 'B'	Stand off distance 0	Stand off distance 150	Stand off distance 300	Stand off distance 500	Stand off distance 1000
2.5WP	2.5 mtrs.	850	✓	✓	✓	✓	✓
2.5CP	2.5 mtrs.	850	✓	✓	✓	✓	✓
3WP	3.0 mtrs.	1000	✓	✓	✓	✓	✓
3CP	3.0 mtrs.	1000	✓	✓	✓	✓	✓
4WP	4.0 mtrs.	1300	✓	✓	✓	✓	✓
4CP	4.0 mtrs.	1300	✓	✓	✓	✓	✓
5WP	5.0 mtrs.	1700	✓	✓	✓	✓	✓
5CP	5.0 mtrs.	1700	✓	✓	✓	✓	✓
6WP	6.0 mtrs.	2000	✓	✓	✓	✓	✓
6CP	6.0 mtrs.	2000	✓	✓	✓	✓	✓


Technical Specification

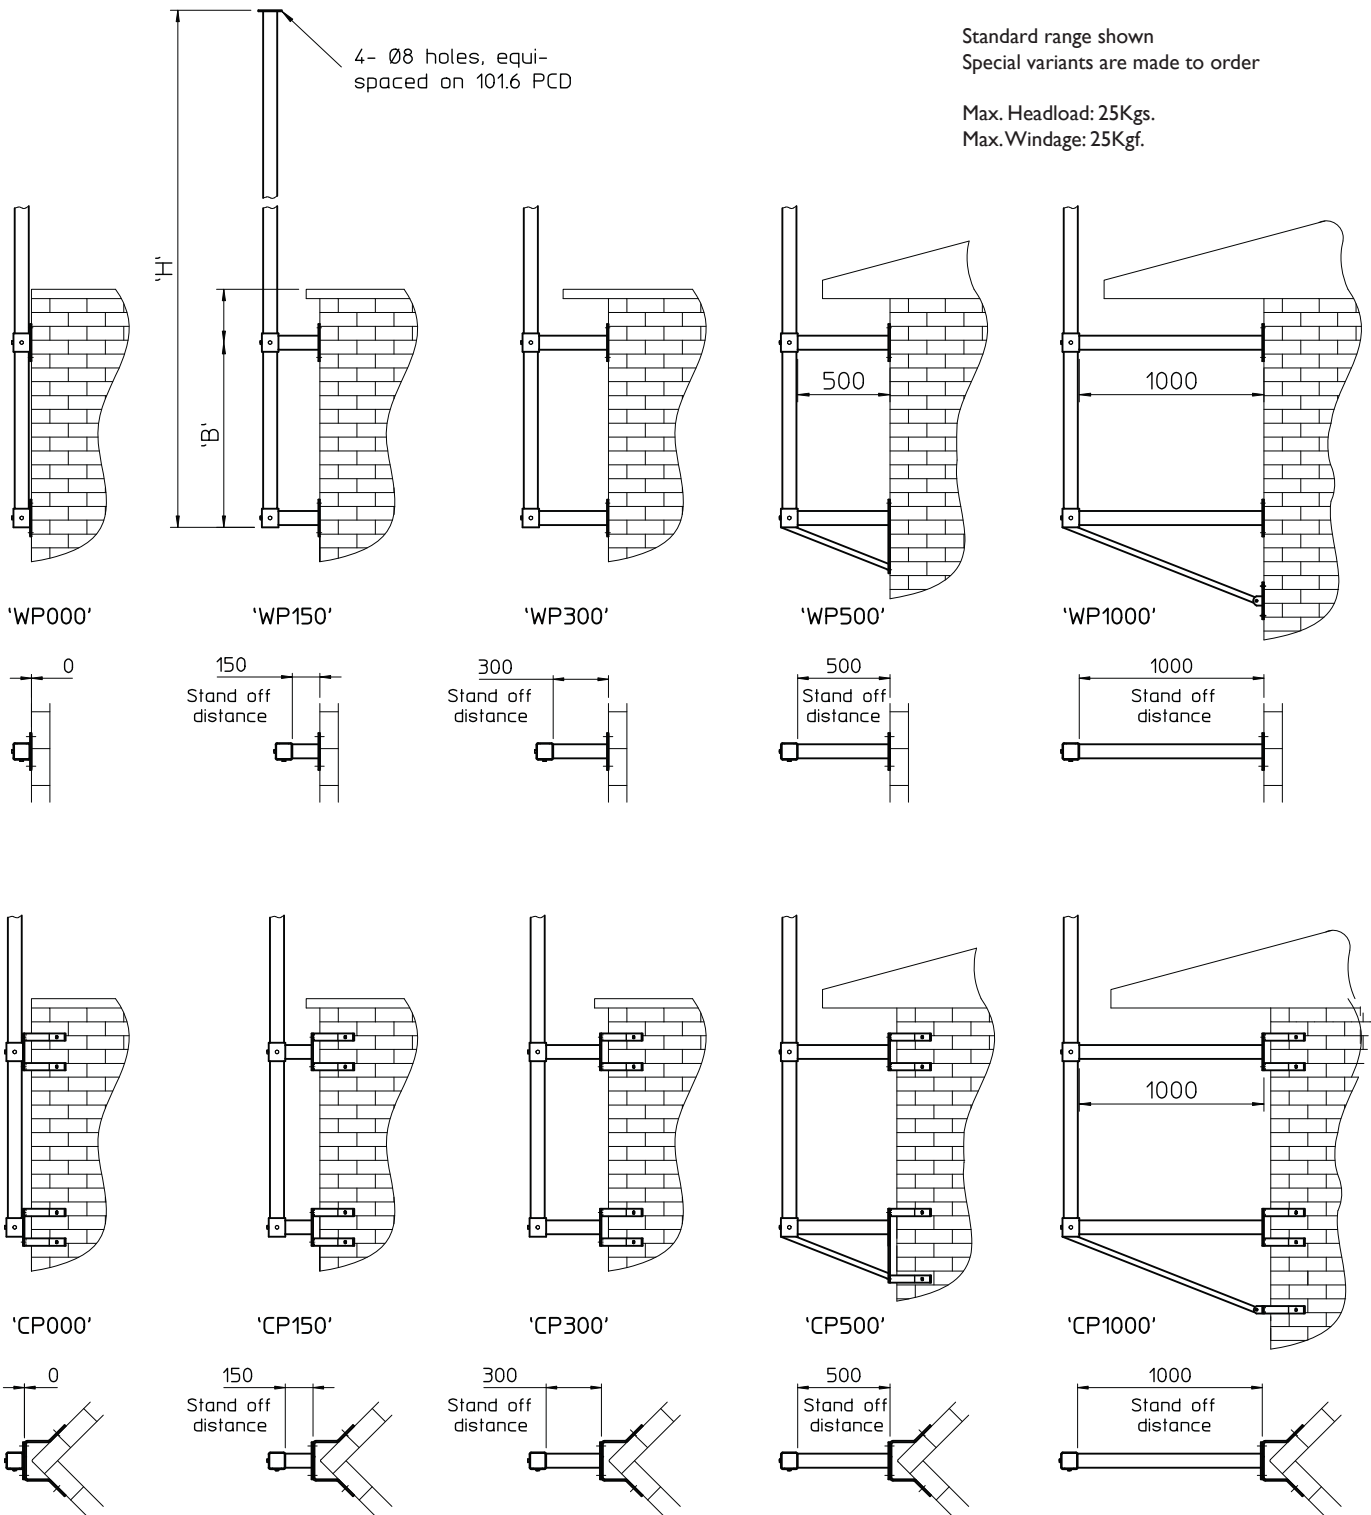


Standards Applicable

- Structural Steelwork: BS EN 10210-1:1994, BS EN 10210-2:1997
- General Steelwork: BS1449:1991, BS1387:1985, BS EN 10025:1993
- Hot Dipped Galvanized: BS EN ISO 1461:2009
- Welding Procedures: Comply with BS EN 1011-2:2001
- Fasteners: Grade 8.8 BS3692:2001, BS4190:2001, DIN931, DIN934
- Design Wind Loading: In accordance with CP3, chapter V Pt 2 & BS 6399 Pt 2:1997
- Paint Finishes: BS4800 and RAL colour range

Product Ref & Ordering Information

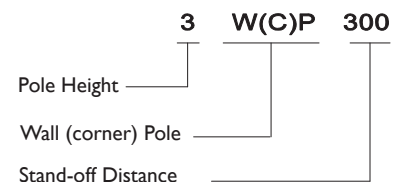


Technical Specification

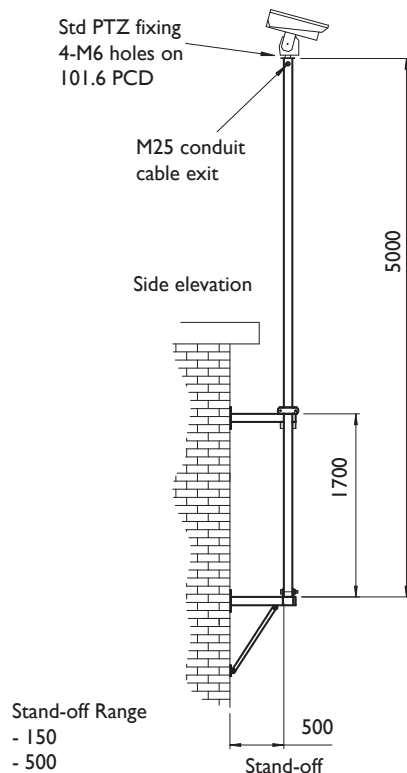


Wall Mounted Tilt-Down Pole
Model Ref Shown: 5WPTD500

Height Range
- 2.5m
- 3.0m
- 4.0m
- 5.0m
- 6.0m

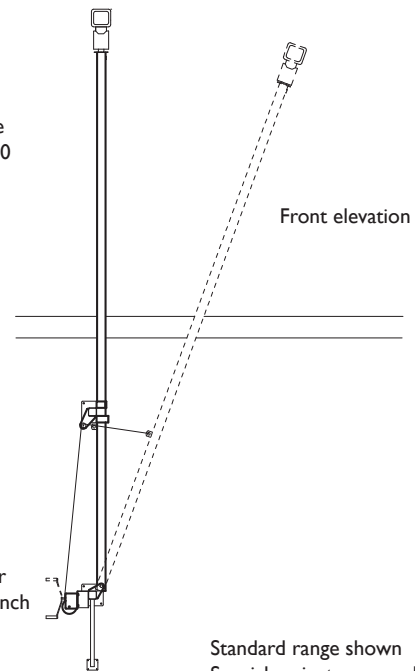

Standard range shown
Special variants are made to order


Max. Headload: 25Kgs.
Max. Windage: 25Kgf.

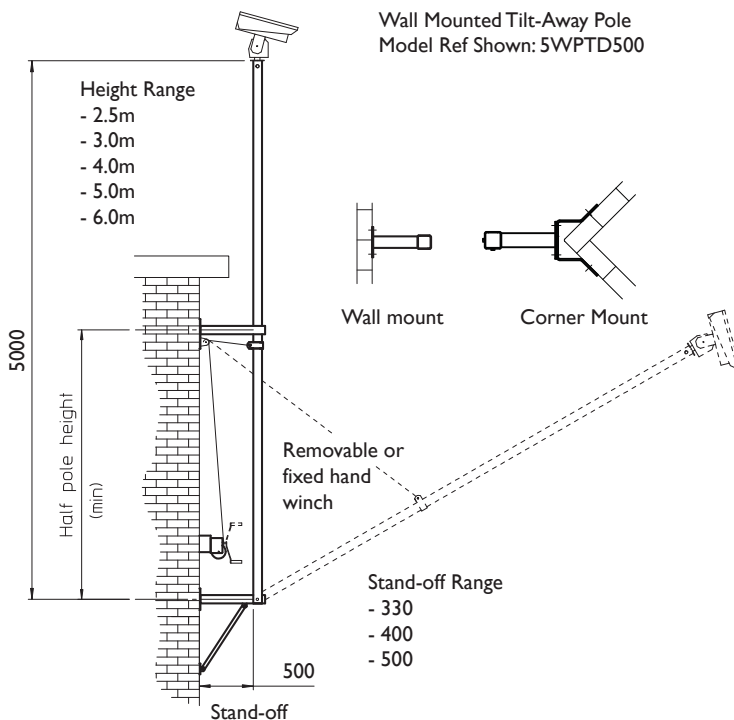

Wall Mounted Tilt-Away Pole
Model Ref Shown: 5WPTA500

Height Range
- 2.5m
- 3.0m
- 4.0m
- 5.0m
- 6.0m

Parapet Mounted Tilt-Away Pole
Model Ref Shown: 4PMTA150

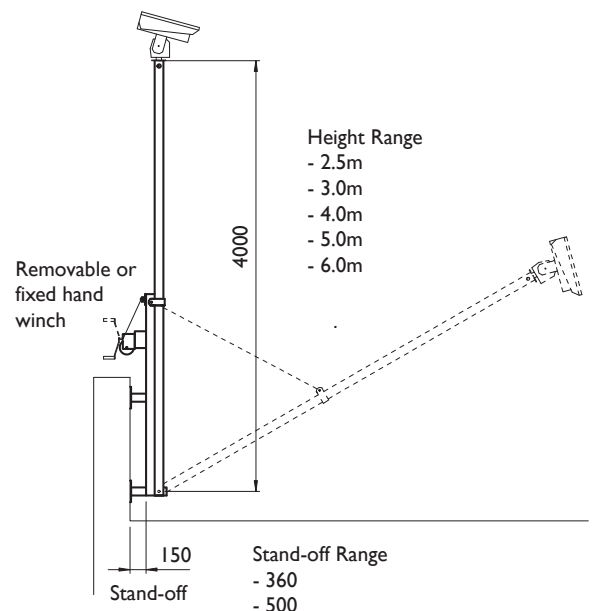


Height Range
- 2.5m
- 3.0m
- 4.0m
- 5.0m
- 6.0m

Standards Applicable

- Structural Steelwork: BS EN 10210-1:1994, BS EN 10210-2:1997
- General Steelwork: BS1449:1991, BS1387:1985, BS EN 10025:1993
- Hot Dipped Galvanized: BS EN ISO 1461:2009
- Welding Procedures: Comply with BS EN 1011-2:2001
- Fasteners: Grade 8.8 BS3692:2001, BS4190:2001, DIN931, DIN934
- Design Wind Loading: In accordance with CP3, chapter V Pt 2 & BS 6399 Pt 2:1997
- Paint Finishes: BS4800 and RAL colour range

Product Ref & Ordering Information

	4	W(C)P	TA(D)	300
Pole Height				
Wall (corner) Pole				
Tilt Away (Down)				
Stand-off Distance				

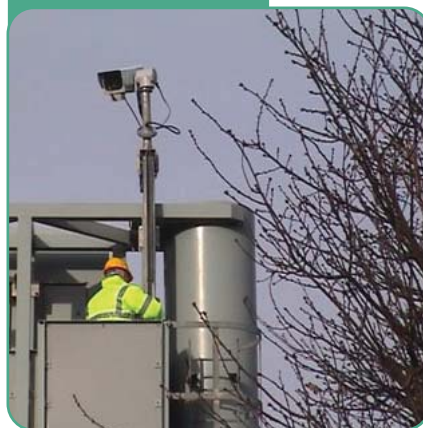Gantry Mounted Poles**Gantry Brackets****Gantry Brackets****Gantry Brackets****Motorway Poles**

Our highways division specialises in the design, manufacture and installation of various motorway poles and brackets. We can offer full site surveys and commissioning for customers requiring a more bespoke product.



Enclosures

WEC offers a wide range of road side cabinets, from standard off the shelf products to those tailor made to specific customer requirements.

The standard road side cabinets are available in a variety of sizes and manufactured from materials such as stainless steel, aluminium or with a galvanised finish. These standard cabinets include an extensive range of hardware and can even be fully wired and terminated to suit the customer's requirements. Furthermore, WEC's road side cabinets are available in a comprehensive selection of colours and on a short lead time basis.

WEC is able to manufacture and supply road side cabinets to customer drawings and offer a design service to produce cabinets tailored to customer requirements.


Sales Direct: +44 (0) 1254 700200

Fax: +44 (0) 1254 873637 Website: www.wec.uk.net Email: all@wec.uk.net

Technical Specification

Model Ref.	Height 'H'	Width 'W'	Depth 'D'	Working depth 'A'	Door aperture h ¹ x w ¹	Backboard height x width
RC9/65/6	900	650	600	530	690x400	740x400
RC153	1000	500	300	230	790x400	840x400
RC113	1000	1000	300	230	790x900	840x900
RC114	1000	1000	400	330	790x900	840x900
RC115	1000	1000	500	430	790x900	840x900
RC116	1000	1000	600	530	790x900	840x900
RC1/13/4	1000	1300	400	330	790x1200	840x1200
RC1/13/5	1000	1300	500	430	790x1200	840x1200
RC1/13/6	1000	1300	600	530	790x1200	840x1200
RC1/14/6	1000	1400	600	530	790x1300	840x1300
RC13/12/5	1300	1200	500	430	1090x1100	1140x1100
RC15/143/5	1500	1430	500	430	1290x1330	1340x1330

All dimensions in mm unless otherwise stated

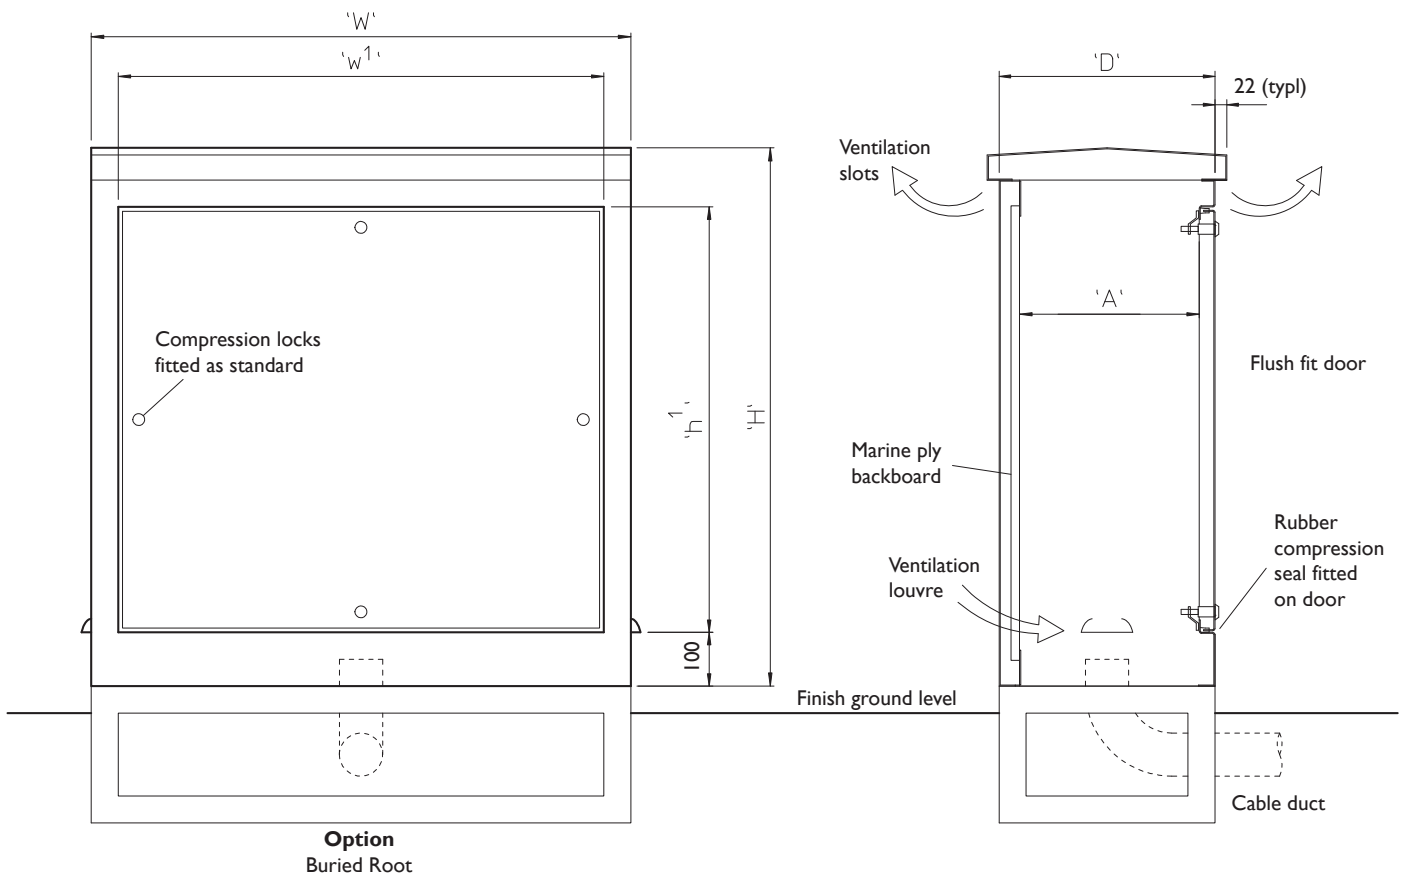

All our road side cabinets are constructed from stainless steel (3CR12) and powder coated with a black finish as standard

Options & Accessories

RC/HSD High security locking system
 RC/4PL Extra high security 4 point lock system
 RC/A4 Document holder (A4)
 RC/Col Paint to BS4800 & RAL colours
 RC/F Fixed fan & dust extraction
 RC/19F Fixed 19" racking
 RC/19H Swing out 19" racking
 RC/IP65 IP65 rated cabinet

Door may be specified as hinged (either hand) or lift out

Double door access on twin compartments

Treated equipment mounting backboard or shelving

Product Ref & Ordering Information



RC 114 HSD
 Roadside Cabinet
 1000H x 1000W x 400D
 High Security Door
 option reference

Accessories





All dimensions in mm
unless otherwise stated



ACB1
Anti Climb Guard
ST & WD Tower





ACB2/ (state diam)
Anti Climb Guard
Circular Columns





ACB3/ (state Section)
Anti Climb Guard
Square Columns

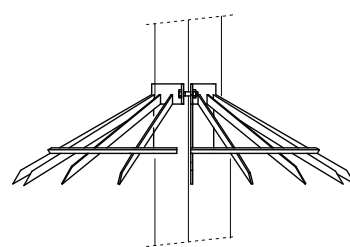

ACBW
Anti Climb Bracket Wall



ACBC
Anti Climb Bracket Corner

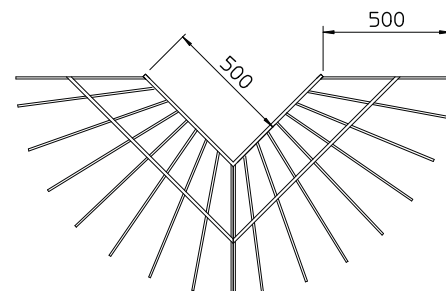

Standards Applicable

General Steelwork:

BS 1449:1991, BS 1387:1985
BS EN 10025:1993

Structural Steelwork:

BS EN 10210-1:1994
BS EN 10210-2:1997

Hot Dipped Galvanized:

BS EN ISO 1461:2009

Welding Procedures:

Comply with BS EN 1011-2:2001

Fasteners:

Grade 8.8 BS 3692:2001
BS 4190:2001 DIN931, DIN934

Design Wind Loading:

In accordance with CP3 chapter
V Pt 2 & BS 6399 Pt 2:1997

Paint finishes:


BS 4800 & RAL colour range




All WEC products are subject to ongoing development. Therefore, we reserve the right to make technical modifications without notice.
BRITANNIA HOUSE, JUNCTION STREET, DARWEN, LANCASHIRE, BB3 2RB. TEL: (01254) 700200. FAX: (01254) 873637. E-MAIL: all@wec.uk.net

All dimensions in mm unless otherwise stated


HB600 Wall mount 600 (1000) long c/w swivel
HB1000

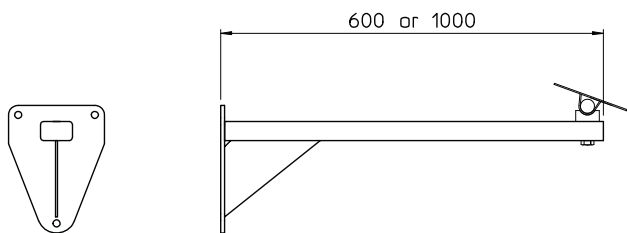


TCA
Tower Clamp Adaptor to
suit WD & ST Towers




PCA1\ ___ (column size)
Pole Clamp Adaptor
to suit one fixed housing




PCA2\ ___ (column size)
Pole Clamp Adaptor
to suit two fixed housings

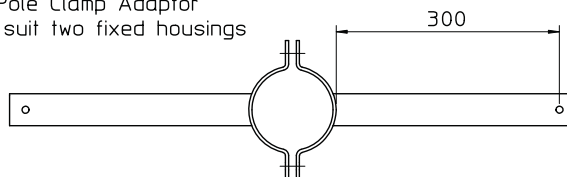

PCA3\ ___ (column size)
Pole Clamp Adaptor
to suit three fixed housings

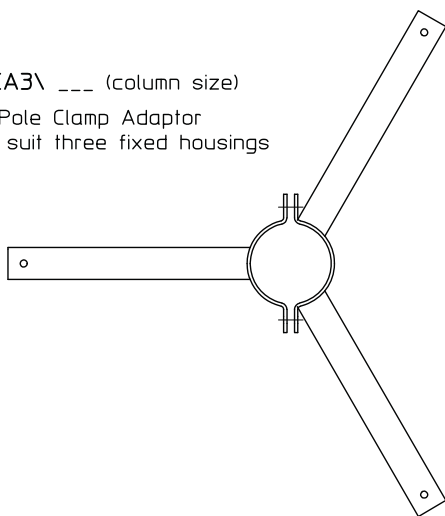

PCA4\ ___ (column size)
Pole Clamp Adaptor
to suit four fixed housings

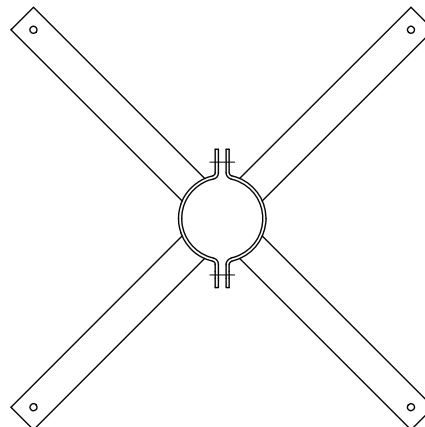

Standards Applicable

General Steelwork:
BS 1449:1991, BS 1387:1985
BS EN 10025:1993

Structural Steelwork:
BS EN 10210-1:1994
BS EN 10210-2:1997

Hot Dipped Galvanized:
BS EN ISO 1461:2009

Welding Procedures:
Comply with BS EN 1011-2:2001


Fasteners:
Grade 8.8 BS 3692:2001
BS 4190:2001 DIN931, DIN934

Design Wind Loading:
In accordance with CP3 chapter
V Pt 2 & BS 6399 Pt 2:1997


Paint finishes:
BS 4800 & RAL colour range

All dimensions in mm unless otherwise stated


HDPTC
corner mount

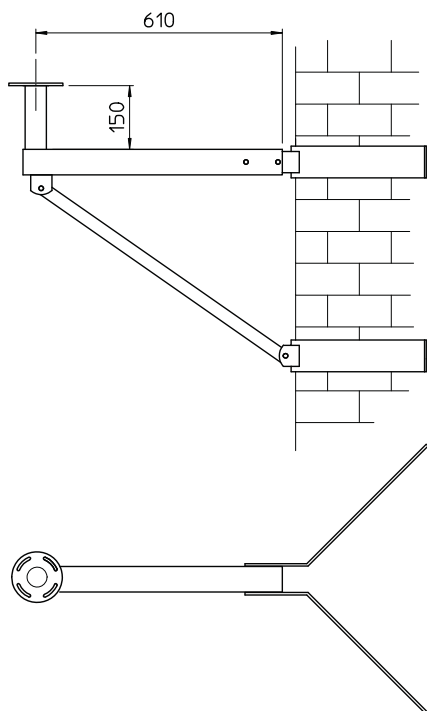


HDPTW
Wall mount

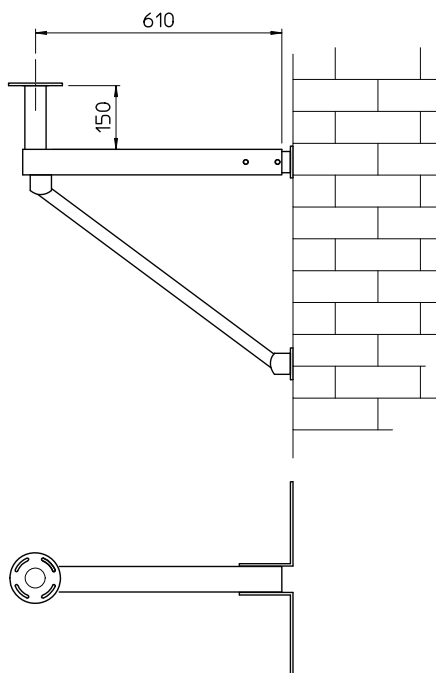

HD300C
corner mount

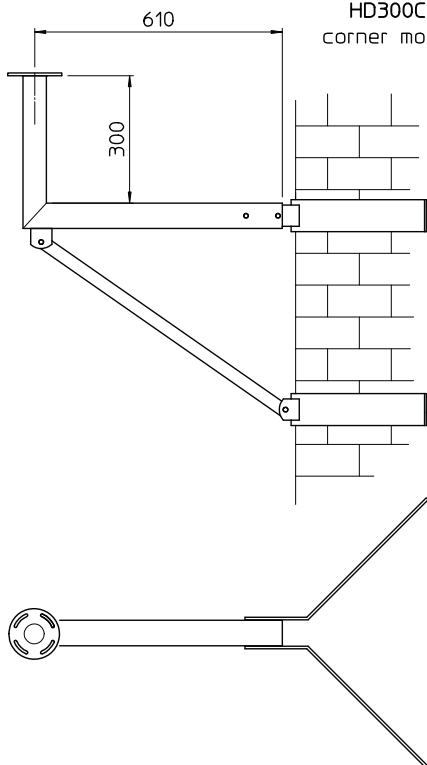

HD300W
Wall mount

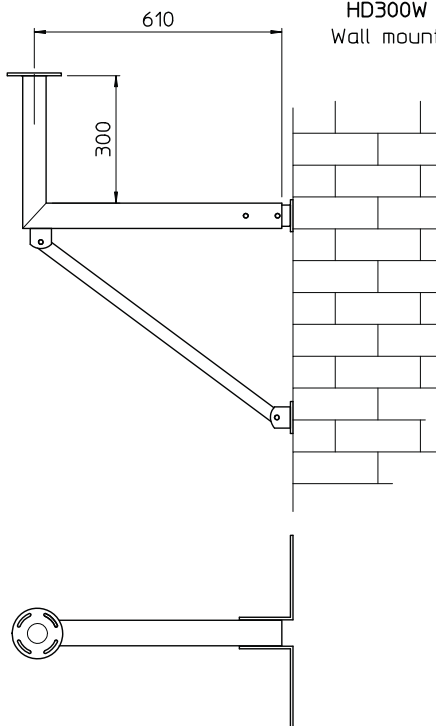

Standards Applicable

General Steelwork:

BS 1449:1991, BS 1387:1985
BS EN 10025:1993

Structural Steelwork:

BS EN 10210-1:1994
BS EN 10210-2:1997

Hot Dipped Galvanized:

BS EN ISO 1461:2009

Welding Procedures:

Comply with BS EN 1011-2:2001

Fasteners:

Grade 8.8 BS 3692:2001
BS 4190:2001 DIN931, DIN934

Design Wind Loading:

In accordance with CP3 chapter
V Pt 2 & BS 6399 Pt 2:1997

Paint finishes:

BS 4800 & RAL colour range




All WEC products are subject to ongoing development. Therefore, we reserve the right to make technical modifications without notice.
BRITANNIA HOUSE, JUNCTION STREET, DARWEN, LANCASHIRE, BB3 2RB. TEL: (01254) 700200. FAX: (01254) 873637. E-MAIL: all@wec.uk.net

External Brackets - Pan & Tilt Camera HD PTZ Range


All dimensions in mm unless otherwise stated

corner mount

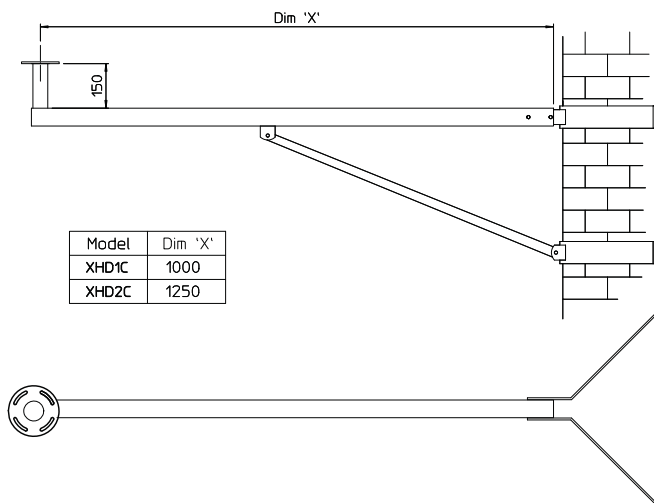


Model	Dim 'X'
XHD1C	1000
XHD2C	1250


Wall mount

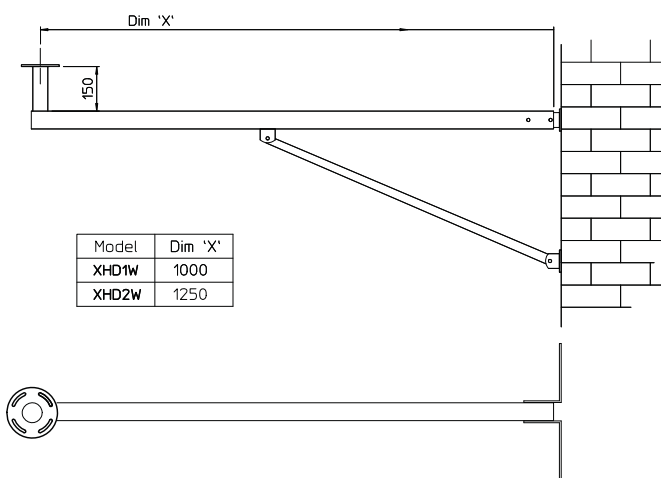

Model	Dim 'X'
XHD1W	1000
XHD2W	1250

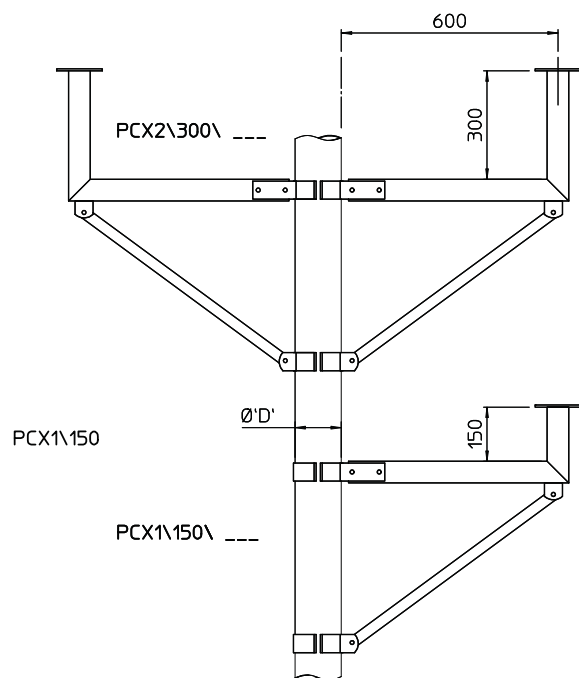



- PCX1\150\ --- Clamp on boom (600), 150 upstand, State Column dia.
- PCX1\300\ --- Clamp on boom (600), 300 upstand, State Column dia.
- PCX2\150\ --- Dual Clamp on boom (600), 150 upstand, State Column dia.
- PCX2\300\ --- Clamp on boom (600), 300 upstand, State Column dia.

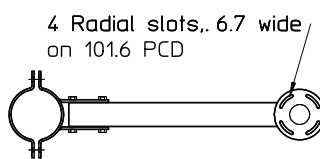


TOB\1000\ --- (state column dia)

Tubular Offset Bracket for PTZ

TOB\1500\ --- (state column dia)

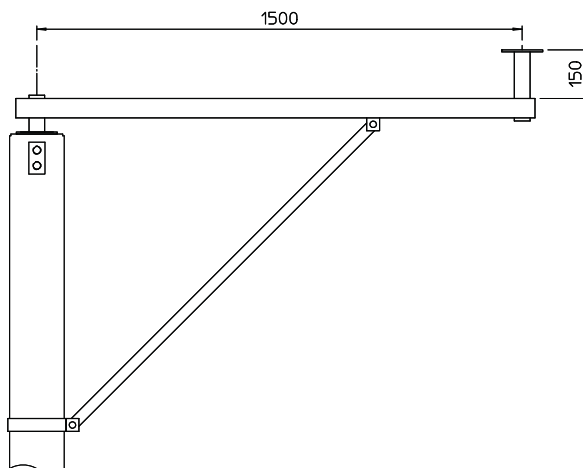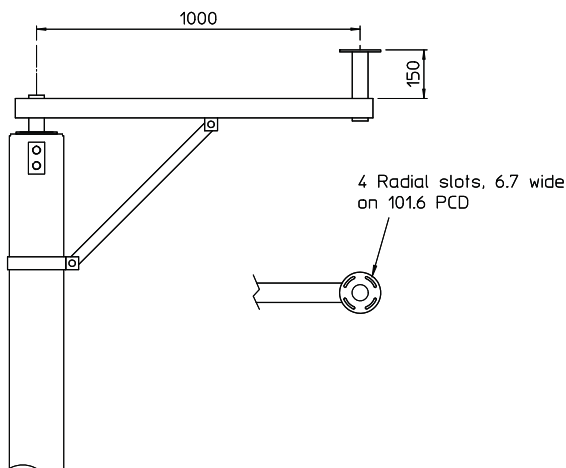



Model C450
Wall Mount Cage

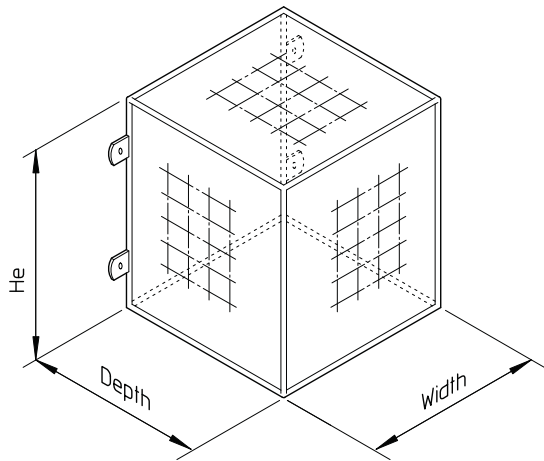

Description


C450	7d
C450H	as above, but hinged from wall
C600	610h x 610w
C600H	as above, but hinged from wall
C646	610h x 450w x 610d
C600H	as above, but hinged from wall

Model C600H
Wall Mount Cage (Hinged)

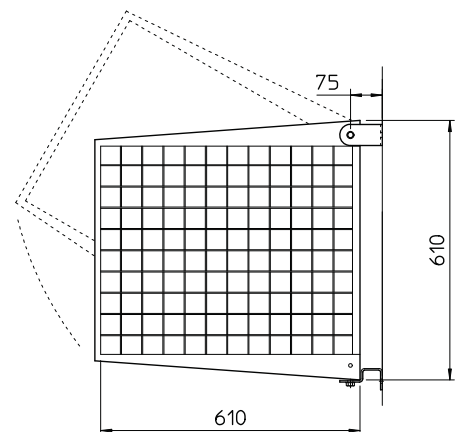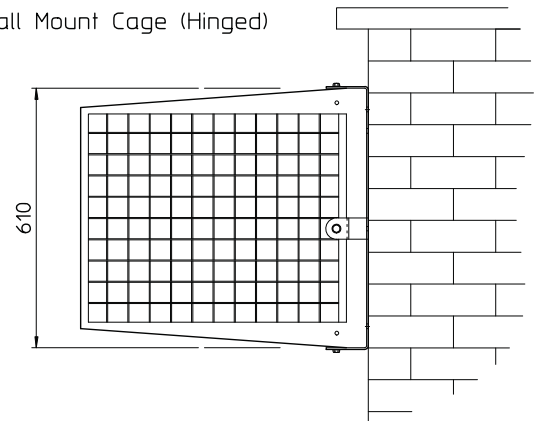


Plan Elevation

Model RWC300
Redwall cage



6-Ø8 holes



Standards Applicable

General Steelwork:
BS 1449:1991, BS 1387:1985
BS EN 10025:1993

Structural Steelwork:
BS EN 10210-1:1994
BS EN 10210-2:1997

Hot Dipped Galvanized:
BS EN ISO 1461:2009

Welding Procedures:
Comply with BS EN 1011-2:2001



Fasteners:
Grade 8.8 BS 3692:2001
BS 4190:2001 DIN931, DIN934

Design Wind Loading:
In accordance with CP3 chapter
V Pt 2 & BS 6399 Pt 2:1997



Paint finishes:
BS 4800 & RAL colour range

Model C/TPM

Pole Top Cage for PTZ Cameras

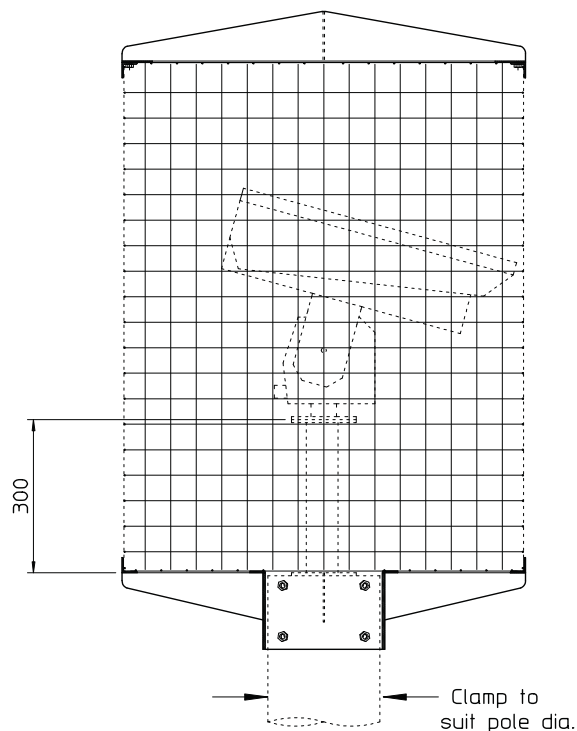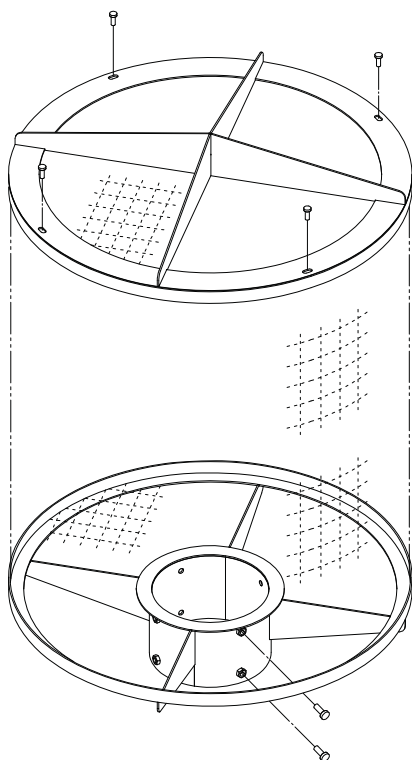

Bespoke Security Window Grilles

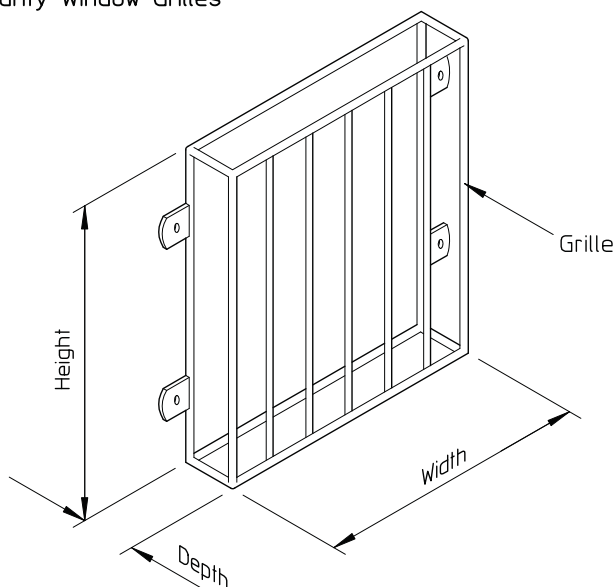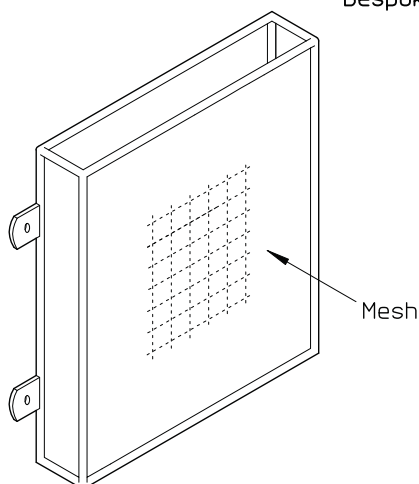

Standards Applicable

General Steelwork:

BS 1449:1991, BS 1387:1985
BS EN 10025:1993

Structural Steelwork:

BS EN 10210-1:1994
BS EN 10210-2:1997

Hot Dipped Galvanized:

BS EN ISO 1461:2009

Welding Procedures:

Comply with BS EN 1011-2:2001

Fasteners:

Grade 8.8 BS 3692:2001
BS 4190:2001 DIN931, DIN934

Design Wind Loading:

In accordance with CP3 chapter
V Pt 2 & BS 6399 Pt 2:1997

Paint finishes:

BS 4800 & RAL colour range





All WEC products are subject to ongoing development. Therefore, we reserve the right to make technical modifications without notice.

BRITANNIA HOUSE, JUNCTION STREET, DARWEN, LANCASHIRE, BB3 2RB. TEL: (01254) 700200. FAX: (01254) 873637. E-MAIL: all@wec.uk.net

SDA450 450 Swept Dome Adaptor
SDAL900 900 Lg.


SDA2 450 450 Twin Swept Dome Adaptor
SDAL2 900 900 Lg.

A range of decorative versions for all products are available

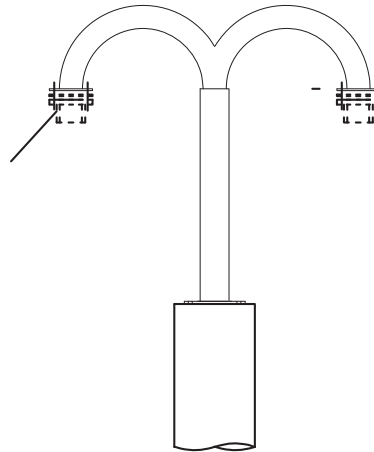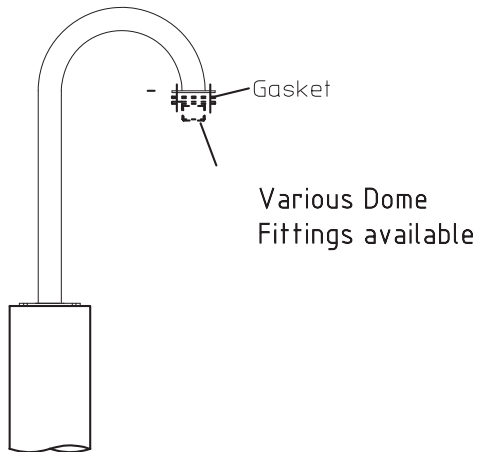


External dome brackets are finished with a standard flange.
Many other fitting types adaptors are available upon request.


SNAP
Swan Neck Adaptor Pole

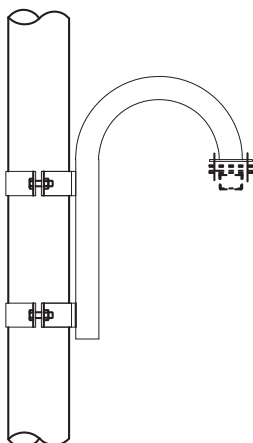

SNAC
Swan Neck Adaptor Corner



SNAW
Swan Neck Adaptor Wall



Standards Applicable

General Steelwork:
BS 1449:1991, BS 1387:1985
BS EN 10025:1993

Structural Steelwork:
BS EN 10210-1:1994
BS EN 10210-2:1997

Hot Dipped Galvanized:
BS EN ISO 1461:2009

Welding Procedures:
Comply with BS EN 1011-2:2001

Fasteners:
Grade 8.8 BS 3692:2001
BS 4190:2001 DIN931, DIN934


Design Wind Loading:
In accordance with CP3 chapter V Pt 2 & BS 6399 Pt 2:1997

Paint finishes:
BS 4800 & RAL colour range

Corner, Wall & Pole mount brackets are available

GCDM


Geordie Corner Dome Mount

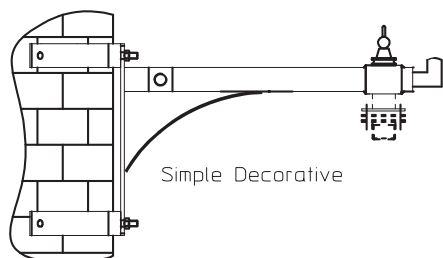

Simple Decorative

GWDM


Geordie Wall Dome Mount

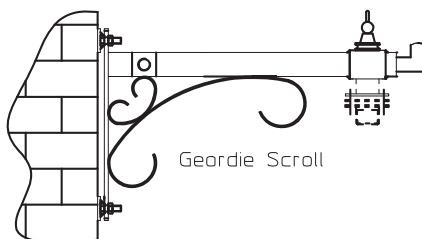

Geordie Scroll

GPDM(state pole diam)


Geordie Pole Dome Mount

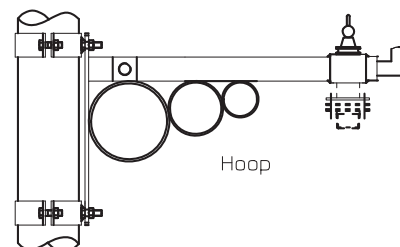

Hoop



GTPM

Geordie Top Pole Mount



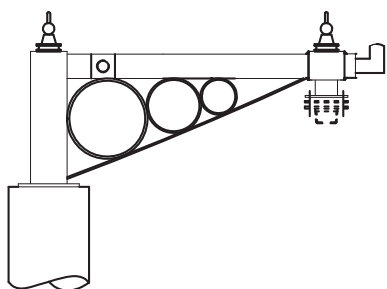


GTDM

Geordie Twin Dome Mount

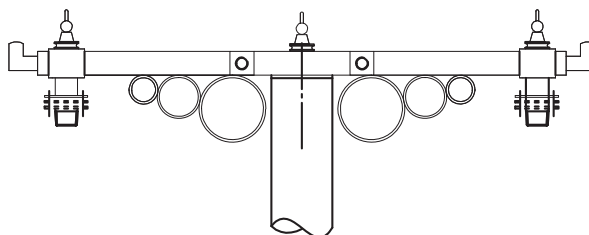

bespoke styles made to order

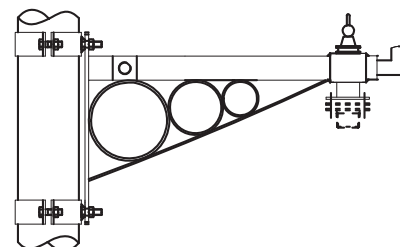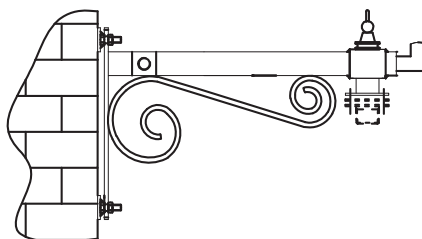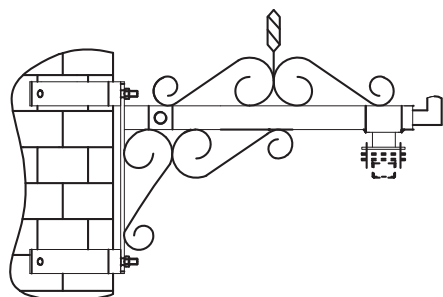

Standards Applicable

General Steelwork:

BS 1449:1991, BS 1387:1985
BS EN 10025:1993

Structural Steelwork:

BS EN 10210-1:1994
BS EN 10210-2:1997

Hot Dipped Galvanized:

BS EN ISO 1461:2009

Welding Procedures:

Comply with BS EN 1011-2:2001

Fasteners:

Grade 8.8 BS 3692:2001
BS 4190:2001 DIN931, DIN934

Design Wind Loading:


In accordance with CP3 chapter
V Pt 2 & BS 6399 Pt 2:1997

Paint finishes:


BS 4800 & RAL colour range

BWDM 600 Lg. wall mount - economy spec
BWDMX 1000 Lg.

BCDM 600 Lg. corner mount - economy spec
BCDMX 1000 Lg.

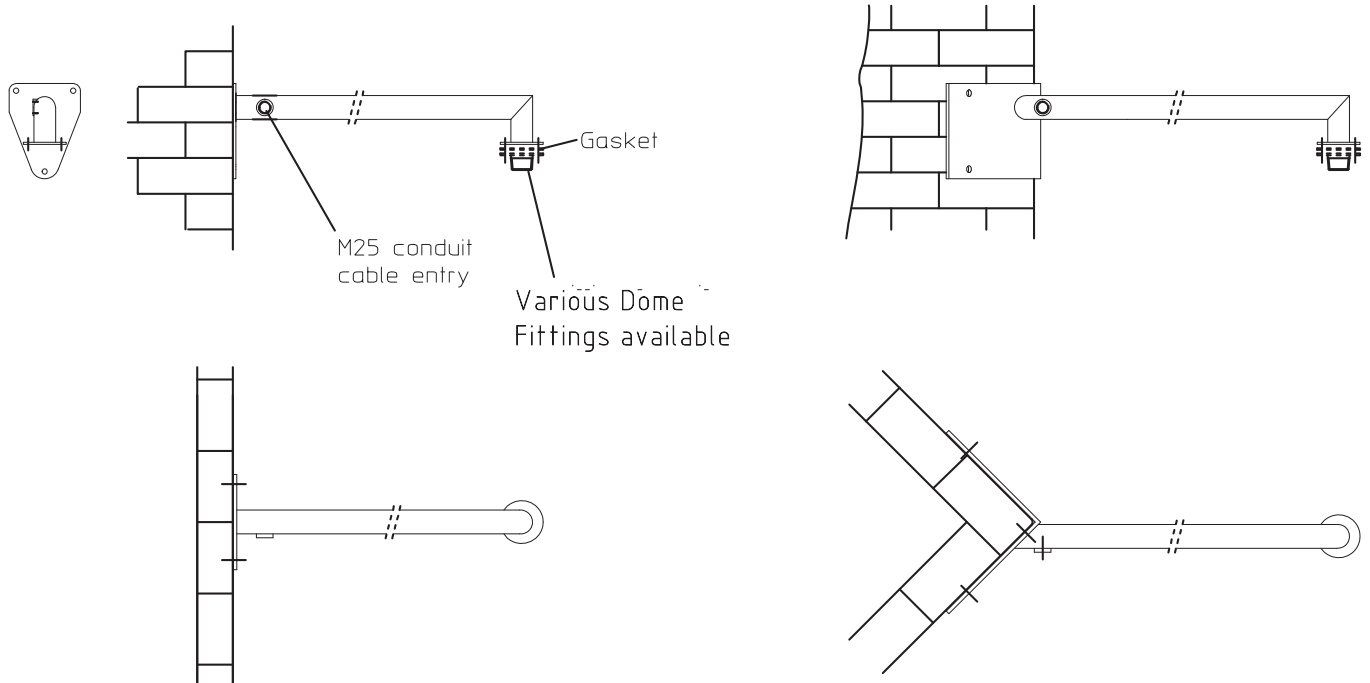

BPDM 600 Lg. Pole clamp - economy spec
BPDMX 1000 Lg.

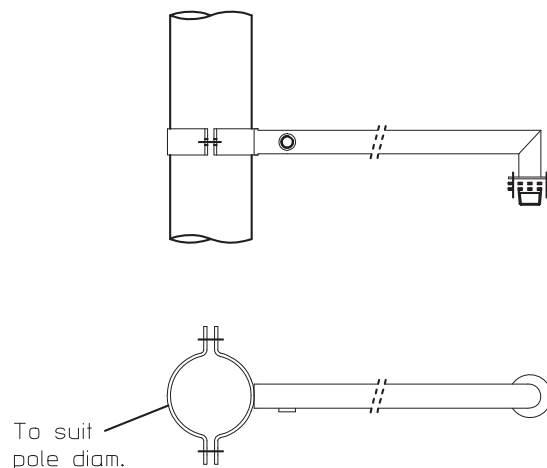

Standards Applicable


General Steelwork:
BS 1449:1991, BS 1387:1985
BS EN 10025:1993

Structural Steelwork:
BS EN 10210-1:1994
BS EN 10210-2:1997
Hot Dipped Galvanized:
BS EN ISO 1461:2009

Welding Procedures:
Comply with BS EN 1011-2:2001
Fasteners:
Grade 8.8 BS 3692:2001
BS 4190:2001 DIN931, DIN934


Design Wind Loading:
In accordance with CP3 chapter
V Pt 2 & BS 6399 Pt 2:1997
Paint finishes:
BS 4800 & RAL colour range

Parapet Wall Mount Swing Arm

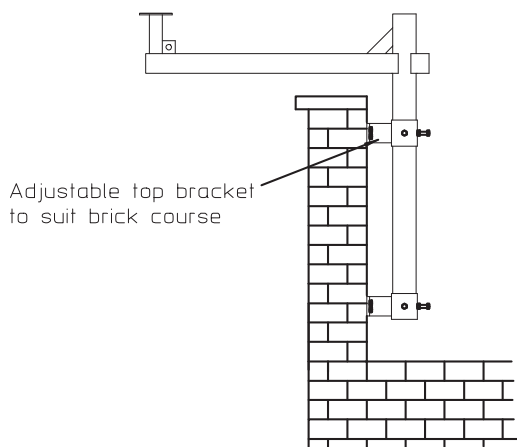


Adjustable top bracket to suit brick course

Internal & External corner mounts available



Rotates inboard to give safe access for camera servicing.


Free Standing Swing Arm

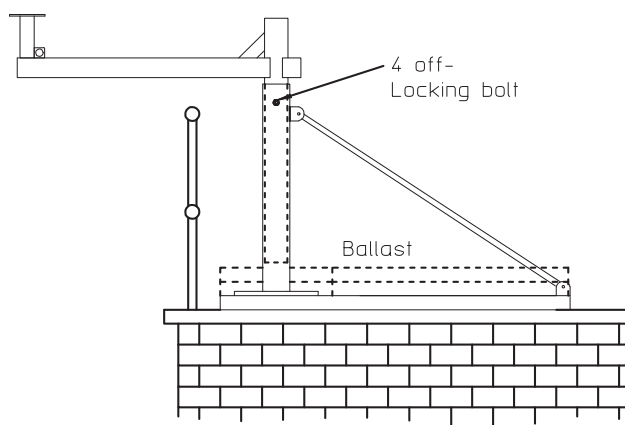

4 off-
Locking bolt


Ballast

Ballast dependant upon arm length, post height and location.

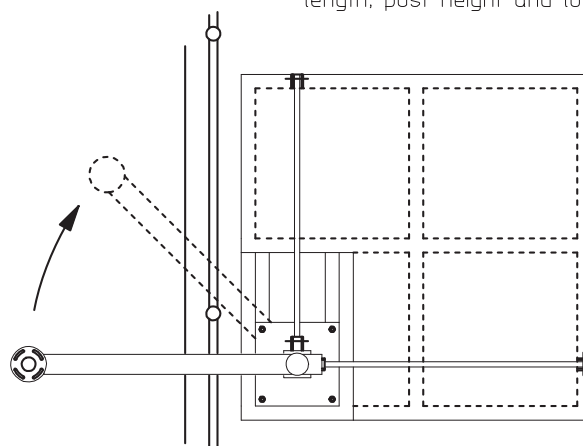

Rotates inboard to give safe access for camera servicing.

Traversing Camera Boom

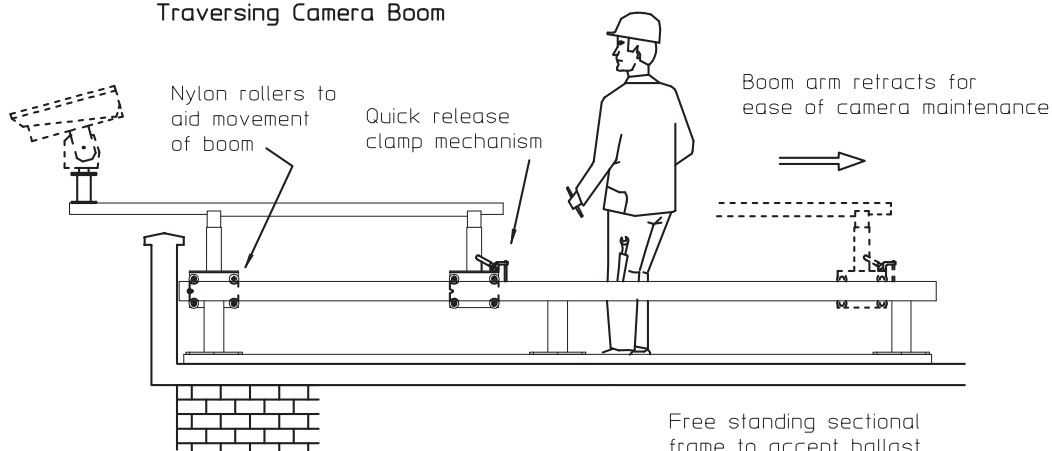

Nylon rollers to aid movement of boom

Quick release clamp mechanism

Boom arm retracts for ease of camera maintenance

Free standing sectional frame to accept ballast

Standards Applicable

General Steelwork:

BS 1449:1991, BS 1387:1985
BS EN 10025:1993

Structural Steelwork:

BS EN 10210-1:1994
BS EN 10210-2:1997

Hot Dipped Galvanized:

BS EN ISO 1461:2009

Welding Procedures:

Comply with BS EN 1011-2:2001

Fasteners:

Grade 8.8 BS 3692:2001
BS 4190:2001 DIN931, DIN934

Design Wind Loading:

In accordance with CP3 chapter V Pt 2 & BS 6399 Pt 2:1997


Paint finishes:

BS 4800 & RAL colour range


All WEC products are subject to ongoing development. Therefore, we reserve the right to make technical modifications without notice.

BRITANNIA HOUSE, JUNCTION STREET, DARWEN, LANCASHIRE, BB3 2RB. TEL: (01254) 700200. FAX: (01254) 873637. E-MAIL: all@wec.uk.net

All dimensions in mm unless otherwise stated

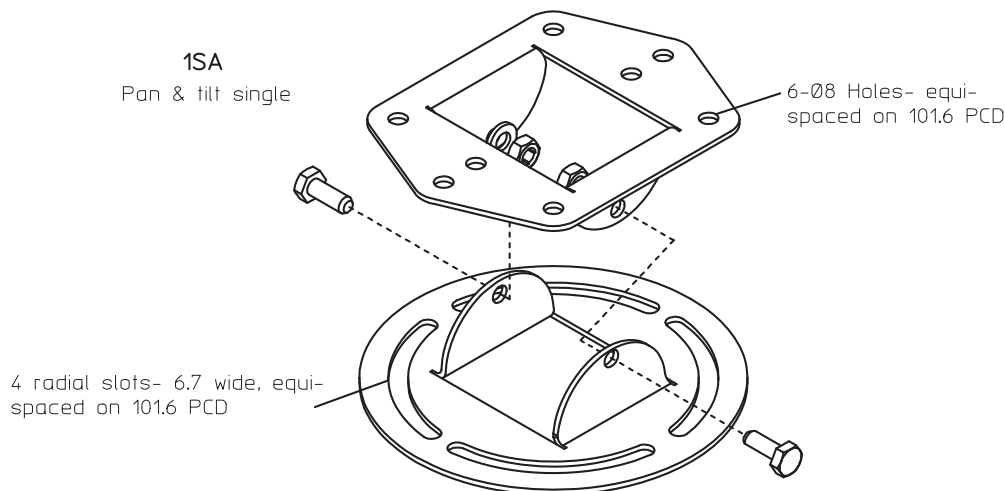


2SA
Twin Static Adaptor

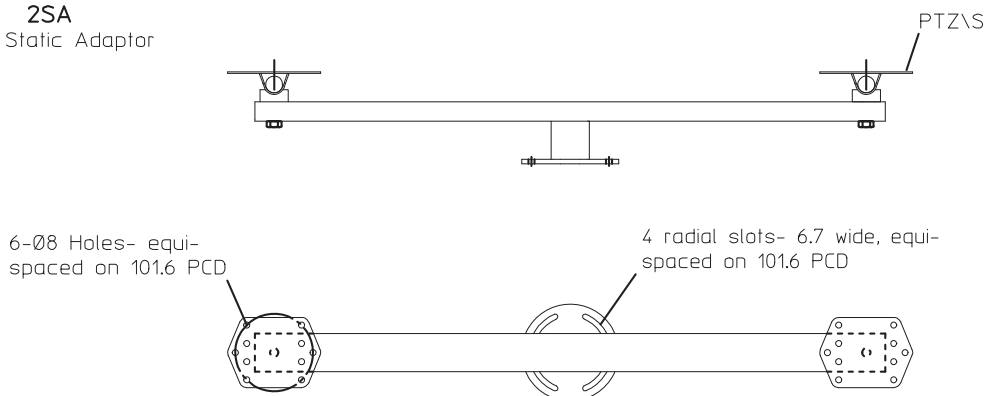

3SA
Triple Static Adaptor

Also available in a "3-in-line" version

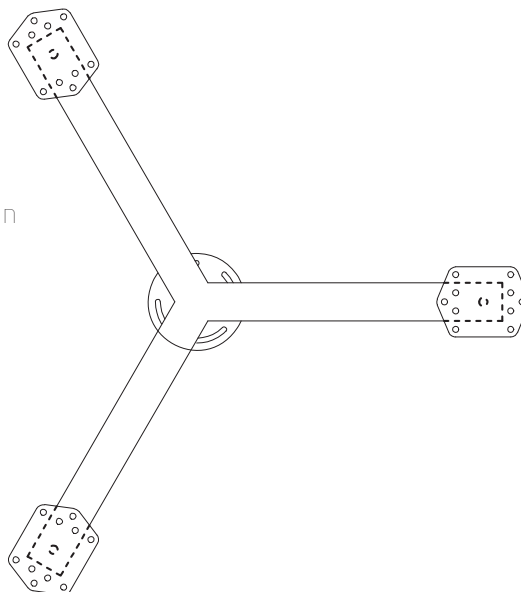

Standards Applicable

General Steelwork:

BS 1449:1991, BS 1387:1985
BS EN 10025:1993

Structural Steelwork:

BS EN 10210-1:1994
BS EN 10210-2:1997

Hot Dipped Galvanized:

BS EN ISO 1461:2009

Welding Procedures:

Comply with BS EN 1011-2:2001

Fasteners:

Grade 8.8 BS 3692:2001
BS 4190:2001 DIN931, DIN934

Design Wind Loading:



In accordance with CP3 chapter
V Pt 2 & BS 6399 Pt 2:1997

Paint finishes:






BS 4800 & RAL colour range

All WEC products are subject to ongoing development. Therefore, we reserve the right to make technical modifications without notice.
BRITANNIA HOUSE, JUNCTION STREET, DARWEN, LANCASHIRE, BB3 2RB. TEL: (01254) 700200. FAX: (01254) 873637. E-MAIL: all@wec.uk.net





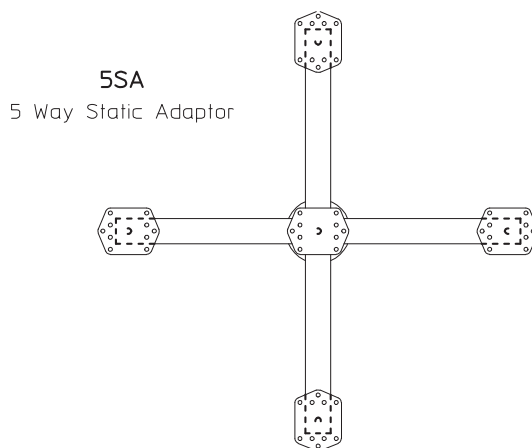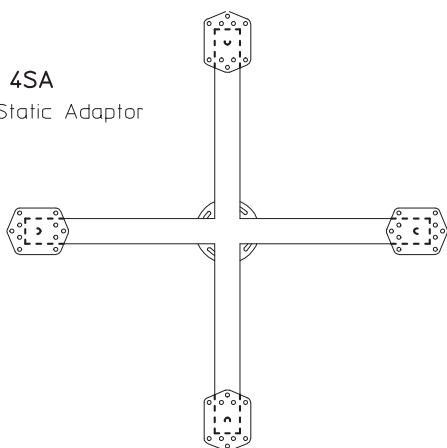

Also available in a "4-in-line" version

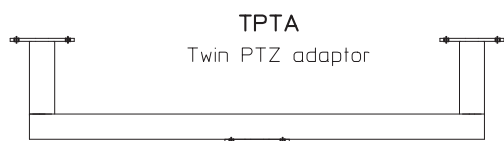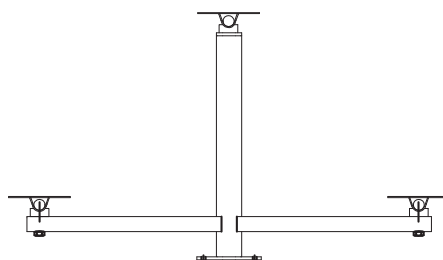

PT1/S2
1 PTZ & 2 static adaptors

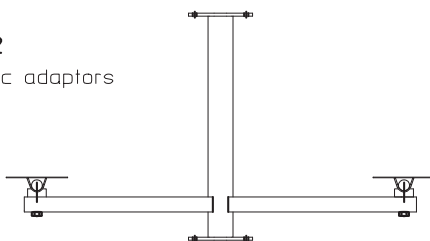

All dimensions in mm unless otherwise stated

Standards Applicable

General Steelwork:
BS 1449:1991, BS 1387:1985
BS EN 10025:1993

Structural Steelwork:
BS EN 10210-1:1994
BS EN 10210-2:1997

Hot Dipped Galvanized:
BS EN ISO 1461:2009

Welding Procedures:
Comply with BS EN 1011-2:2001

Fasteners:
Grade 8.8 BS 3692:2001
BS 4190:2001 DIN931, DIN934


Design Wind Loading:
In accordance with CP3 chapter
V Pt 2 & BS 6399 Pt 2:1997

Paint finishes:
BS 4800 & RAL colour range

All WEC products are subject to ongoing development. Therefore, we reserve the right to make technical modifications without notice.


BRITANNIA HOUSE, JUNCTION STREET, DARWEN, LANCASHIRE, BB3 2RB. TEL: (01254) 700200. FAX: (01254) 873637. E-MAIL: all@wec.uk.net

Clamp Brackets to suit Redwall Detectors

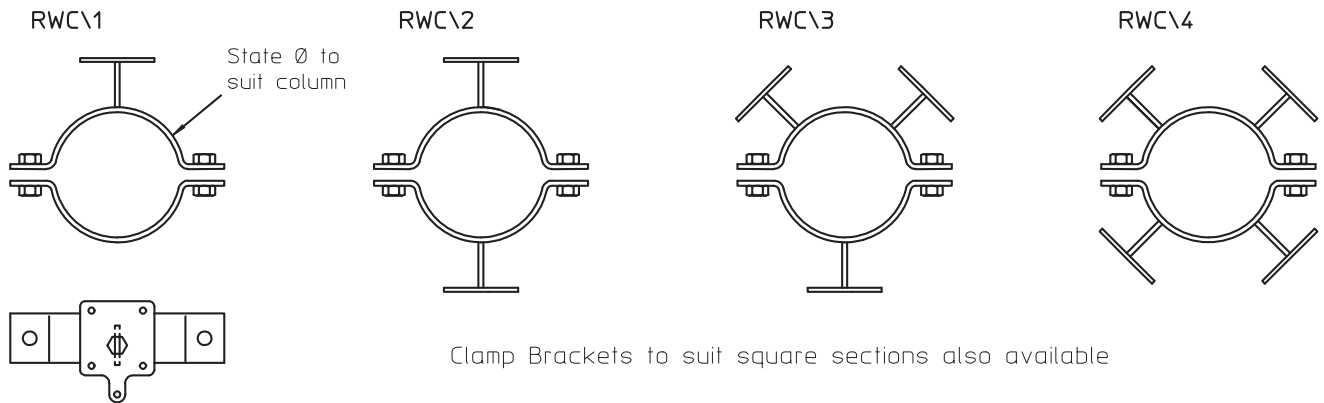


UPCA

Universal pole clamp adaptor

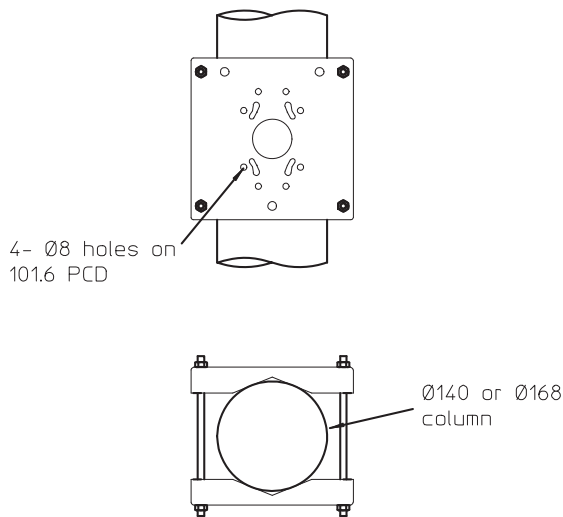

LRC

Clamp on ladder support

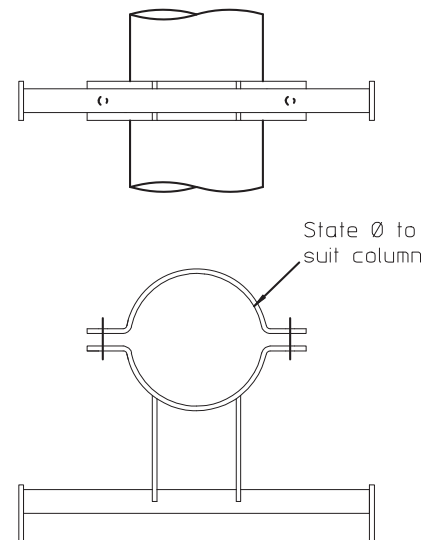


Ref.	Lg.	4 radial slots- 6.7 wide, equi-spaced on 101.6 PCD	Ø127
CS150	150		
CS225	225		
CS300	300		
CS450	450		
CS600	600		
CS1000	1000		
CS1500	1500		
CS2000	2000		

CS150

CS225

CS300

CS450



Standards Applicable

General Steelwork:

BS 1449:1991, BS 1387:1985
BS EN 10025:1993

Structural Steelwork:

BS EN 10210-1:1994
BS EN 10210-2:1997

Hot Dipped Galvanized:

BS EN ISO 1461:2009

Welding Procedures:

Comply with BS EN 1011-2:2001

Fasteners:

Grade 8.8 BS 3692:2001
BS 4190:2001 DIN931, DIN934

Design Wind Loading:



In accordance with CP3 chapter V Pt 2 & BS 6399 Pt 2:1997

Paint finishes:



BS 4800 & RAL colour range

All WEC products are subject to ongoing development. Therefore, we reserve the right to make technical modifications without notice.
BRITANNIA HOUSE, JUNCTION STREET, DARWEN, LANCASHIRE, BB3 2RB. TEL: (01254) 700200. FAX: (01254) 873637. E-MAIL: all@wec.uk.net


TBC Clamp on Telemetry bracket

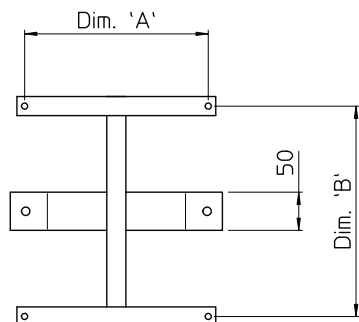

	Dim A	Dim B
ZR4 WBX	255	534
ZR3 WBX	240	180
ZR4 MINI	254	254
ZR3 MINI	254	254
7361 WBX	254	254
7362 WBX	254	254

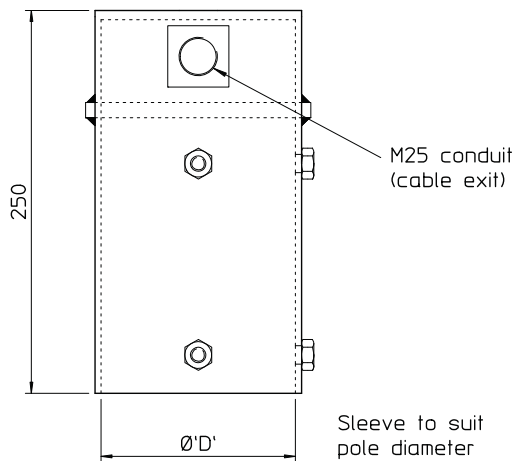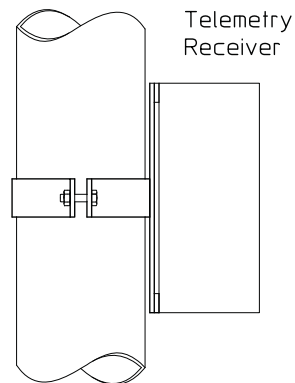

Top Hat Adaptor TPMA\ ___ (Pole diam)

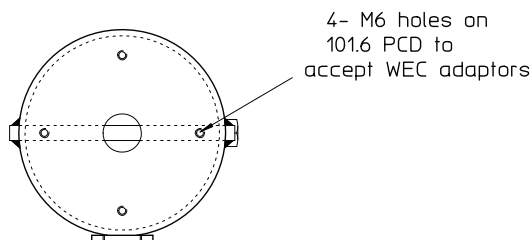

Standards Applicable

General Steelwork:
BS 1449:1991, BS 1387:1985
BS EN 10025:1993

Structural Steelwork:
BS EN 10210-1:1994
BS EN 10210-2:1997

Hot Dipped Galvanized:
BS EN ISO 1461:2009

Welding Procedures:
Comply with BS EN 1011-2:2001

Fasteners:
Grade 8.8 BS 3692:2001
BS 4190:2001 DIN931, DIN934

Design Wind Loading:
In accordance with CP3 chapter
V Pt 2 & BS 6399 Pt 2:1997

Paint finishes:
BS 4800 & RAL colour range

All WEC products are subject to ongoing development. Therefore, we reserve the right to make technical modifications without notice.

BRITANNIA HOUSE, JUNCTION STREET, DARWEN, LANCASHIRE, BB3 2RB. TEL: (01254) 700200. FAX: (01254) 873637. E-MAIL: all@wec.uk.net

Accessories



Anticlimb Brackets



PCA Brackets



3SA Bracket



UPCA Brackets




Anti Vandal Cages



HDPTW Bracket

Roots

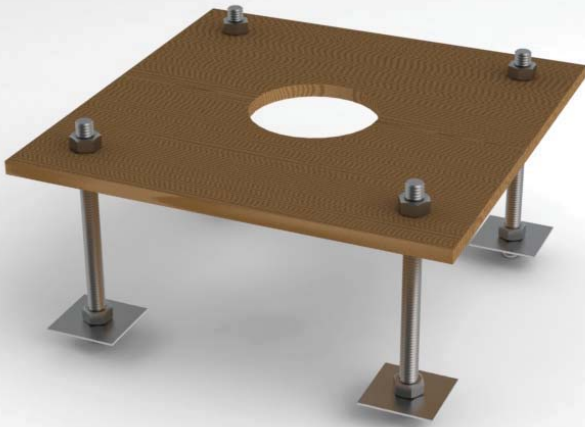

TC Root



FM Root



ST Root



ST / AF



WD Root



WD / AF



FMPKT
TOPKT
state type

FMTDB
FMSDB
state type



Gallery



Custom Stainless Steel Reader Post



Single Height Access Post



Custom Stainless Steel Intercom Post



Custom Information Post

Gallery**TC6TO with double arms bracket****ST6 Lattice Tower****CB6****TC8TO**

Gallery



FMT8



CB8TP



TP4T



TP5S

TC8



Sales Direct: +44 (0) 1254 700200
Fax: +44 (0) 1254 873637 Website: www.wec.uk.net Email: all@wec.uk.net

Gallery



Anti-Congestion Cantilever Pole



Anti-Congestion Cantilever Pole



TP5S



FMT4

Gallery**TC6TO****WD12 Heavy Duty****FMV8 Turner****Wall Mounted Swing Bracket**

Gallery



1. The Contents of this Contract.

- In this contract 'the Company' means WEC Group Limited. The 'Goods' means the goods or services sold or supplied by the Company to the Customer under this Contract. 'This Contract' means a Contract between the Customer and the Company incorporating these conditions.
- This Contract governs the sale of Goods by the Company to the exclusion of all other representations, statements, understanding, negotiations, proposals or agreements.
- Where the Customer submits its own order form, these terms shall prevail if they conflict with the terms in that form, even if that form includes a condition similar to this one.
- No employee of the Company or its agents has authority to make any warranty, statement or promise concerning the goods, except in writing signed by a duly authorised employee of the Company.
- The Customer's order shall be subject to acceptance by the Company.
- Orders are accepted and estimates of delivery given conditionally on the Company being able to secure the necessary labour or material and without responsibility for delays or non-fulfilment arising through risk and uncertainties of manufacture, strikes, accidents, force majeure or otherwise however caused.
- All drawings, descriptive and forwarding specifications, particular of weights and dimensions are approximate only and not binding and illustrations contained in catalogues, sales literature and other advertising material are for the purpose of general description only and none of these shall form part of this Contract.

2. Prices

- We reserve the right to invoice at the price ruling at date of despatch. All prices, unless otherwise stated, are exclusive of value added tax or any other duty which is or may be levied or charged in the UK or in the country of destination. Any such taxes, duties or charges shall be paid by the Customer.
- Unless otherwise specified, packing cases and pallets will be charged extra, but will be credited in full on return carriage paid and in one month by the Customer. Export packing cases are not returnable.
- The prices quoted are subject to any increase in the cost of labour or material between the date of quotation and despatch of Goods from our works and do not include installation costs.

3. Property of Goods

- Property of Goods delivered by the Company shall not pass to the Customer until payment is made in full. In the case of default in payment, the Company shall be granted access rights in order to repossess the Goods. At all times before payment in full, the Goods shall stand in the Customer's books in the name of the Company and the Customer shall take appropriate steps to notify third parties of the Company's interest in the Goods and
- In the event of threatened seizure of the Goods or appointment of a receiver or liquidator, or any other event entitling the Company to terminate this Contract under paragraph 8, the Customer shall immediately notify the Company. The Company shall be entitled to enter the Company's premises and repossess the goods.
- If the Customer delivers the Goods to a third party, before payment has been made in full to the Company, the Customer shall hold all sums received for such Goods as trustee for the Company and shall remit them to the Company on receipt.
- Risk in the Goods shall pass on delivery.

4. Delivery

- Delivery shall be 'ex-works' unless otherwise agreed. If the Contract includes delivery by the Company or its nominated contractor, the Customer is responsible for giving the Company clear and accurate information as to the place of delivery.
- Time shall not be of the essence in respect of delivery. If the Goods are to be delivered by a date specified by the Customer or the Company, such date is to be treated as an estimate only. The Company does not guarantee that the Goods will be delivered by such date or accept liability or any consequential losses for failure to meet the date.

5. Settlement Terms

- Home Sales: Where credit facilities exist, accounts are due for payment within 30 days of the end of the month of delivery. Where special discount terms are quoted, the terms must be strictly adhered to otherwise the account will be charged nett. The Customer shall, unless agreed in writing, pay all sums to the Company under the Contract prior to delivery in cash or cleared cheque in pounds sterling. If for any reason the Company does not receive unconditional payment in full, whether under any terms of credit facilities or otherwise, within 30 days of month end delivery, then the Company may charge daily interest on such payments at a rate equal to 4% per annum above the Based lending rate of the National Westminster Bank plc., with such interest to run from day to day to accrue before as well as after any judgement.
- Overseas and Export Sales: Special terms will be quoted for overseas deliveries.
- If we incur third party costs such as tracing, debt collection agency or seek to take legal proceedings to enforce our rights as a result of breach of this Contract, including but not limited to recovery of all sums due, the Customer will be liable to reimburse the Company such costs incurred on an indemnity basis.

6. Deliveries

- The Company does not accept responsibility for any damage, shortage or loss in transit unless:
 - Non-receipt of Goods is advised to the Company within 10 days from the date of the Company's advice/delivery note and
 - Any breakage, damage or shortage is advised to the Company and carriers within 3 days of receipt of goods, provided that the carrier's note is marked 'unexamined'.
- All sizes are approximate. Variations during the course of manufacture cannot be avoided and liability is not accepted for them. Where exact and detailed dimensions on standard products are required, then please contact our Technical Department for details.
- When Goods are offered and supplied to a Customer's design and specification, no guarantee is given or implied of their suitability for the purpose of which they are intended.
- In cases where fixings and holding down bolts are supplied, then it is the Customer's responsibility to ensure that the fabric being connected to is of suitable strength and quality to accept the fixings and equipment being connected to. It is the Customer's onus to ensure that the fixings are fitted in the correct manner and to the manufacturer's guidelines.
- If during a period of 12 months from delivery the Company is notified of a fault in the Goods which is due to faulty design, manufacturing or materials, the Company will replace or (at its option) repair the faulty part free of charge provided that:
 - The Goods have been properly kept, used and maintained in strict accordance with the manufacturer's or the Company's instructions, if any, and have not been modified.
 - The fault is not due to accidental or willful damage, interference with or maintenance of the Goods by persons other than the Company or its duly appointed agent.
 - If the Goods have been manufactured to the Customer's design, the fault is not due to faulty design by the Customer.
 - This guarantee does not cover wear and tear.
 - The Customer will be required to return the faulty Goods to the Company.

7. Limits of Liability

- Except where expressly contained in this Contract, all warranties, conditions, undertakings and representations, expressed or implied, statutory or otherwise, are excluded and the Company has no obligation, duty or liability in Contract, tort (including negligence or breach of statutory duty) or otherwise.
- In any event, the Company's liability arising for any reason in connection with the Contract shall be limited to the original invoice value of the Goods.
- In no circumstances will the Company be liable in Contract, tort (including negligence or breach of statutory duty) or otherwise for loss (whether direct or indirect) of profits, business or anticipated savings, or any indirect or consequential loss or damage whatsoever.
- The Company does not exclude or restrict liability for death or personal injury resulting from its own negligence.
- Each provision of this condition is to be construed as a separate limitation applying and surviving even if for any reason one or all of the said provisions is held unreasonable in any circumstances and shall remain in force notwithstanding termination of this Contract.

8. Termination

- The Company shall have the right forthwith to terminate this Contract and to claim for any resulting losses or expenses if:
 - The Customer commits a breach of this Contract and fails to remedy the breach within a reasonable time of written notice to do so.
 - The Customer commits any act of bankruptcy or compounds with its creditors, or a petition or receiving order in bankruptcy is presented or made against the Customer, or a petition for an administration order is presented (otherwise than for reconstruction or amalgamation), or a receiver or administrative receiver or any similar event occurs under the laws of the state where the Customer was incorporated.

9. Modification of Contract

- Should the Customer reduce quantities or modify specifications once an order has been placed with the Company, then the Customer shall have liability for all materials and labour costs up to the point of contract modification.

10. Force Majeure

- The Company shall not be liable in respect of any breach of this Contract due to any cause beyond its reasonable control including Act of God, inclement weather, flood, lightning or fire, industrial actions or lockouts, the act of omission of Government, highways authorities or other competent authority, war, military operation or riot, the act of omission of any part for whom the Company is not responsible.

11. Infringements

- The Customer shall indemnify the Company against all damages, penalties, costs and expenses arising out of any claim by any third party for any infringement or alleged infringement of any third party's industrial or intellectual property rights in any work carried out in accordance with the Customer's specifications.
- Copyright in all drawings or tracings prepared by the Company are the Company's property and copyright must be regarded as confidential. Such drawings and tracings must not be published or disclosed under any circumstances without the Company's permission in writing.

12. Applicable Law

- The Law of England shall be proper law of Contract.

Please complete all sections in BLOCK CAPITALS and return to WEC Group Limited with a copy of your letter heading

Company Details

Customer Name Company Reg. No

Trading Name (if different)

Address

..... Post Code

Tel No. Fax No

Registered Office (if different from above)

Post Code VAT No

Tel No. Fax

Type of Company (circle as appropriate)

Public Limited Company Limited Company Partnership Sole Trader

Parent Company Name

Name & Address of Directors / Partners / Sole Traders

1)

..... Post Code

2)

..... Post Code

3)

..... Post Code

Number of years trading Credit limit required (£ per month)

Approx annual turnover Total No. of staff

Number of outlets (please supply details under separate cover)

Do you require to give official order numbers? Yes / No Confirmed in writing? Yes / No

Contact name & telephone no. of person in charge of accounts payable

Bank Details

Banker Branch

Sort Code Account No

Account Name Bank Tel No

Trade References

Name Name

Address Address

Post Code Post Code

Tel No Tel No

Contact Contact

I/We have read your conditions of sale as set out and agree that they supercede any terms/conditions confirmed in our purchase order.


Signed Signed
(Authorised signatory) (Authorised signatory)

Print Name & Title Print Name & Title

Date Date

Account Approval Credit Limit Account Number

Thank you for completing this form - we will process it as quickly as we can, and look forward to your valued orders in the near future

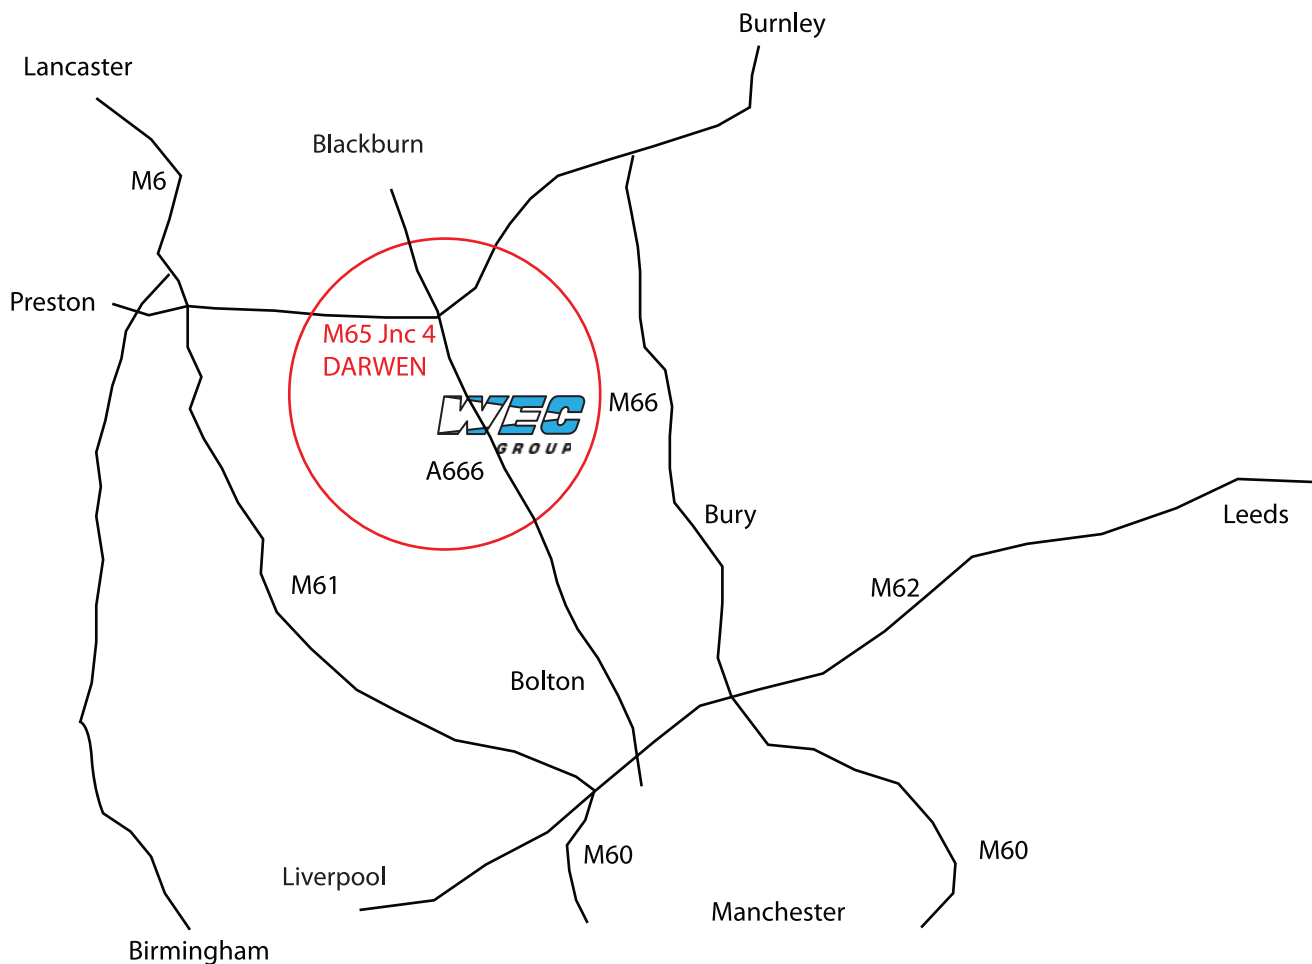

Directions

Leave M65 at Junction 4

Take the exit for Blackburn/Darwen off the roundabout

Move into the left hand lane and head towards Darwen/Bolton A666

Continue through Darwen centre and on past India Mill on your left

Junction Street Site


Take a left before the petrol station onto Cross Street

WEC is on your right

Spring Vale Road Site

Take a left after the petrol station onto Grimshaw Street

WEC is second road on your right

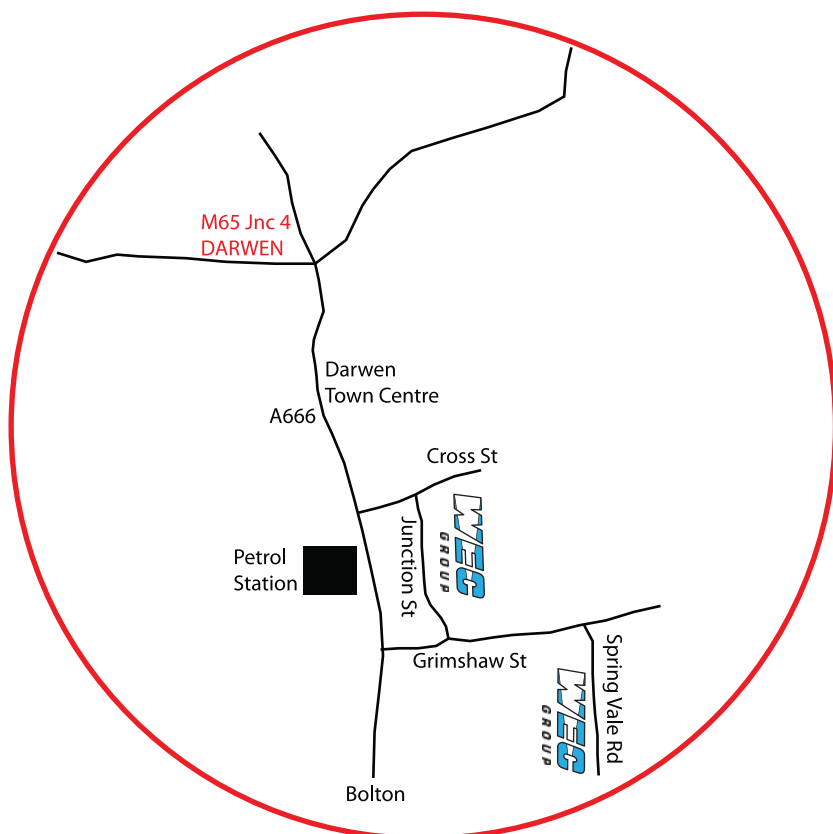



WEC
CCTV

Britannia House, Junction Street,
Darwen, Lancashire BB3 2RB.

Sales Direct: +44 (0) 1254 700200
General Enquiries: +44 (0) 1254 7737
Fax: +44 (0) 1254 873637
Website: www.wec.uk.net
Email: all@wec.uk.net

WEC CCTV is a trading division of WEC Group Ltd