


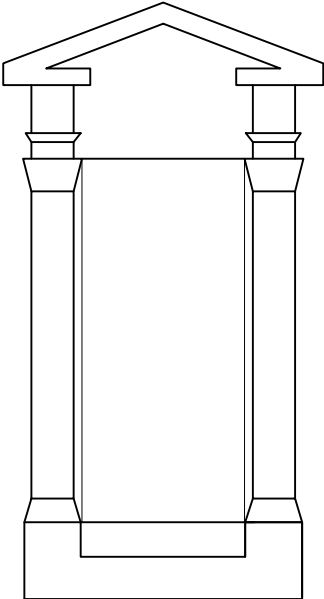
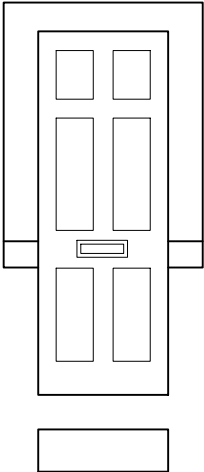
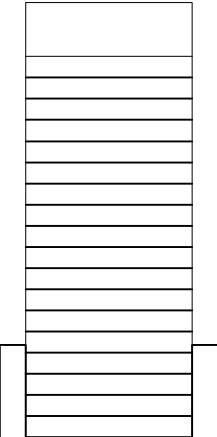
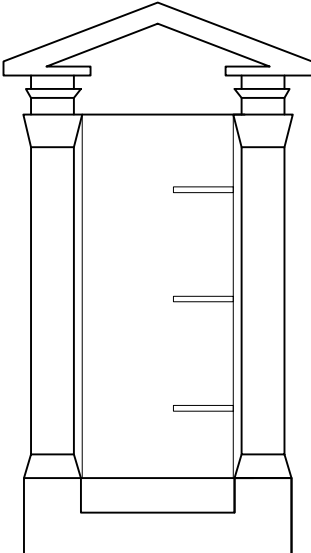
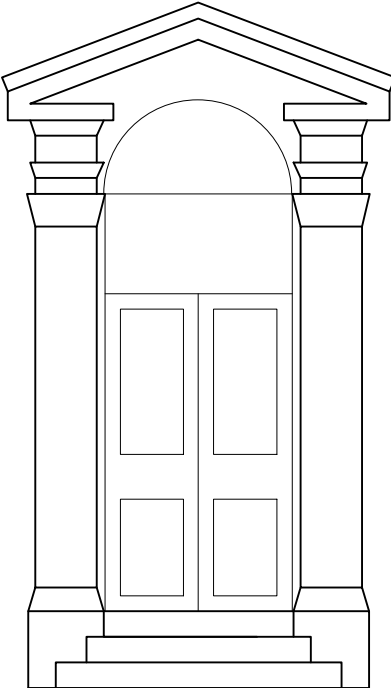



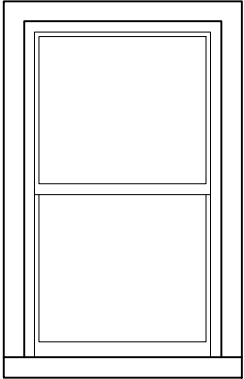










GROUND FLOOR
DOOR SCHEDULE

ELEMENT ID	GF D1 - SAP Issue 3	GF D2 - SAP Issue 4	GF D3 - SAP Issue 9	GF D4 - SAP Issue 11	GF D5 - SAP Issue 12	GF D6 - SAP Issue 14	GF D7 - SAP Issue 23	FF D1 - SAP Issue 42	SF D1 - SAP ISSUE 69
FLOOR LEVEL	Ground Floor	Ground Floor	Ground Floor	Ground Floor	Ground Floor	Ground Floor	Ground Floor	First Floor	Second Floor
WIDTH (APPROX)	2600	915	1075	860	250	1015	1240	875	0
HEIGHT (APPROX)	2800	2000	2400	2400	700	2400	2700	1925	1925
DESCRIPTION	Garage door	Fire Escape	4 Panel Door	6 Panel Door	Metal panels LL	4 Panel Door	4 Panel Door	Fire Escape	Fire Escape
DRAWING									
DILAPIDATION NOTES	Allow to overhaul existing roller shutter, replace locks with new, and prepare for redecorations.	Remove door and frame replace frame with new weatherhood and side panel. Replace door with new solid core ext quality door with new ironmongery. Install Galvanised security sheet to face of door on completion.	Door boarded up, allow PC sum of £500.00, scope of works to be confirmed on site	Existing door retained. Install new threshold bar and new letterbox. Overhaul door generally and check all ironmongery operational.	Condition of door behind shutter not known allow PC sum of £500.00, scope of works to be confirmed on site. Metal plate works LL as noted on the drwg.	Existing door retained. Overhaul door generally and check all ironmongery operational.	Existing door retained. Overhaul door generally and check all ironmongery operational. Fit draft / vermin strip to back of doors.	Extg door retained. Overhaul door generally & check all ironmongery operational. Fit weatherbar to door. Silicone seal around door frame and weatherproof.	Extg door retained. Overhaul door generally & check all ironmongery operational. Fit weatherbar to door. Silicone seal around door frame and weatherproof.

GROUND FLOOR
WINDOW SCHEDULE

ELEMENT ID	GF W1 - SAP Issue 7	GF W2 - SAP Issue 29	GF W3 - SAP Issue 28	GF W4 - SAP Issue 27	GF W5 - SAP Issue 26	GF W6 - SAP Issue 25	GF W7 - SAP Issue 24	GF W8 - SAP Issue 30	GF W9 - SAP Issue 31	GF W10 - SAP Issue 32	GF W11 - SAP Issue 33
FLOOR LEVEL	Ground Floor	Ground Floor	Ground Floor	Ground Floor	Ground Floor	Ground Floor	Ground Floor	Ground Floor	Ground Floor	Ground Floor	Ground Floor
WIDTH (APPROX)	1070	890	610	900	900	900	975	1050	1050	1050	800
HEIGHT (APPROX)	1850	2720	2520	2000	2000	2050	2050	2050	2050	2050	2490
DESCRIPTION	Fixed	Sash	Sash	Casement	Sash	Sash	Sash	Sash	Sash	Sash	Sash
DRAWING											
DILAPIDATION NOTES	No repair works to existing window.	Retain as existing, to be prepped and painted.	Retain as existing, to be prepped and painted.	Remove gallows brackets / canopy over window. Retain as existing, repair, to be prepped and painted.	Retain as existing, repair, to be prepped and painted.	Retain as existing, repair, to be prepped and painted.	Retain as existing, to be prepped and painted.	Retain as existing, to be prepped and painted.	Retain as existing, to be prepped and painted.	Retain as existing, to be prepped and painted.	Retain as existing, to be prepped and painted.



B	Scope of works update	JH	06-05-25
A	Scope of works update	NH	28-01-25
Rev	Description	By	Date

INVENTIVE DESIGN ASSOCIATES
ARCHITECTURE & INTERIOR DESIGN

57 Station Road, Cheadle Hulme
Stockport, Greater Manchester SK8 7AA
Company Reg No: 9251414

TRUST PUBS
The Brunswick
97 Piccadilly, Manchester M1 2DB
EXISTING GF & DOOR SCHEDULE

DRAWN	JW	DATE	28-01-25	DRAWING NO.	
SCALE	1:50@A2	REV.	B		22108-701A