



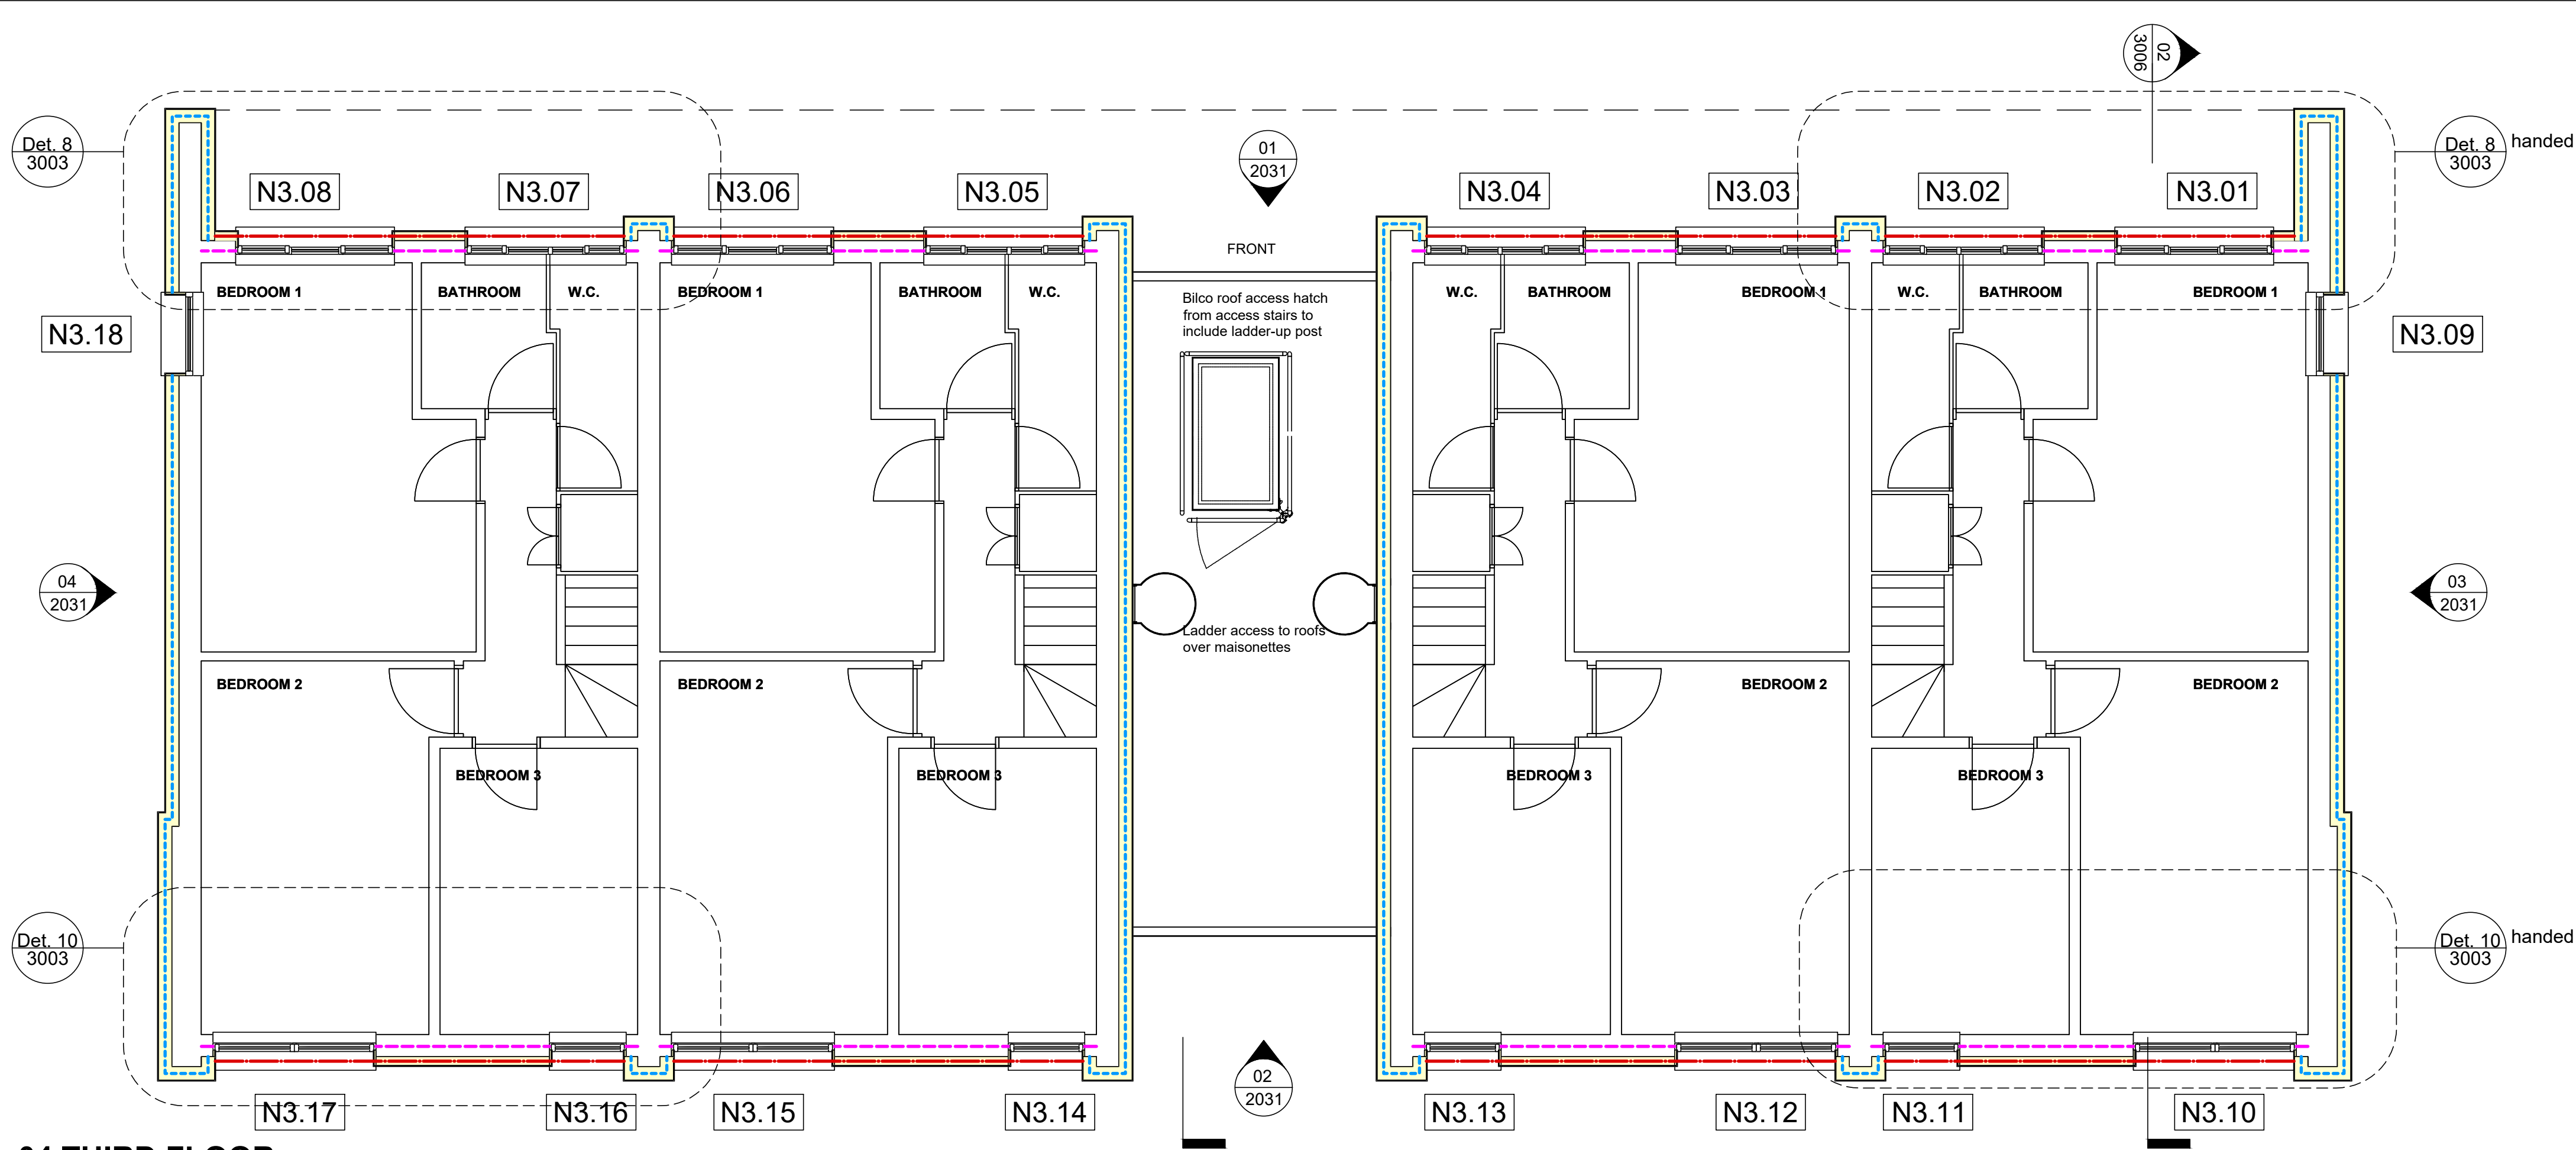

04 THIRD FLOOR

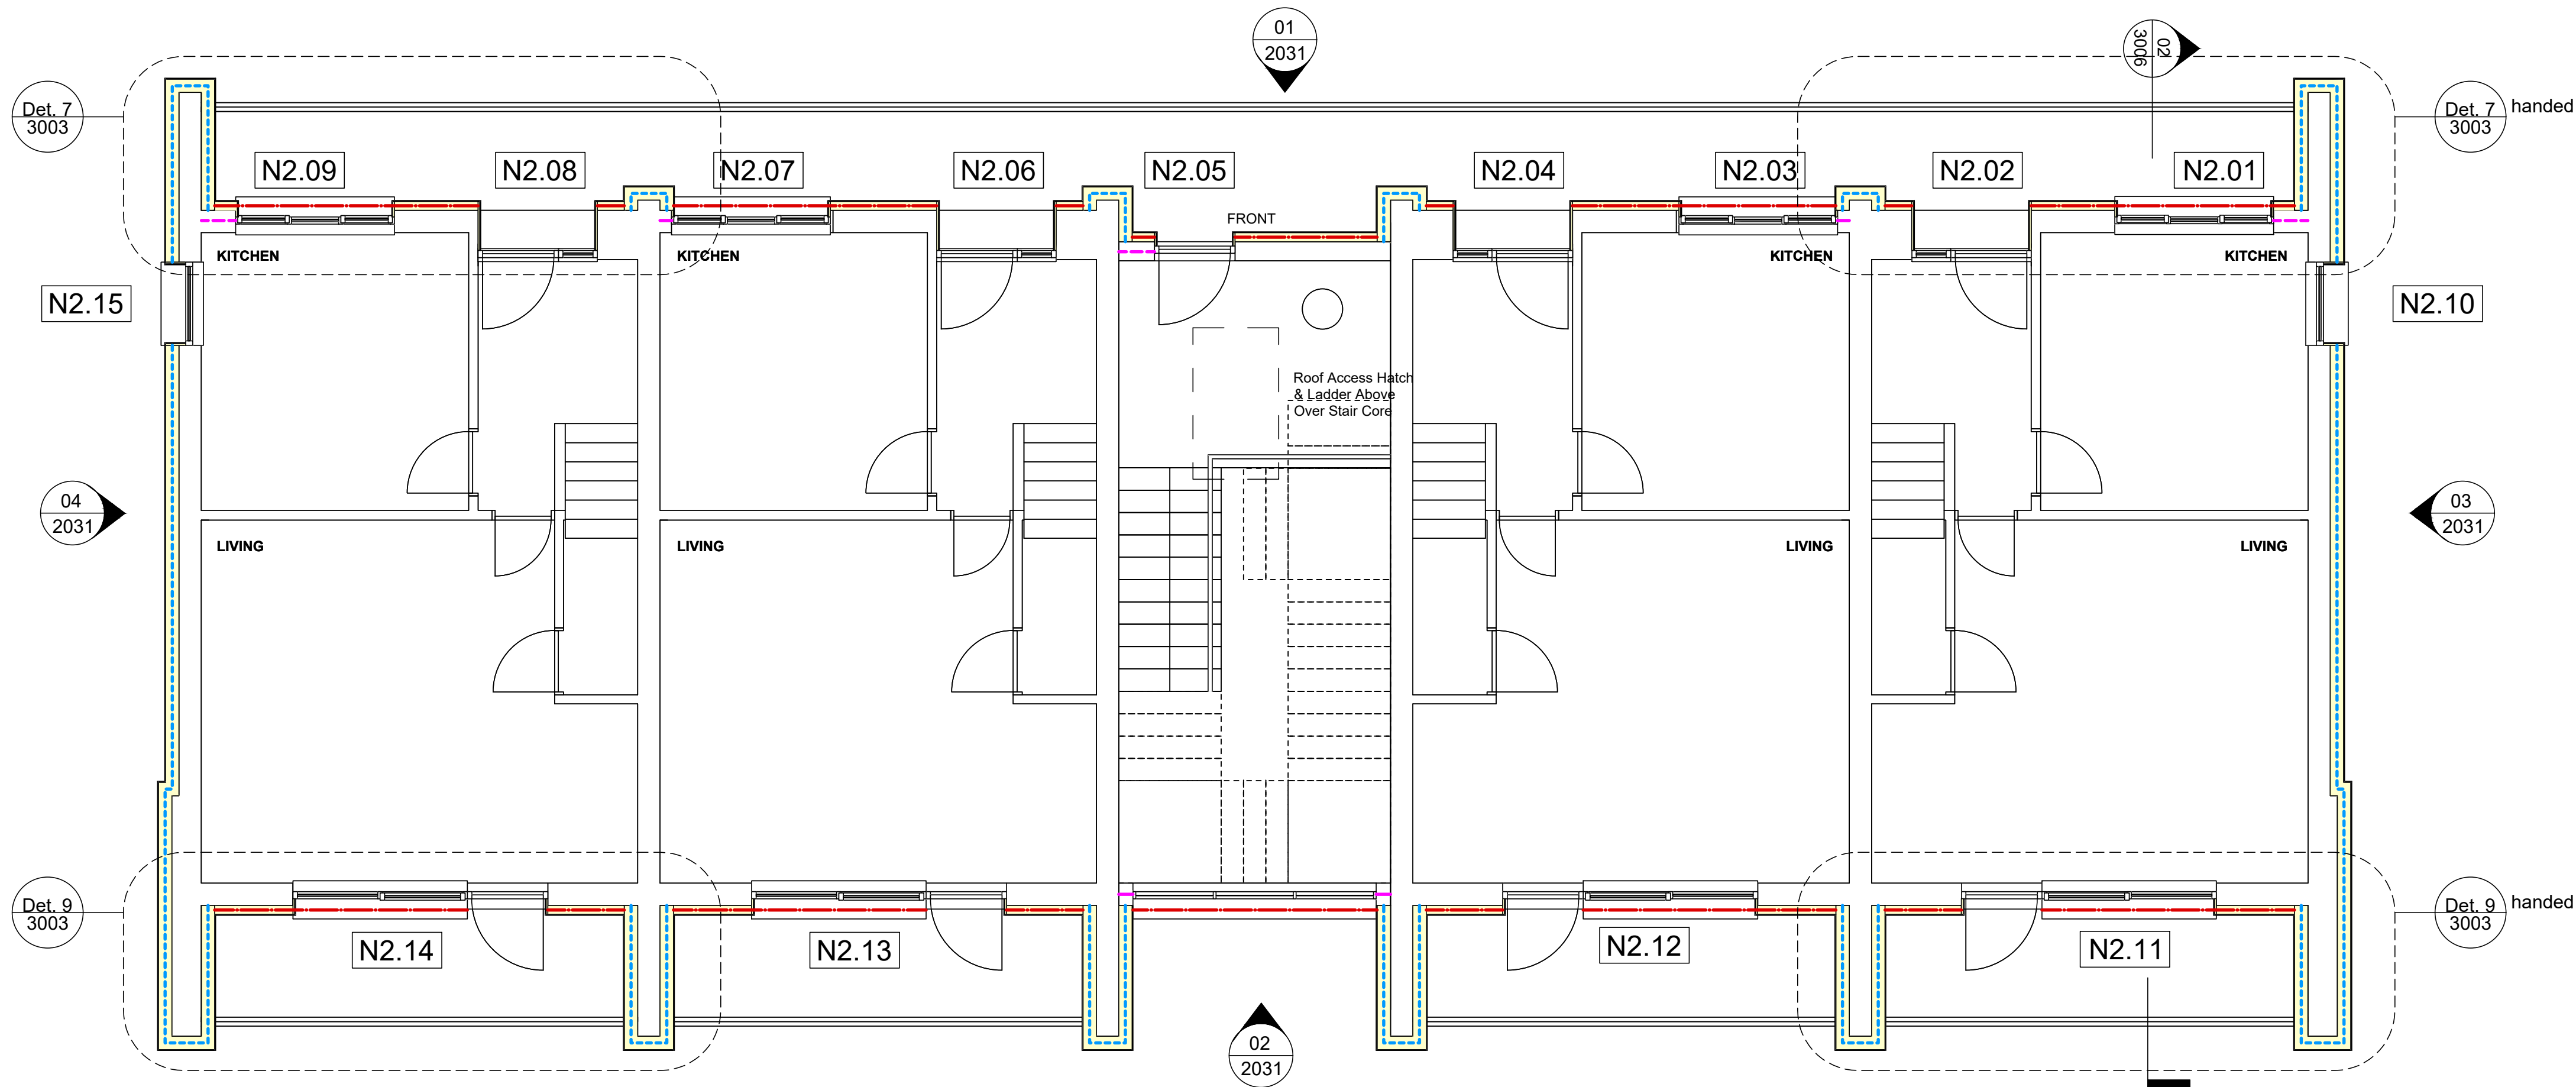

03 SECOND FLOOR

- New silicone render/adhered brick slip finish (refer to elevations for exact locations) over new 150mm mineral fibre slab insulation, fixed to existing masonry backing wall. As Wetherby Building Systems specification ref. PS_21-01642MR - (150mm Stone Wool & 14mm Brick Slips - Masonry) and PS_21-01642MR - (150mm Stone Wool & HECK Silicone K 1.5mm - Masonry) both dated May 2024, or equivalent alternative subject to written agreement
- New silicone render/adhered brick slip finish (refer to elevations for exact locations) over new 100mm mineral fibre slab insulation, fixed to existing masonry backing wall (vertical hanging tile and support removed as necessary). As Wetherby Building Systems specification ref. PS_21-01642MR - (100mm Stone Wool & 14mm Brick Slips - Masonry) and PS_21-01642MR - (100mm Stone Wool & HECK Silicone K 1.5mm - Masonry) both dated May 2024, or equivalent alternative subject to written agreement
- New silicone render finish (refer to elevations for exact locations) over new 100mm mineral fibre slab insulation, fixed to new SFS, comprising 200mm galvanised steel framing system with 200mm mineral fibre quilt to cavity, faced internally with 1 layer wallboard and externally with weather resistant sheathing board and breather membrane. As Wetherby Building Systems specification ref. PS_21-01642MR - (100mm Stone Wool & 14mm Brick Slips - SFS) and PS_21-01642MR - (100mm Stone Wool & HECK Silicone K 1.5mm - SFS) both dated May 2024 or equivalent alternative subject to written agreement

NOTE: ALL KITCHENS /BATHROOMS TO BE REFURBISHED