

# Our ESP Range




## ESP 4500

- ESP 1500E which can handle up to 0.7m<sup>3</sup>/sec of air flow
- ESP 3000E which can handle up to 1.4m<sup>3</sup>/sec of air flow
- ESP 4500E which can handle up to 2.1m<sup>3</sup>/sec of air flow
- ESP 6000E which can handle up to 2.8m<sup>3</sup>/sec of air flow


Our ESP's have been specifically designed for kitchen extract systems; they have integral sumps to collect the oil, grease and smoke particles filtered out of the exhaust. This not only simplifies servicing but eradicates potentially dangerous spillage from the bottom of the units and greatly cuts down on build-ups of grease within the ducting.

The ionisation voltage has been designed to run at a negative potential which enhances the ionisation of particles and also produces more ozone which is helpful in reducing cooking odours.

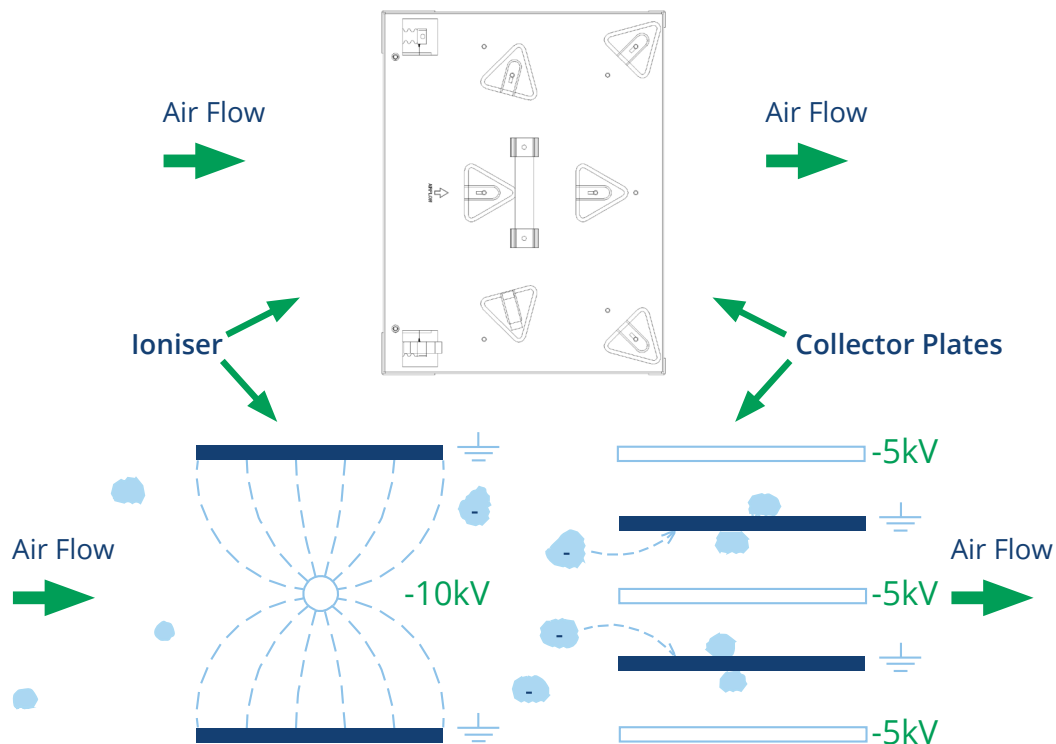

The above diagram shows, in a basic visual, how an electrostatic precipitator works. As air passes into the combined ioniser / collector cell, the particulates in the air stream are polarised to a negative potential. As they continue through the ioniser and between the collector cell plates, the polarised particulates are repelled away from the negatively charged plates and attracted to the earthed plates where they stick and so are filtered out of the air flow.

Our ESP units fit in-line with the kitchen ducting and can be configured modularly to cope with all extract volume requirements.

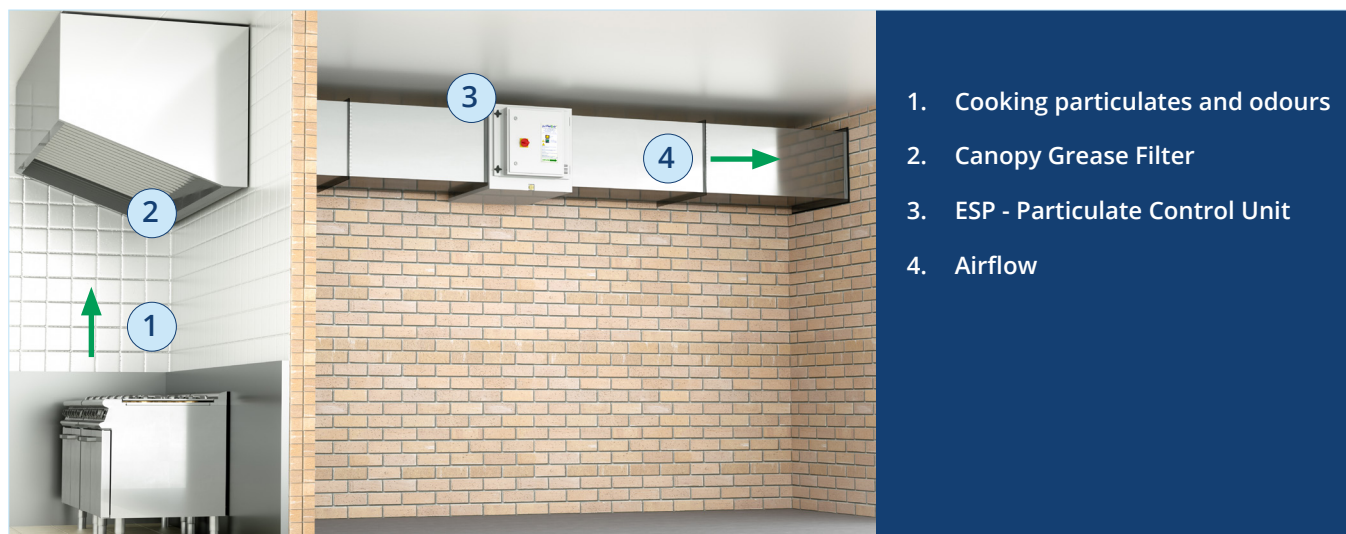

## KEY FEATURES

- Eliminates up to 98% of oil, grease and smoke particles
- Filters particles down to sub-micron levels
- Produces Ozone to help reduce malodours
- Designed with an integral sump
- Modular in design
- Specifically designed for commercial kitchen application
- Energy efficient: - uses no more than 50W
- Greatly reduces grease build-up within the duct run



3 ESP Units Stacked in modular formation



4 ESP Units Stacked in modular formation with a double pass

## Technical Specification

|                   | ESP 1500E                    | ESP 3000E                    | ESP 4500E                    | ESP 6000E                    |
|-------------------|------------------------------|------------------------------|------------------------------|------------------------------|
| Electrical Supply | 220/240V 50Hz                | 220/240V 50Hz                | 220/240V 50Hz                | 220/240V 50Hz                |
| Power Consumption | 20 Watts                     | 30 Watts                     | 40 Watts                     | 50 Watts                     |
| Max Air Volume    | up to 0.7m <sup>3</sup> /sec | up to 1.4m <sup>3</sup> /sec | up to 2.1m <sup>3</sup> /sec | up to 2.8m <sup>3</sup> /sec |
| Dimensions W/H/D  | 450mm/630mm/<br>640mm        | 900mm/630mm/<br>640mm        | 1350mm/630mm/<br>640mm       | 1800mm/630mm/<br>640mm       |
| Weight            | 55Kg                         | 85Kg                         | 118Kg                        | 153Kg                        |