NOTE: All laps, lengths and drips not to exceed the lengths recommended for the relevant code thickness within LSTA technical guidance. Generally all step flashings not to exceed 1500mm in length, Code 6 gutters max. length 2250 max. girth 850mm, Code 8 gutters max length 3000, max. girth 1000mm. Any deviations in design / installation against LSTA requirements to be reported to the Project Architect prior to installation. All existing timber gutter formwork to be examined and confirmed as in suitable condition prior to installation of new leadwork to gutters

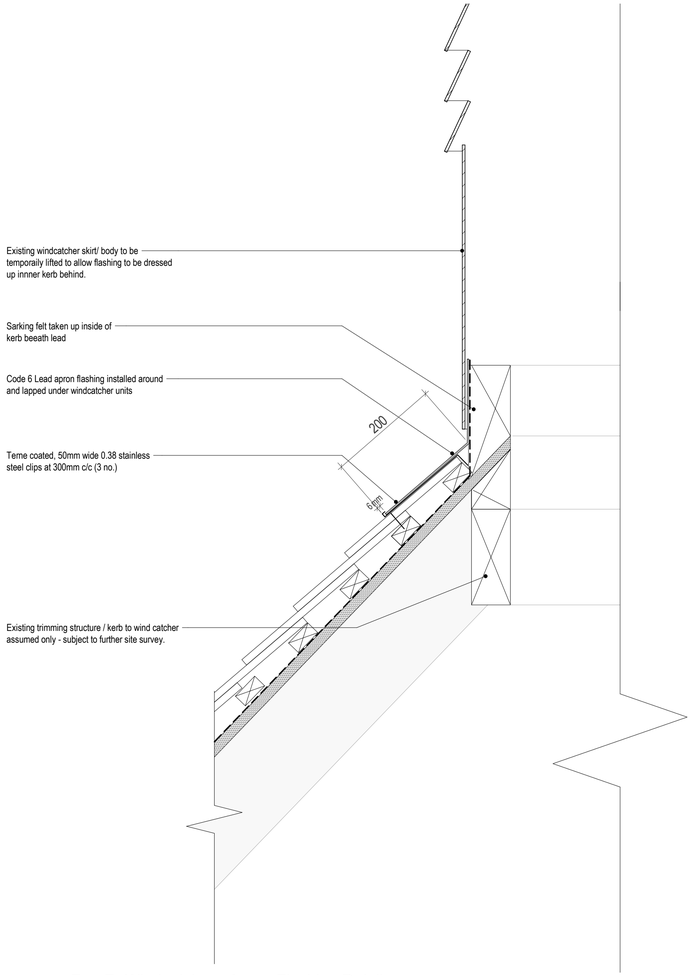

1 Windcatcher - Apron Flashing Detail
1 : 5

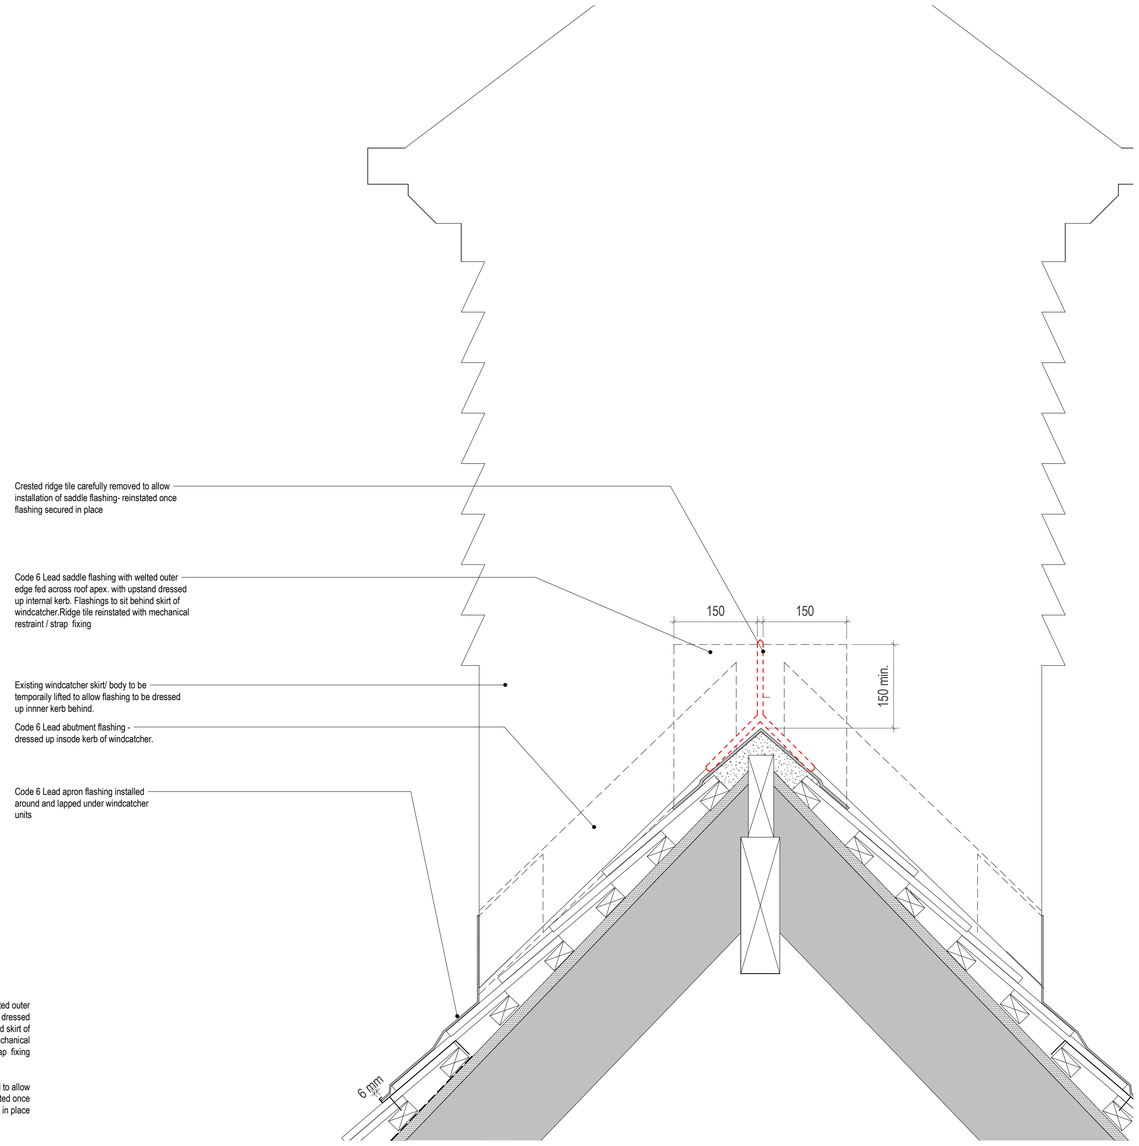

2 Windcatcher Detail Saddle
1 : 5

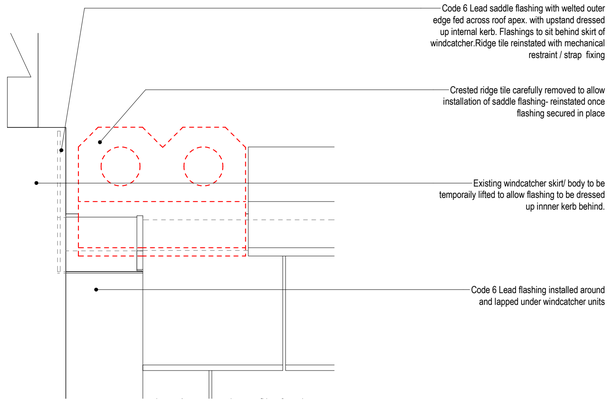

3 Roof detail - Ridge Elevation
1 : 5

NOTE : All for sides of 3 No. Windcatchers to be have flashings removed and replaced as shown. All Flashings as Code 6, All Laps min. 100mm.
All as recommended within LSTA technical guidance- Any discrepancies between design and techncial guidance to be raised with Project Architect prior to installation

Notes:
- This drawing is copyright.
- Do not scale dimensions from this drawing.
- This drawing is to be read in conjunction with all other relevant drawings.
- All discrepancies on this drawing are to be reported to the architect.
- Do not modify any element of this drawing.
- Use drawing only for purpose(s) issued.
- This drawing may contain colour.

North Point

Scale Bar

Key Plan

Hazard

HAZ-xx
To warn of significant hazards or information that is unusual

To be read in conjunction with all other consultant's information

Refer to CDM Schedule XXXX-RI-WB-XX-SC-A-572-0010

The following external model files are included within this drawing:

Rev	Date	Revision Notes	Drawn	Review
P1	2025/03/20	Issued for pricing	EM	RM

Logos

[INSERT CLIENT / CONTRACTOR LOGO OR NAME HERE (IF REQUIRED)]

ARCADIS
www.arcadis.com

Project
Rutherford Building

Drawing Title
Roof Detail 20 - Wind Catcher Abutment

Job Number	Date	Security Classification	Drawn By
141532	NOV'24		MTW
Scale@A1	Purpose		Reviewed By
As indicated	PRELIMINARY		RM
Drawing Number			Revision
2441-RBUM-ARC-XX-RL-DR-A-2441			P1