


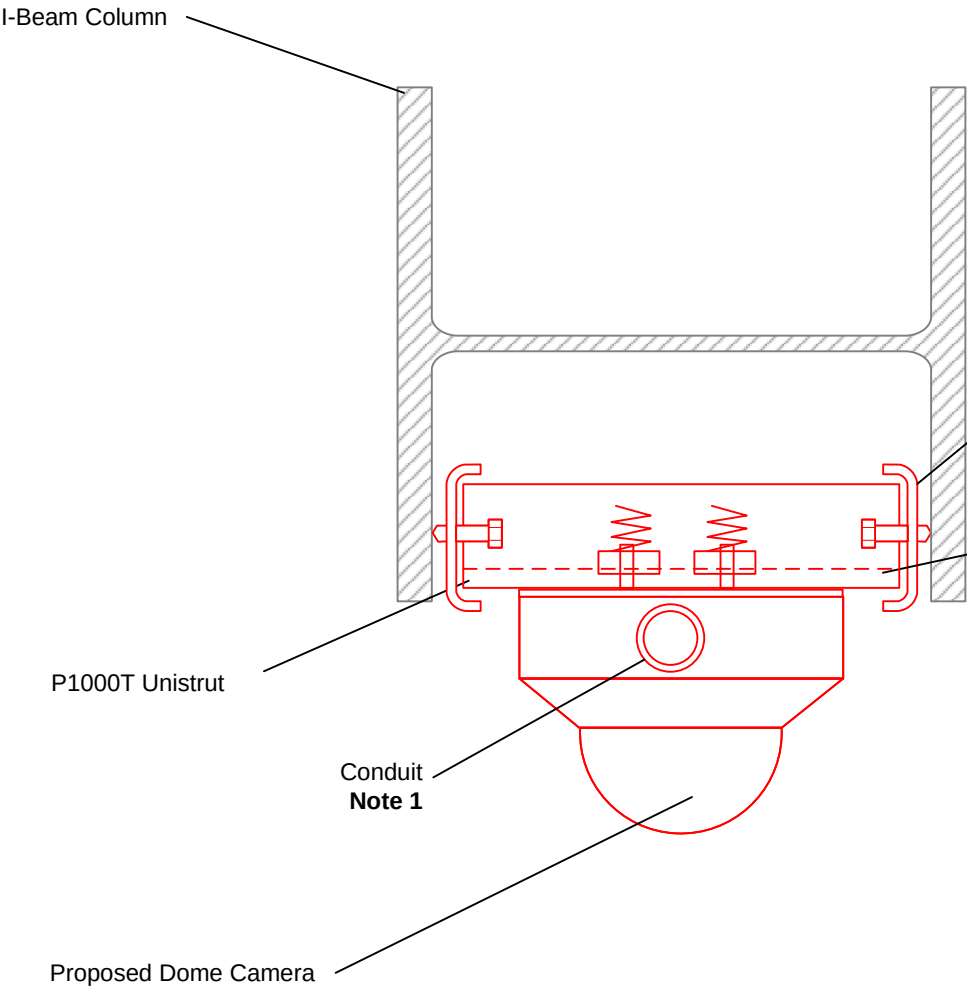

Girder clamp brackets fitted into ends of unistrut


Mounting plate mounted to Unistrut with M5 bolts and channel nuts

25mm Conduit girder clipped to column

25mm Kopex to the camera
Note 1

Girder clamp brackets fitted into ends of unistrut

Camera ID label to be installed on the housing bevel on the bottom side so to be seen from the ground

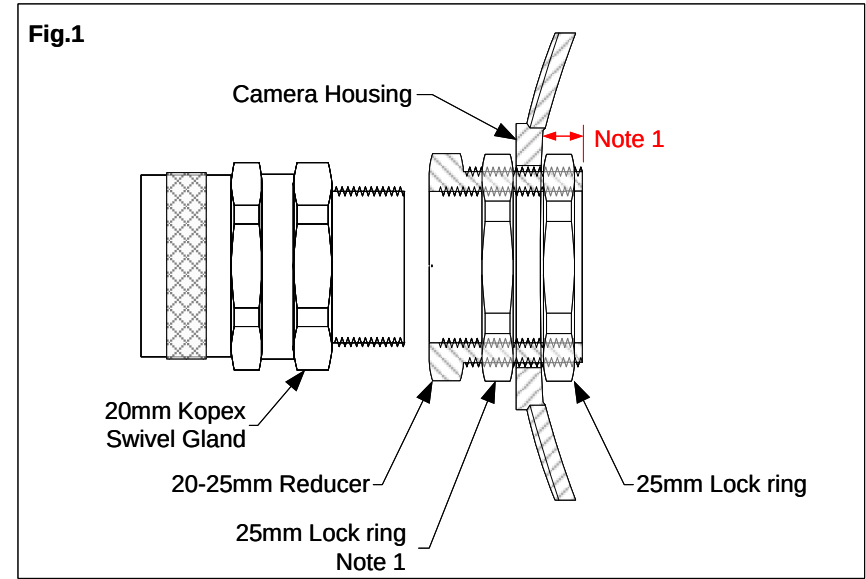

- Notes**
1. Within the camera housing there is insufficient clearance for a gland or reducers threads and a lock ring. Therefore a second locking is to be installed on the outside of the housing to ensure no more than 7mm of the reducer protrudes within the housing. See **fig.1**.
 2. The camera mounting plate accommodates M5 bolts. M5 channel nuts are to be used. These are available from Orbital Fasteners (SKU:2240920)

KEY:

BLACK – Existing
RED – Proposed
BLUE – Modify
GREEN – Remove

P01	13/11/19	For Information	JAG	DGF	MS
Rev	Date	Description of Revisions	Drawn	Chkd	Appr

Status
FOR INFORMATION

Contractor

**Linbrooke**
People • Technology • Connectivity

Address

Unit 2,3 & 4 Churchill Way
Chapelton
Sheffield
S35 2PY

Project

LINBROOKE GENERIC DRAWINGS

Drawing Title

DOME CAMERA I-BEAM MOUNT

Designed	J. GATLEY	Sig	Date	13/11/19
Drawn	J. GATLEY	Sig	Date	13/11/19
Checked	D. FERGUSON	Sig	Date	13/11/19
Approved	M. SIDDALL	Sig	Date	13/11/19
Scale	N.T.S.	ELR & Mileage	N/A	
Alternative Reference				Sheet 1 of 1
Drawing Number LBR-GEN-CCTV-007				Revision P01