

Sash Travel Restrictors




Features


- Convenient**
Simple and cost effective method to restrict the opening on sliding sash windows
- Designed with safety in mind**
The robust restrictor positioned on the sash limits the opening of the window. Prevents the travel of the sash beyond a designated position.
- Enhanced security**
Fitted with a key operated locking barrel to secure bolt in locked position.
- Ease of application**
Non-handed for ease of application and stocking. It is recommended that a restrictor is fitted to both sides of the sash
- Discreetly sits on window**
Routed into the sash discreetly to appear as part of the window, with both side and face fix versions available for maximum choice
- Perfectly Matching**
Available in the complete range of Hardex finishes that perfectly matches to the hardware range for sliding windows, casement windows and doors
- Designed for PVCu, Timber and Aluminium sliding windows**
To suit all window materials
- Easi-Glide Feature**
Enables the user to easily engage and disengage bolt, so the sash can move up and down freely
- Integrated Bump Stop**
To minimise any marking on the bottom sash.




Hardex
Chrome




Hardex
Graphite



Hardex
Bronze



Hardex
Gold



Antique
Black



Hardex
Pewter



White



Black

Sash Travel Restrictors

Ordering Details

Product

Sash Travel Restrictor

Finish	Side Fix	Face Fix
Hardex Chrome	VHTRSFHC01	VHTRFFHC01
Hardex Bronze	VHTRSFHB01	VHTRFFHB01
Hardex Gold	VHTRSFHG01	VHTRFFHG01
Hardex Graphite	VHTRSFGR01	VHTRFFGR01
Hardex Pewter	VHTRSFPT01	VHTRFFPT01
Antique Black	VHTRSFAB01	VHTRFFAB01
White	VHTRSFWH01	VHTRFFWH01

Technical Information

Corrosion Resistance

Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours)

Performance

Meets the requirements of BS EN 14351-1 clause 4.8

Material Specification


Lock body:	Zinc Die Cast, Stainless Steel
Bolt:	Zinc Die Cast
Coatings:	Hardex Chrome, Hardex Bronze, Hardex Gold, Hardex Pewter, Antique Black, Hardex Graphite and White.
Bolt stop:	Zinc Die Cast
Key:	Steel
Recommended screws:	4mm x 20/25mm twin thread countersunk pozi No2 point screws

Packaging

Sash Travel Restrictors

Individually bagged, 30 per box

Side fix



Face fix

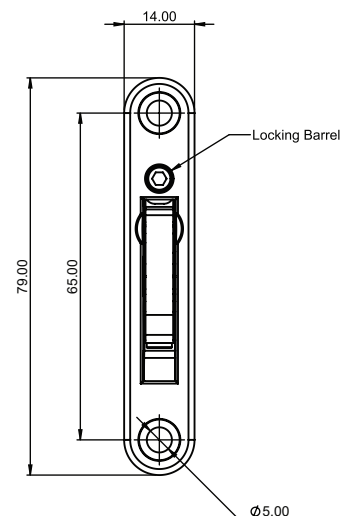
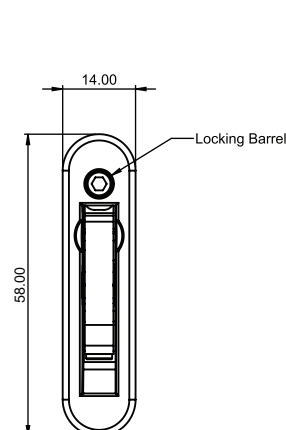


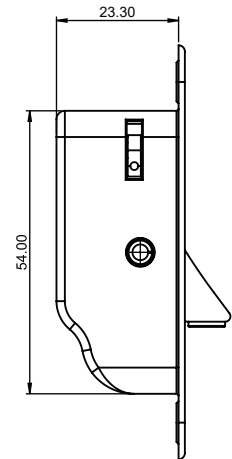
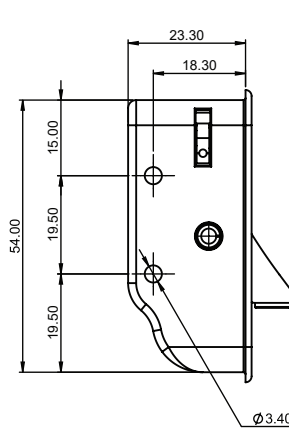



Diagram not to scale
All dimensions are in mm and are nominal.
ERA reserves the right to change specification without notice