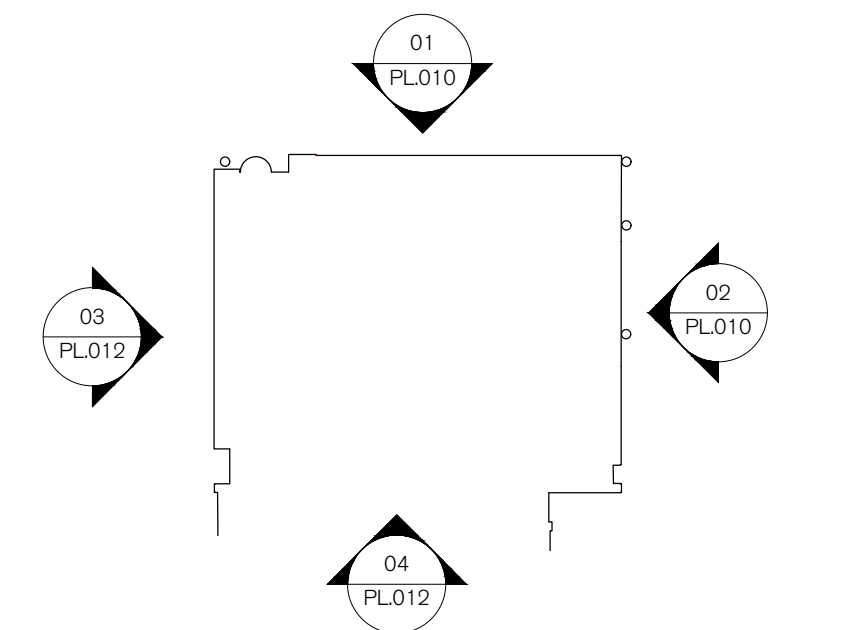


New double glazed units installed to existing curtain walling system, glazing and tint to match existing. Refer to PL013 for extents.

Existing SG glazing system to mullions replaced with standard capped system. Black PPC finish. Cap profile to be Schuco 50/15 standard cover cap

New hook on metal panels fixed to face of new spandrel panels achieving hairline joint. Colour and finish to match existing spandrel panels.

1

PROPOSED WEST ELEVATION 03
1:100

New hook on metal panels fixed to face of new spandrel panels achieving hairline joint. Colour and finish to match existing spandrel panels.

New hook on metal panels fixed to face of new spandrel panels achieving hairline joint. Colour and finish to match existing spandrel panels.

ADJOINING BUILDING

2

PROPOSED SOUTH ELEVATION 04
1:100

REV.	ISSUED	DESCRIPTION	DRAWN	CHECKED
P01	05.02.25	UPDATES TO CAP DETAIL AND FINISH, ADDITION OF HOOK ON SPANDREL PANELS	CW	DRC
-	-	-	-	-
-	-	-	-	-

PROJECT
BAUHAUS
MANCHESTER

DESCRIPTION
PROPOSED WEST & SOUTH
ELEVATION (1 OF 2)

DATE
OCT '24

SCALE AT A1
1:100

JOB NO
24.066

STATUS
PLANNING

DRAWN
CW

CHECKED
CK

DRAWING NO
PL012

REV
P01

CLIENT
ORCHARD STREET INVESTMENT MANAGEMENT

S
& P