




**TO BE READ IN CONJUNCTION WITH RELEVANT
'SITE PREPARATION DOCUMENT'**

THE CONTRACTOR IS RESPONSIBLE FOR CHECKING DIMENSIONS, TOLERANCES, AND REFERENCE. ANY DISCREPANCIES TO BE CHECKED WITH THE ARCHITECT BEFORE PROCEEDING WITH THE WORKS.

NO. 5 KEY HEIGHT SHOWN IS OPTIMUM SUBJECT TO SITE CONFIRMATION.

1.	<u>EXTERNAL REMOVALS:</u>
1.1	Contractor to review asbestos register in branch property file.
1.2	Disconnect power, alarm, data & IT from ATMs to be removed.
1.3	Remove existing ATMs & Plinths/Baseplates.
2.	<u>PROPOSED:</u>
2.1	Once existing ATM is removed, adjust existing aperture to anti-bandit specification, in line with aperture requirements for the new ATM.
2.2	All replacement ATMs to be positioned on centreline of existing removed device unless otherwise noted on this drawing.
2.3	Modify wall apertures as required
2.4	Reduce wall thickness as required
2.5	Install new plinths/Baseplates & ATMs
2.6	Install new collars/Tablets
2.7	Disconnect/reconnect data & power
3.	<u>DECORATION & FINISHES:</u>
3.1	All affected areas to be made good and finished to match existing, to contractors scope of works and NatWest Design Guide
4.	<u>M&E & I.T.:</u>
4.1	Install power and data to new ATM
5.	<u>SECURITY:</u>
5.1	Provide security alarms to new ATM

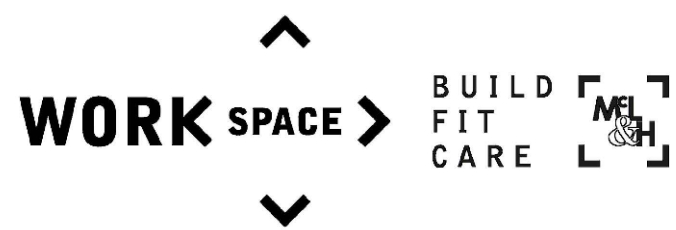

Castleton House
15 Trench Road
Mallusk
BT36 4TY

Description:
ATM REPLACEMENT

Job No.: 5560	Scale: AS-SHOWN	Drawn by: PATS	Status: PROPOSAL	Date: 17-12-2024
-------------------------	---------------------------	--------------------------	----------------------------	----------------------------

5560-WKS-00009-043