


Last information update: September 2022

Product configuration: BW85

BW85: Bollard 170x170mm H=1000mm Warm White Led with DALI electronic ballast and symmetrical optic

**Product code**

BW85: Bollard 170x170mm H=1000mm Warm White Led with DALI electronic ballast and symmetrical optic

Technical description

Outdoor direct light luminaire which can be planted in the ground, designed to use warm white LED lamps, with symmetrical optic. The product consists of the lamp assembly and the body. The parallelepiped body is made of extruded aluminium with chromate coating treatment and painting. It houses the three stainless steel rods fixed to the base, giving the product a high level of resistance to impacts. The product is anchored to the ground by the fixing base made of corrosion-resistant low copper content die-cast aluminium alloy. The diffuser screen is made of transparent polycarbonate, and is secured to the component-holding box by a die-cast aluminium internal fixing ring. The sheet aluminium lamp cover guard includes housings for accessories. The ring for coupling the cover is made of die-cast aluminium with chromate coating treatment and painting. The top of the luminaire is closed by a die-cast aluminium outer cover, with a bayonet catch and a fixing screw. The screw can be removed with an Allen key (or with a special key upon request). The super-pure aluminium reflector is fixed to the inner cover plate by captive screws. The component-holding box is made of die-cast aluminium. All accessible parts have a top temperature of 50° C. All external screws used are made of A2 stainless steel.

Installation

Can be installed directly using Fischer fixings (on the ground), or using a fixing base and fixing plate with clamps coated in Dacromet, for an additional guarantee against corrosion (to be ordered separately).

Colour

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

Weight (Kg)

12.14

Mounting

ground anchored

Wiring


Inside the luminaire is the removable component-holding plate, secured to the box with captive screws and the quick coupling for the electrical connections. DALI Electronic control gear. Complete with rubber output cable A07RN-F 4x1mm L=1700 mm.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	1080	Ballast losses [W]:	1.4
W system:	12.4	Lamp code:	LED
Im source:	2000	Number of lamps for optical assembly:	1
W source:	11	ZVEI Code:	LED
Luminous efficiency (Im/W, real value):	87.1	Number of optical assemblies:	1
Im in emergency mode:	-	Intervall temperatura ambiente:	from -20°C to +35°C.
Total light flux at or above an angle of 90° [Lm]:	115	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	54	Inrush current:	9.2 A / 25 µs
CRI (minimum):	80	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 27 luminaires B16A: 44 luminaires C10A: 45 luminaires C16A: 74 luminaires
Colour temperature [K]:	3000	Minimum dimming %:	5
MacAdam Step:	3	Overvoltage protection:	6kV Common mode & 6kV Differential mode
Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)	Dimming mode:	CCR
Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)	Control:	DALI

Polar

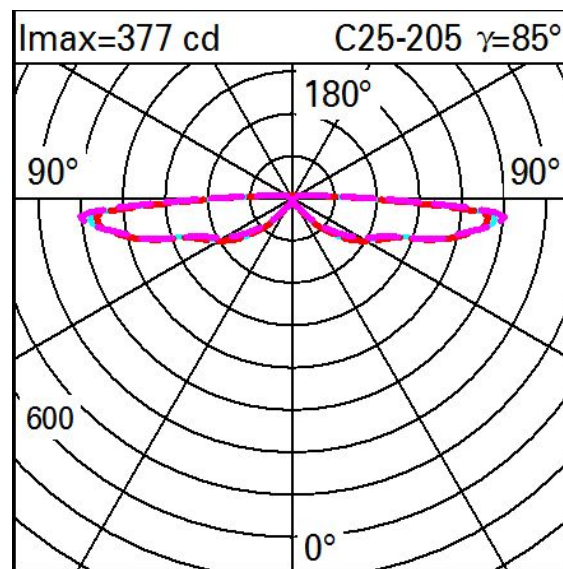

Isolux

