

- — Tiling setting out centreline
- — Location of cut tiles - min 37.5mm - max 112.5mm
- - - Tile pattern lined through
- Direction of tile bond

- **T1** Type 1 Walkway Threshold
- **T2** Type 2 Recessed Threshold (Bullnose)
- **Lowest threshold - Top of Wade channel grate (TOG) to be set from this level. TBC on site by contractor.**
- **Tile movement joint at falls direction change and all subfloor junctions (changes in structural deck level and/or void former build up)**

	Type A - New polished screed finish internal floor
	Type B - Uninsulated unbonded screed on concrete deck
	Type B2 - Uninsulated unbonded screed on steel deck
	Type B3 - Uninsulated modified screed on steel deck
	Type B4 - Bonded screed on concrete deck
	Type C / C2 - Insulated over concrete deck
	Type D1 - Recessed Threshold - Screed over existing deck
	Type D2 - Recessed Threshold - Screed over existing deck
	Type D3 - Recessed Threshold - Screed over existing deck


- Drainage channel with cast iron grating
Channel ordered and on site
- Sealed channel system to allow for quarry tile finish - channel ordered and on site
- New drainage channel with cast iron grating
- New drainage channel - sealed system to allow for quarry tile finish

Existing levels used for this setting out have been taken from MHSL survey drawings.


Falls and final build ups to be confirmed by sub-contractor and approved by architect.

All falls to be 1 in 60 towards the open channels
unless otherwise noted (1 in 80 min) — — — — —

All existing thresholds to be retained considered level to approved document Part M and protected from rainwater penetration. Level of channel grille to be <15mm below threshold level. See dwg 4107.

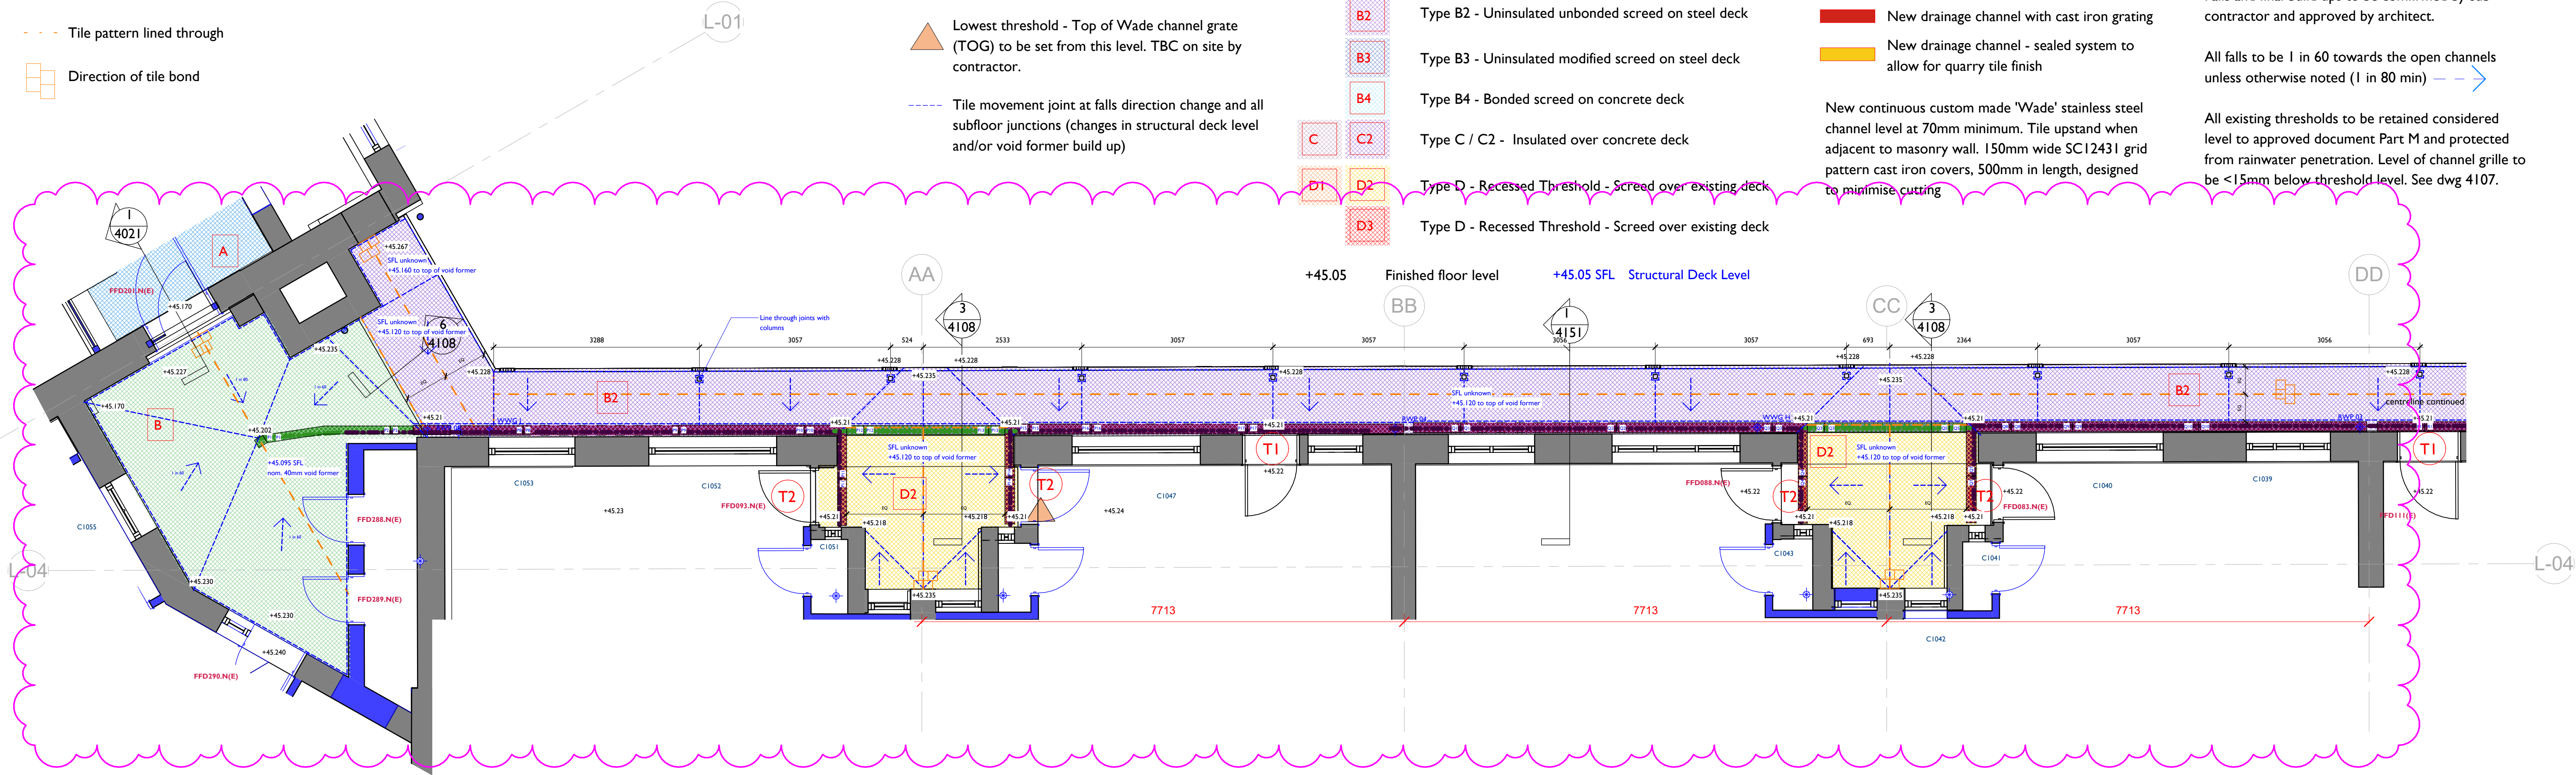

01 First Floor - Fairfield St Walkway East
1 : 50

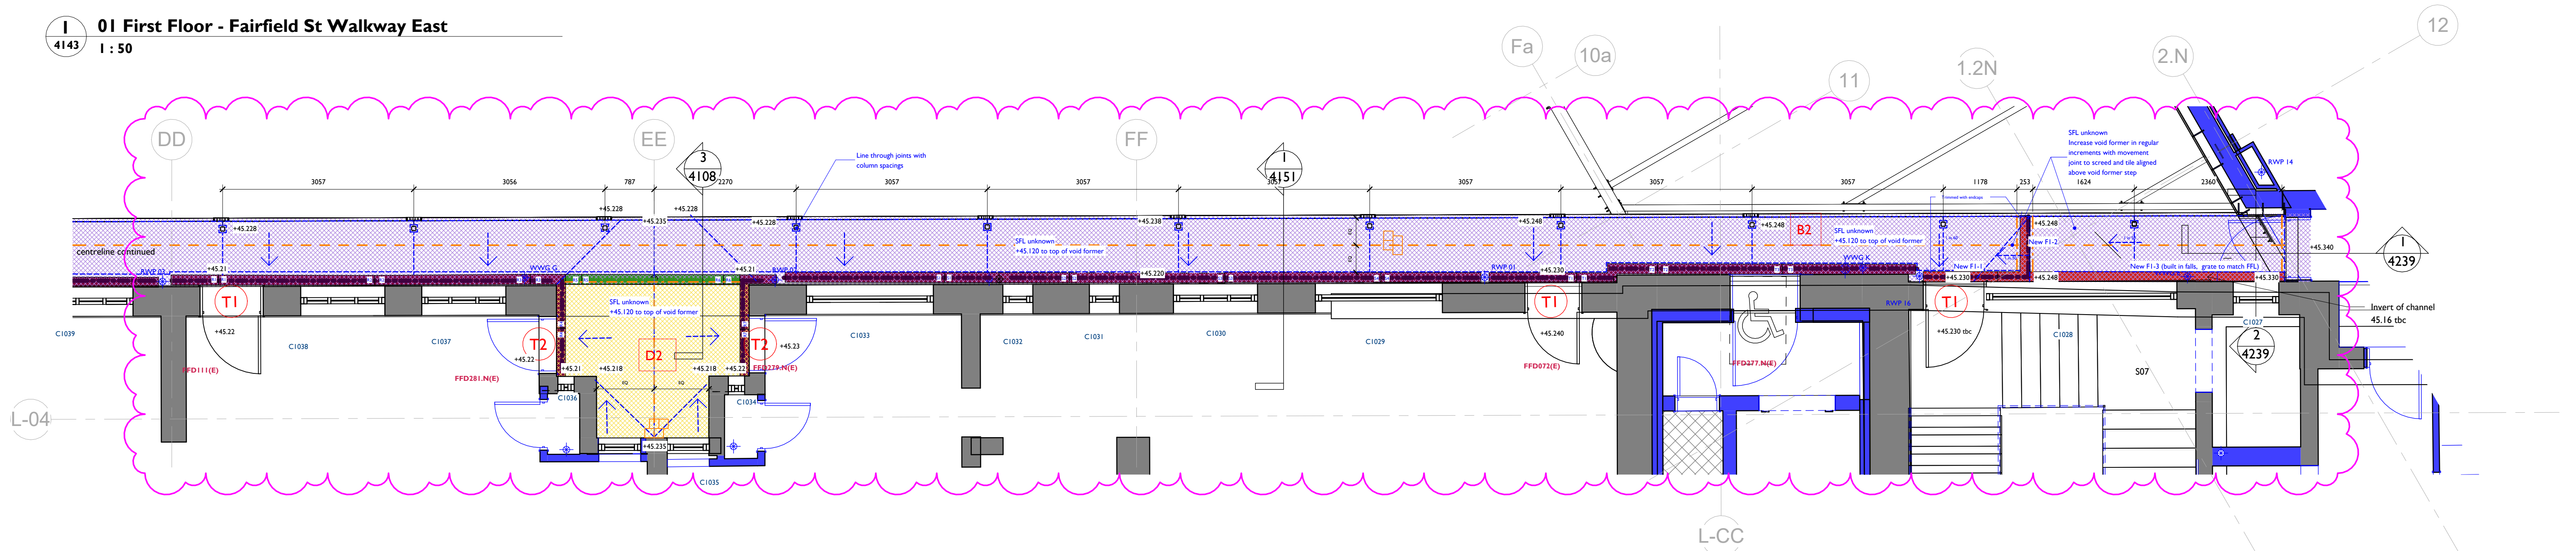

2 01 First Floor - Fairfield St Walkway West

Purcell shall be notified in writing of any discrepancies.

P.1	25.02.2024	Aconex upload - For Information
P.2	05.03.2024	Changes to Walkways and details
C.01	13.03.2024	Walkway levels
C.02	15.03.2024	WS4 Issue - Aconex Upload
P.3	15.03.2024	Walkway Details and Setting Out
C.03	21.05.2024	Aconex upload - Previous Status A, now For Construction
C.04	30.01.2025	Aconex upload - Walkway movement joints added
REV	DATE	DESCRIPTION

TITLE	Proposed Walkway Level I Fairfield Street
-------	--

SIZE	SCALE	LAST REVISED	DRAWN	CHECKED
AIL	As Shown	31/01/2025 18:15:28		SB
REV	SUITABILITY/REASON FOR ISSUE			
C.04	FOR CONSTRUCTION			
DRAWING NUMBER				
LRFS-PUR-00-01-DR-A-4143				

