


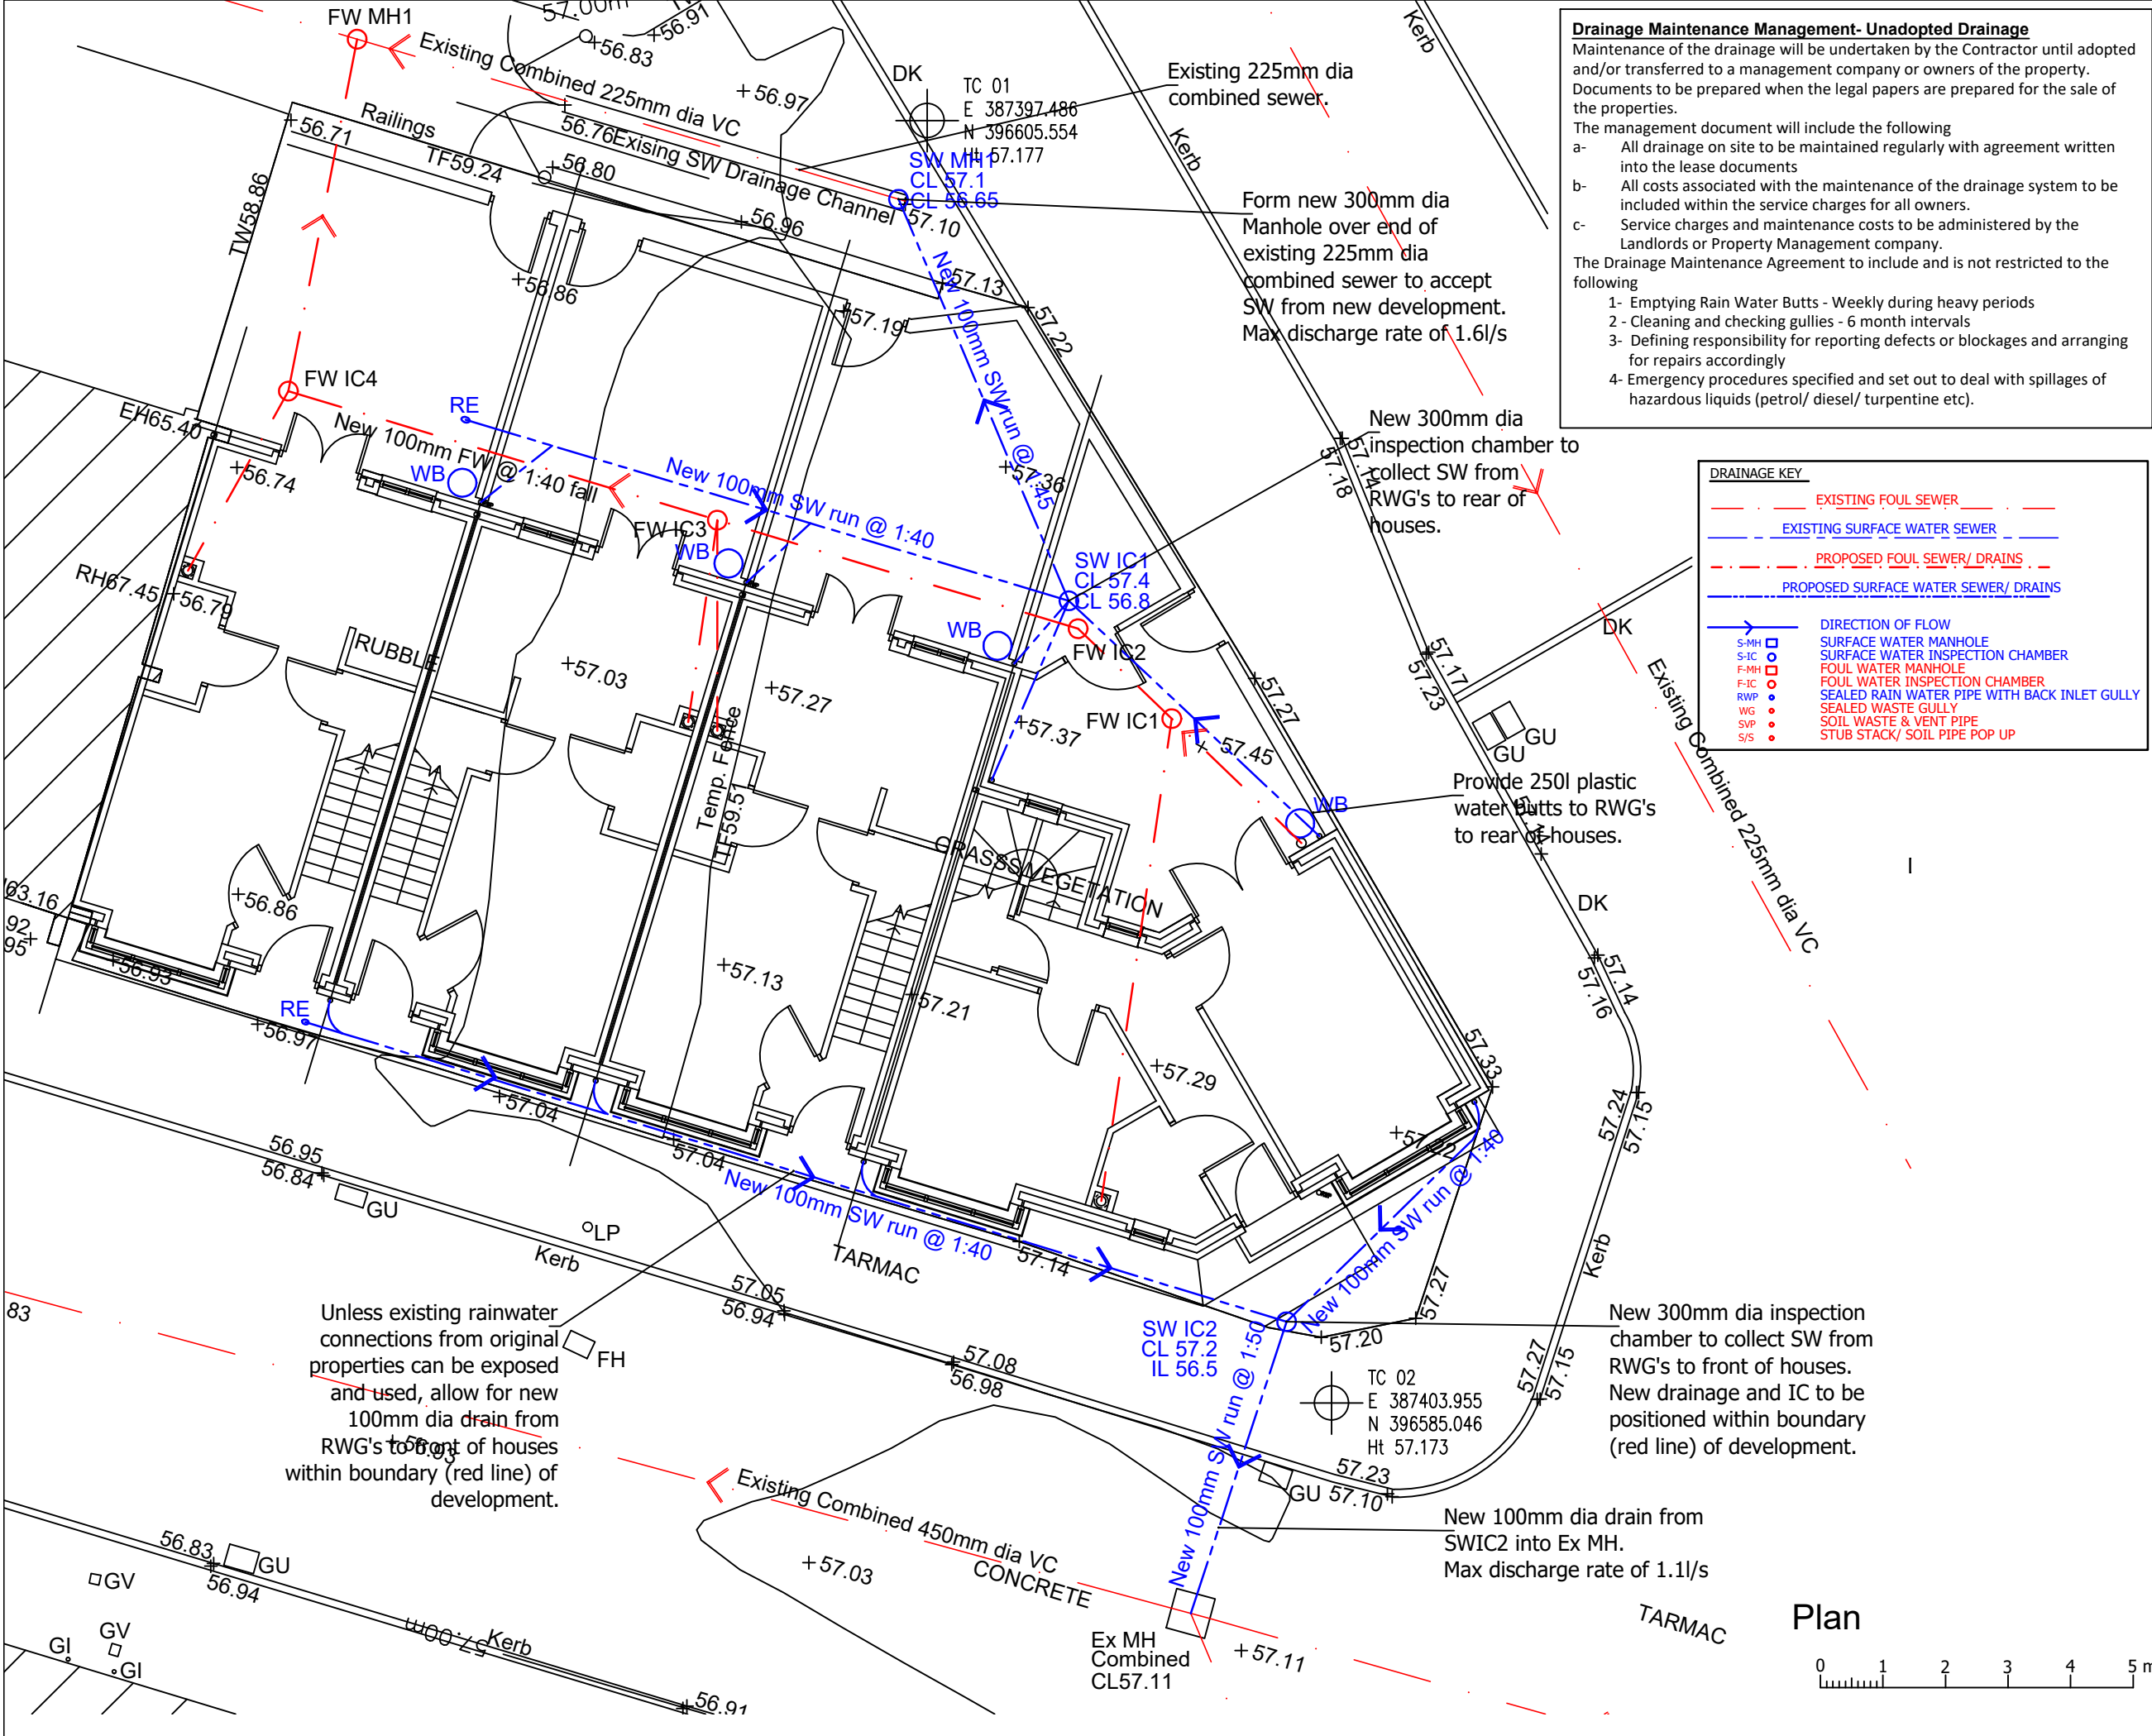

Drainage Maintenance Management- Unadopted Drainage
Maintenance of the drainage will be undertaken by the Contractor until adopted and/or transferred to a management company or owners of the property. Documents to be prepared when the legal papers are prepared for the sale of the properties.

The management document will include the following

- a- All drainage on site to be maintained regularly with agreement written into the lease documents
- b- All costs associated with the maintenance of the drainage system to be included within the service charges for all owners.
- c- Service charges and maintenance costs to be administered by the Landlords or Property Management company.

The Drainage Maintenance Agreement to include and is not restricted to the following

- 1- Emptying Rain Water Butts - Weekly during heavy periods
- 2 - Cleaning and checking gullies - 6 month intervals
- 3- Defining responsibility for reporting defects or blockages and arranging for repairs accordingly
- 4- Emergency procedures specified and set out to deal with spillages of hazardous liquids (petrol/ diesel/ turpentine etc).

DRAINAGE KEY

- EXISTING FOUL SEWER
- EXISTING SURFACE WATER SEWER
- PROPOSED FOUL SEWER/ DRAINS
- PROPOSED SURFACE WATER SEWER/ DRAINS
- DIRECTION OF FLOW
- S-MH SURFACE WATER MANHOLE
- S-IC SURFACE WATER INSPECTION CHAMBER
- F-MH FOUL WATER MANHOLE
- F-IC FOUL WATER INSPECTION CHAMBER
- RWP SEALED RAIN WATER PIPE WITH BACK INLET GULLY
- WG SEALED WASTE GULLY
- SVP SOIL WASTE & VENT PIPE
- S/S STUB STACK/ SOIL PIPE POP UP

The Copyright of this drawing belongs to STL Projects Ltd and shall not be used or reproduced in any form without its express permission. The moral right of the Author is hereby asserted - Copyright © 2000. Do not scale from this drawing - Work to figured dimensions only. All dimensions to be confirmed with Architect, where applicable, or checked on site prior to the execution of any work. For the avoidance of doubt all dimensions are measured to wall structure and not the finishes unless otherwise stated. Where any discrepancy is found to exist within or between drawings and/or documents it should be reported to the engineer immediately. STL Projects Ltd shall not be liable for any use of drawings & documents for any purpose other than for which the same were prepared by or on behalf of STL Projects Ltd. This drawing is to be read in conjunction with all other relevant information.

STL
CONSULTING STRUCTURAL ENGINEERS

1 Barkers Lane Sale Cheshire M33 6RP
t: 0161 969 3218
e: info@stlprojectsLtd.co.uk
www.stlprojectsLtd.co.uk

Preliminary

Revisions:

Date	Revision Details
H	
G	
F	
E	
D	
C	
B	
A	

☐ ISSUED AS WORKING DRAWING
☐ CLIENT APPROVED
☒ PRELIMINARY

Client:
OSLADY Homes Ltd

Project:
Great Jones Street

Title:

PROPOSED REDEVELOPMENT

PROPOSED SURFACE WATER DRAINAGE SCHEME

Drawn: VS **Scale:** As shown @ A3

Checked by: JH **Date:** July '24

Drawing No. **22-5583 DR01** **P2**