
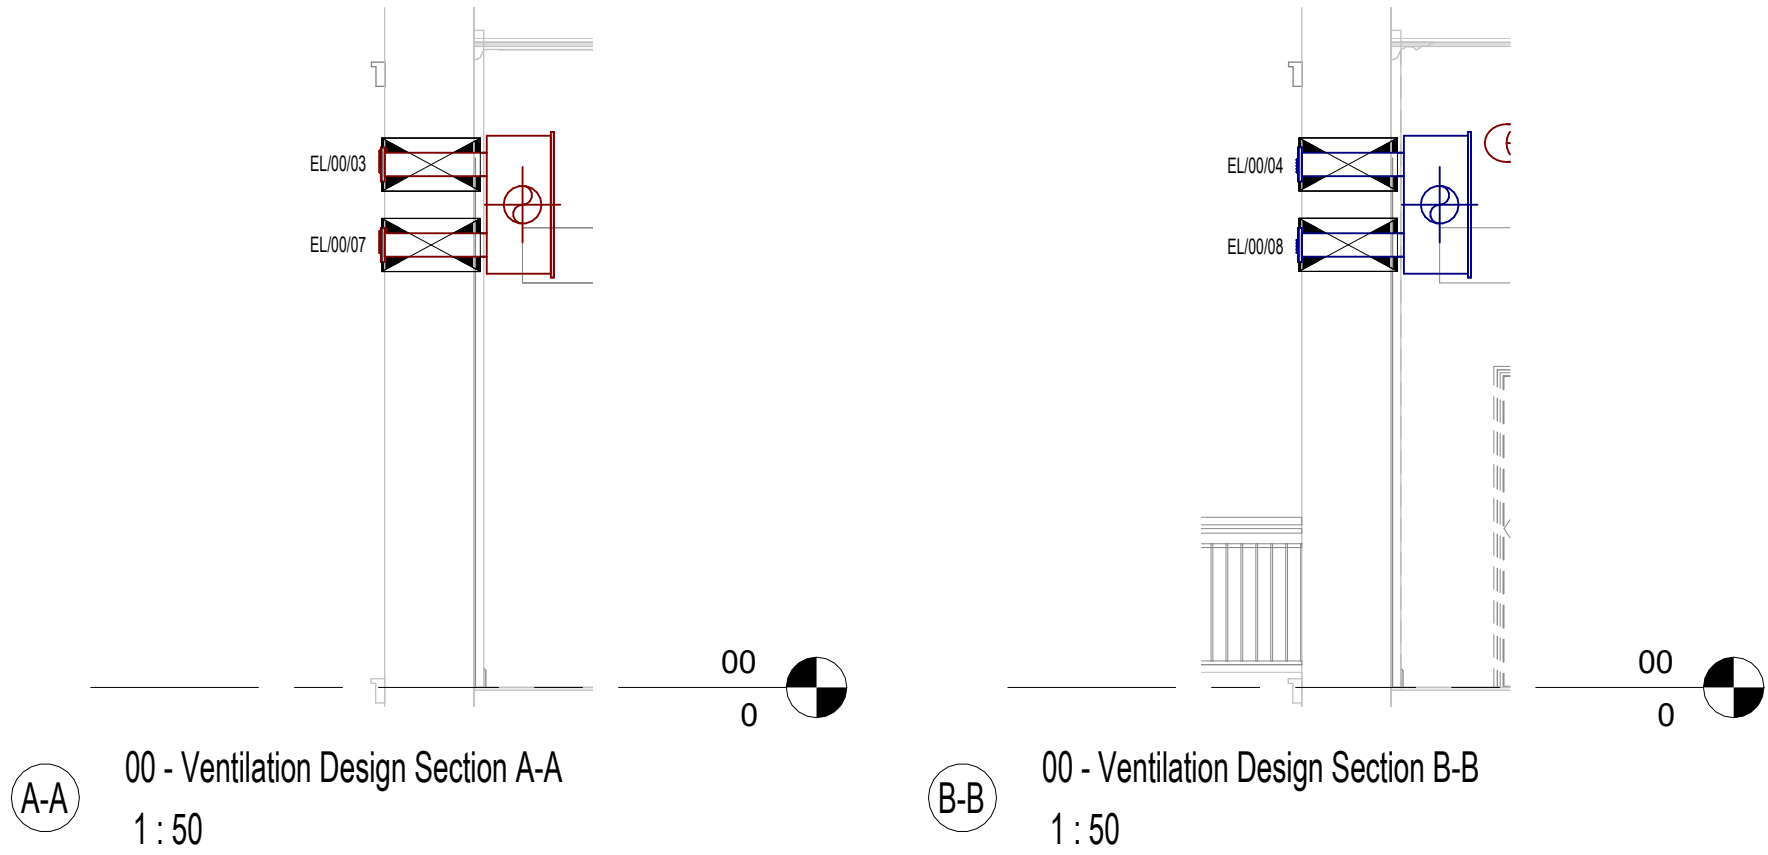


- VENTILATION NOTES:
- THIS DRAWING IS FOR COSTING ONLY. FULLY CO-ORDINATED, DETAILED INSTALLATION DRAWINGS MUST BE PROVIDED BY THE CONTRACTOR.
 - ALL EQUIPMENT AND GRILLES TO BE SUSPENDED BY BUILDING STRUCTURE.
 - ALL SHEET METAL DUCTWORK SHALL BE PROVIDED WITH ACCESS DOORS IN COMPLIANCE WITH RECOMMENDATIONS MADE WITHIN HVAC PUBLICATION 'CLEANLINESS OF VENTILATION TR17'. ALL POSITIONS OF ACCESS DOORS SHALL BE DETAILED ON THE CONTRACTORS WORKING DRAWING. ACCESS PANELS TO BE PROVIDED BOTH SIDED OF FIRE-SMOKE DAMPERS & VOLUME CONTROL DAMPERS.
 - ALL FLEXIBLE CONNECTIONS TO BE MAXIMUM OF 300mm.
 - ALL GRILLES TO BE CO-ORDINATED ON SITE IN CONJUNCTION WITH ALL OTHER SERVICES.
 - THE CONTRACTOR SHALL ALLOW FOR ALL SECONDARY STEELWORK NECESSARY FOR DUCTWORK SUPPORTS, ETC.
 - THE LAYOUT SHOWS A GENERAL SOLUTION FOR PRINCIPLE CO-ORDINATION ROUTES. THEY ARE NOT CONSTRUCTION DRAWINGS AND THEREFORE DO NOT SHOW ALL BENDS, TEE'S, SETS etc. THAT MAY BE NECESSARY TO LOCATE SERVICES CORRECTLY TO AVOID CLASHES AND MAXIMISE MAINTENANCE ACCESS. THE CONTRACTOR IS NEVER THE LESS DEEMED TO HAVE INCLUDED ALL SUCH MATERIALS AS REQUIRED TO PRODUCE A COMPLETE, FULLY CO-ORDINATED LAYOUT.
 - ALL DUCTWORK TO BE MANUFACTURED IN ACCORDANCE WITH HVCA DW 144 AND TO BE INTERNALLY LINED, INTERNAL 25mm INSULATION c/w PPC EXTERNAL FINISH AS PER ARCHITECTS PREFERENCE RAL 9010
 - ALL DUCTWORK PASSING THROUGH FIRE WALLS TO BE COMPLETE WITH FIRE-SMOKE DAMPERS INCLUDING BUILDING IN FRAMES.
 - THE FIRE-SMOKE DAMPER INSTALLATION METHOD MUST HAVE BEEN TESTED AND COMPLY WITH BSEN 1366-2 AND DW145. CONTRACTOR TO CHECK DAMPER MANUFACTURERS LATEST TESTED AND APPROVED INSTALLATION METHODS PRIOR TO INSTALLATION.

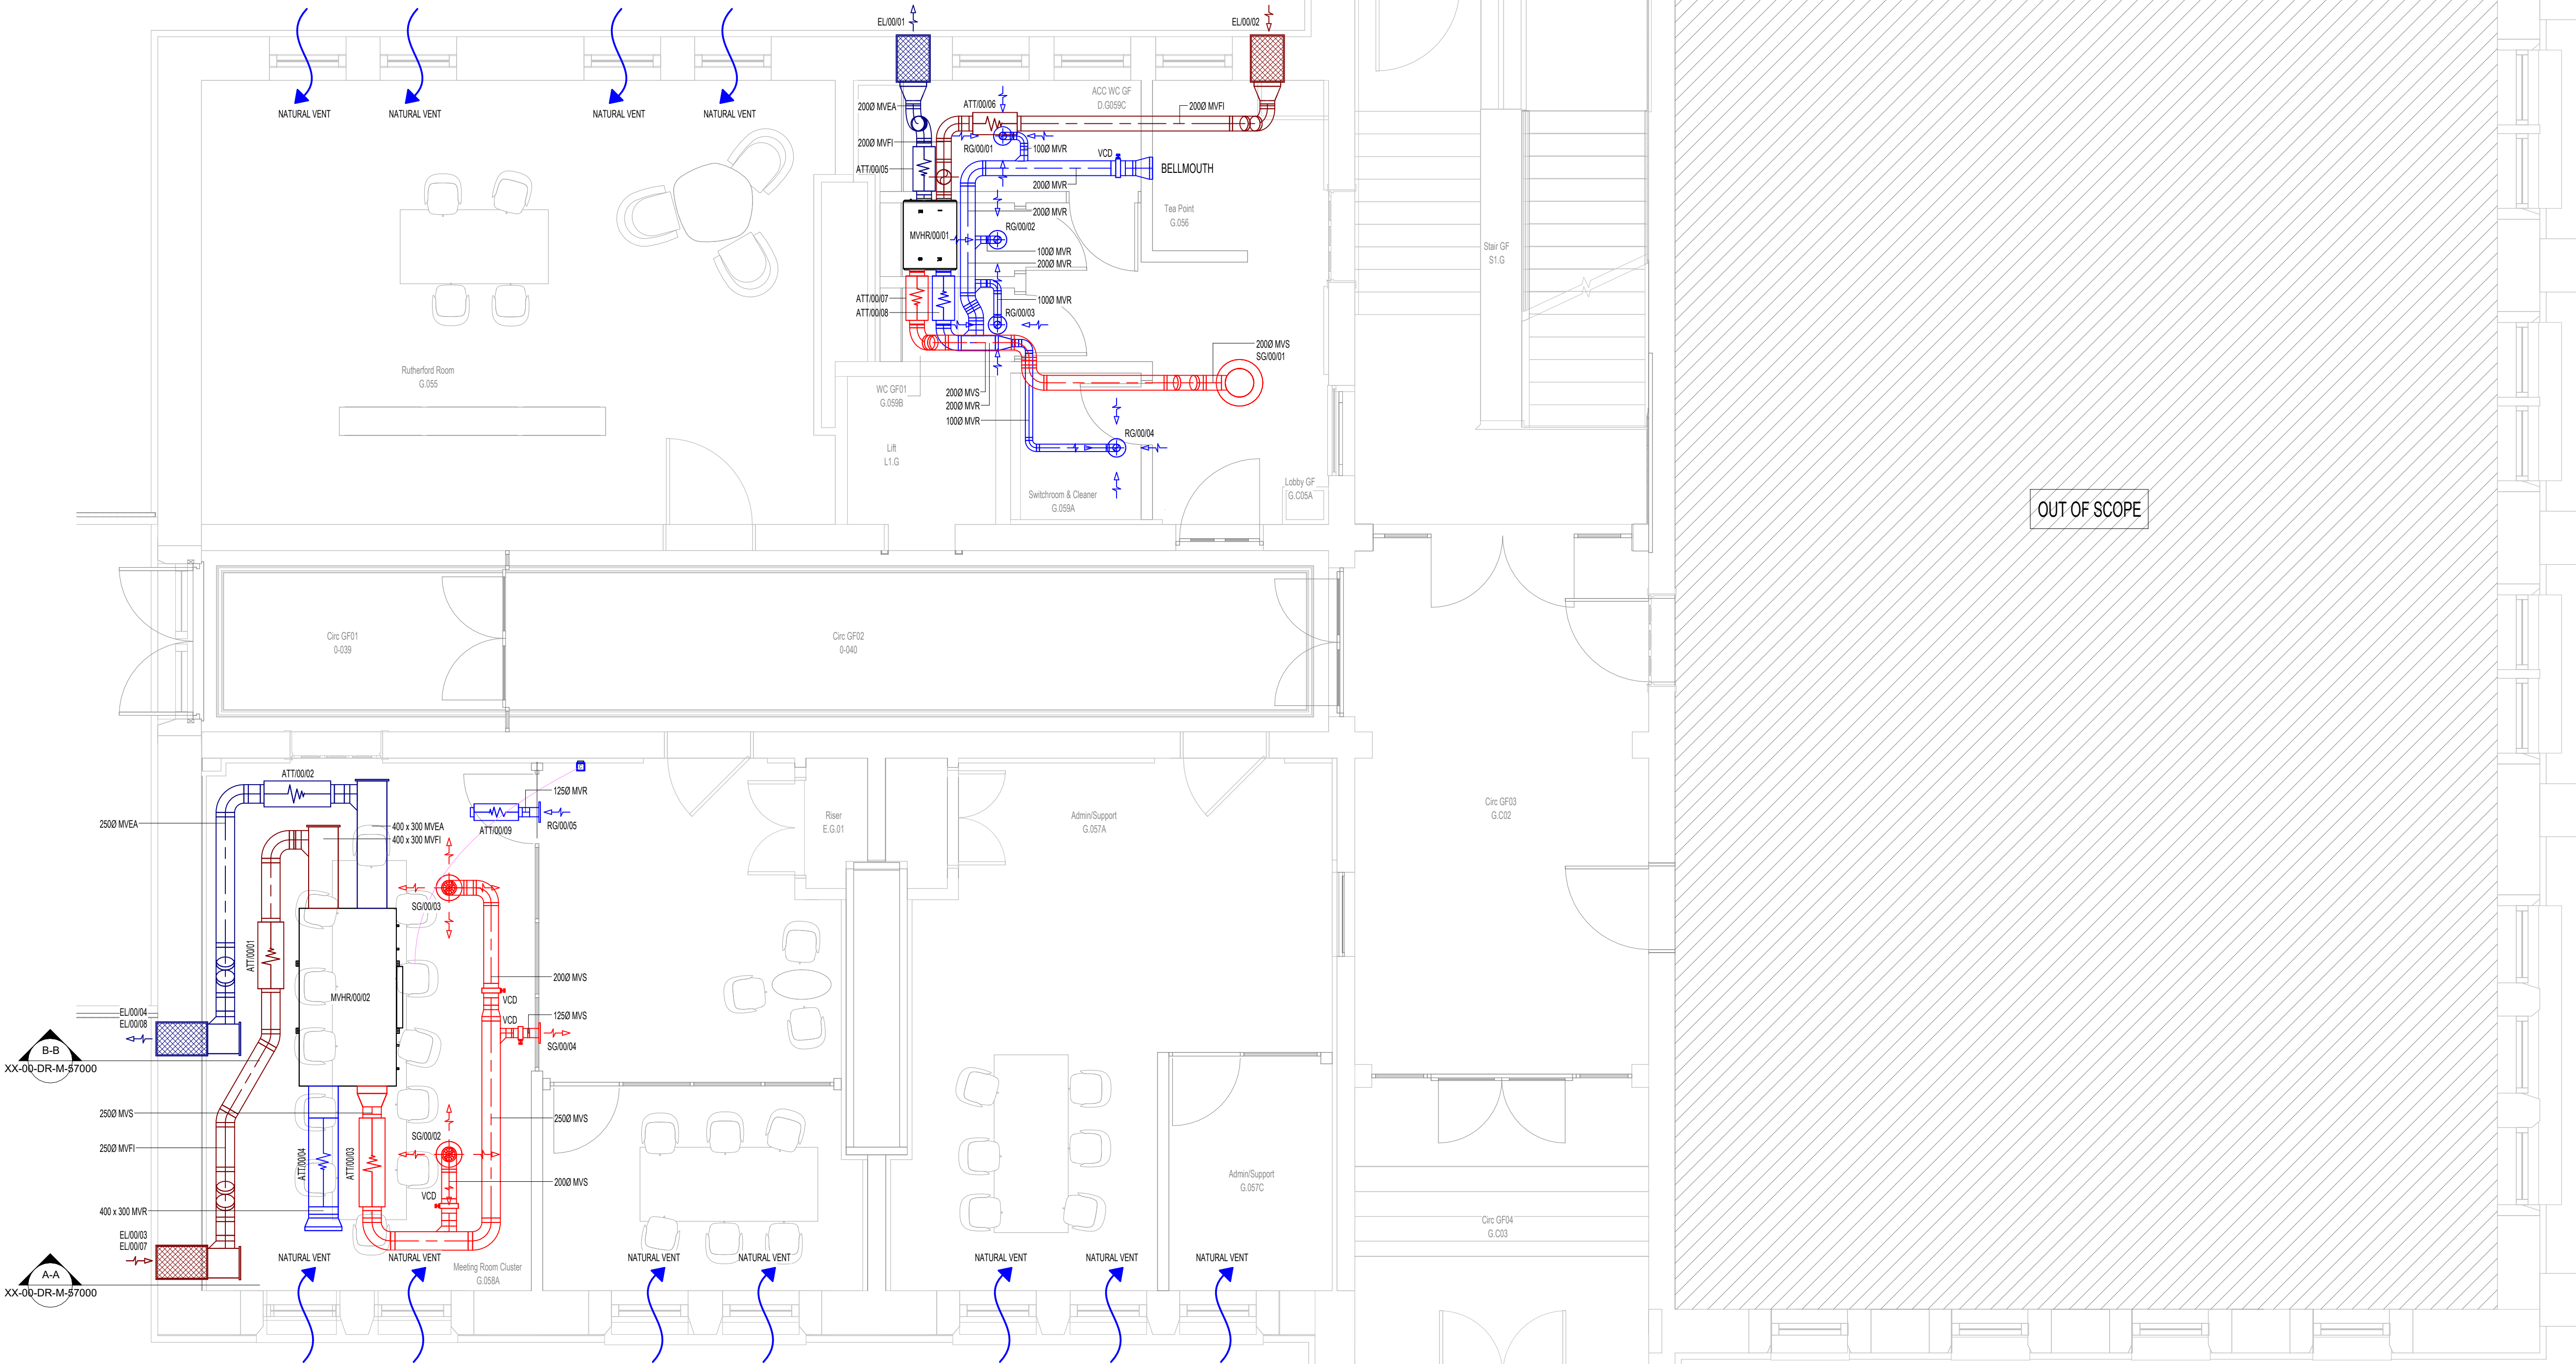

NOTES:
THIS IS A DESIGN DRAWING NOT AN INSTALLATION DRAWING.
DIMENSIONS SHOULD NOT BE SCALED.
SITE DIMENSIONS TO BE CHECKED BEFORE PRODUCTION OF CRITICAL MANUFACTURING DRAWINGS.
THE DRAWING IS COPYRIGHT AND NO PART MAY BE REPRODUCED WITHOUT WRITTEN CONSENT.

- LEGEND:
- | | |
|------|---------------------------|
| MVE | EXTRACT DUCTWORK |
| MVEA | EXHAUST AIR DUCTWORK |
| MVFI | FRESH AIR INTAKE DUCTWORK |
| MVS | SUPPLY DUCTWORK |
| MVR | RETURN DUCTWORK |

- DUCT SYSTEM ABBREVIATIONS
- | | |
|------|---|
| EG | EXTRACT GRILLE |
| RG | RETURN GRILLE |
| SD | SUPPLY DIFFUSER |
| SD | SUPPLY SWIRL DIFFUSER |
| B | BELL MOUTH |
| ATT | ATTENUATOR |
| CTA | CROSS TALK ATTENUATOR |
| FD | FIRE DAMPER |
| FSD | FIRE-SMOKE DAMPER |
| FCU | FAN COIL UNIT |
| MYHR | HEAT RECOVERY UNIT |
| VCD | VOLUME CONTROL DAMPER |
| MVFI | MECHANICAL VENTILATION FRESH AIR INTAKE |
| MVEA | MECHANICAL VENTILATION EXTRACT AIR |
| MVE | MECHANICAL VENTILATION EXTRACT |
| C | WALL MOUNTED CONTROLLER |

Rev C02	STAGE 4 ISSUE - MCC COMMENTS INCORPORATED
By:	JD Chkd: JFH Date: 06.12.24 App: JCF

Rev C01	STAGE 4 CONTRACT ISSUE
By:	JN Chkd: JFH Date: 16.08.24 App: JCF

Status A4	Description STAGE 4A COMPLETED	Stage 4
--------------	-----------------------------------	------------

Client

MANCHESTER
1824
The University of Manchester

Project

UNIVERSITY OF MANCHESTER RUTHERFORD BUILDING

Drawing

MECHANICAL SERVICES
VENTILATION
GROUND FLOOR
GENERAL ARRANGEMENT LAYOUT

CAD21 LTD
BUILDING
SERVICES
& ENERGY
CONSULTING ENGINEERS

NEWCASTLE ■ TEESSIDE ■ YORKSHIRE ■ NORTH WEST

Drawing Number UOMRB-CAD-XX-00-DR-M-57000	Revision C02
--	-----------------

Scale As indicated	Size A1
-----------------------	------------

Drawing Origins :

RBUM-IBI-XX-XX-M3-A-000002 Rev 241108