




Denotes EOI Boundary

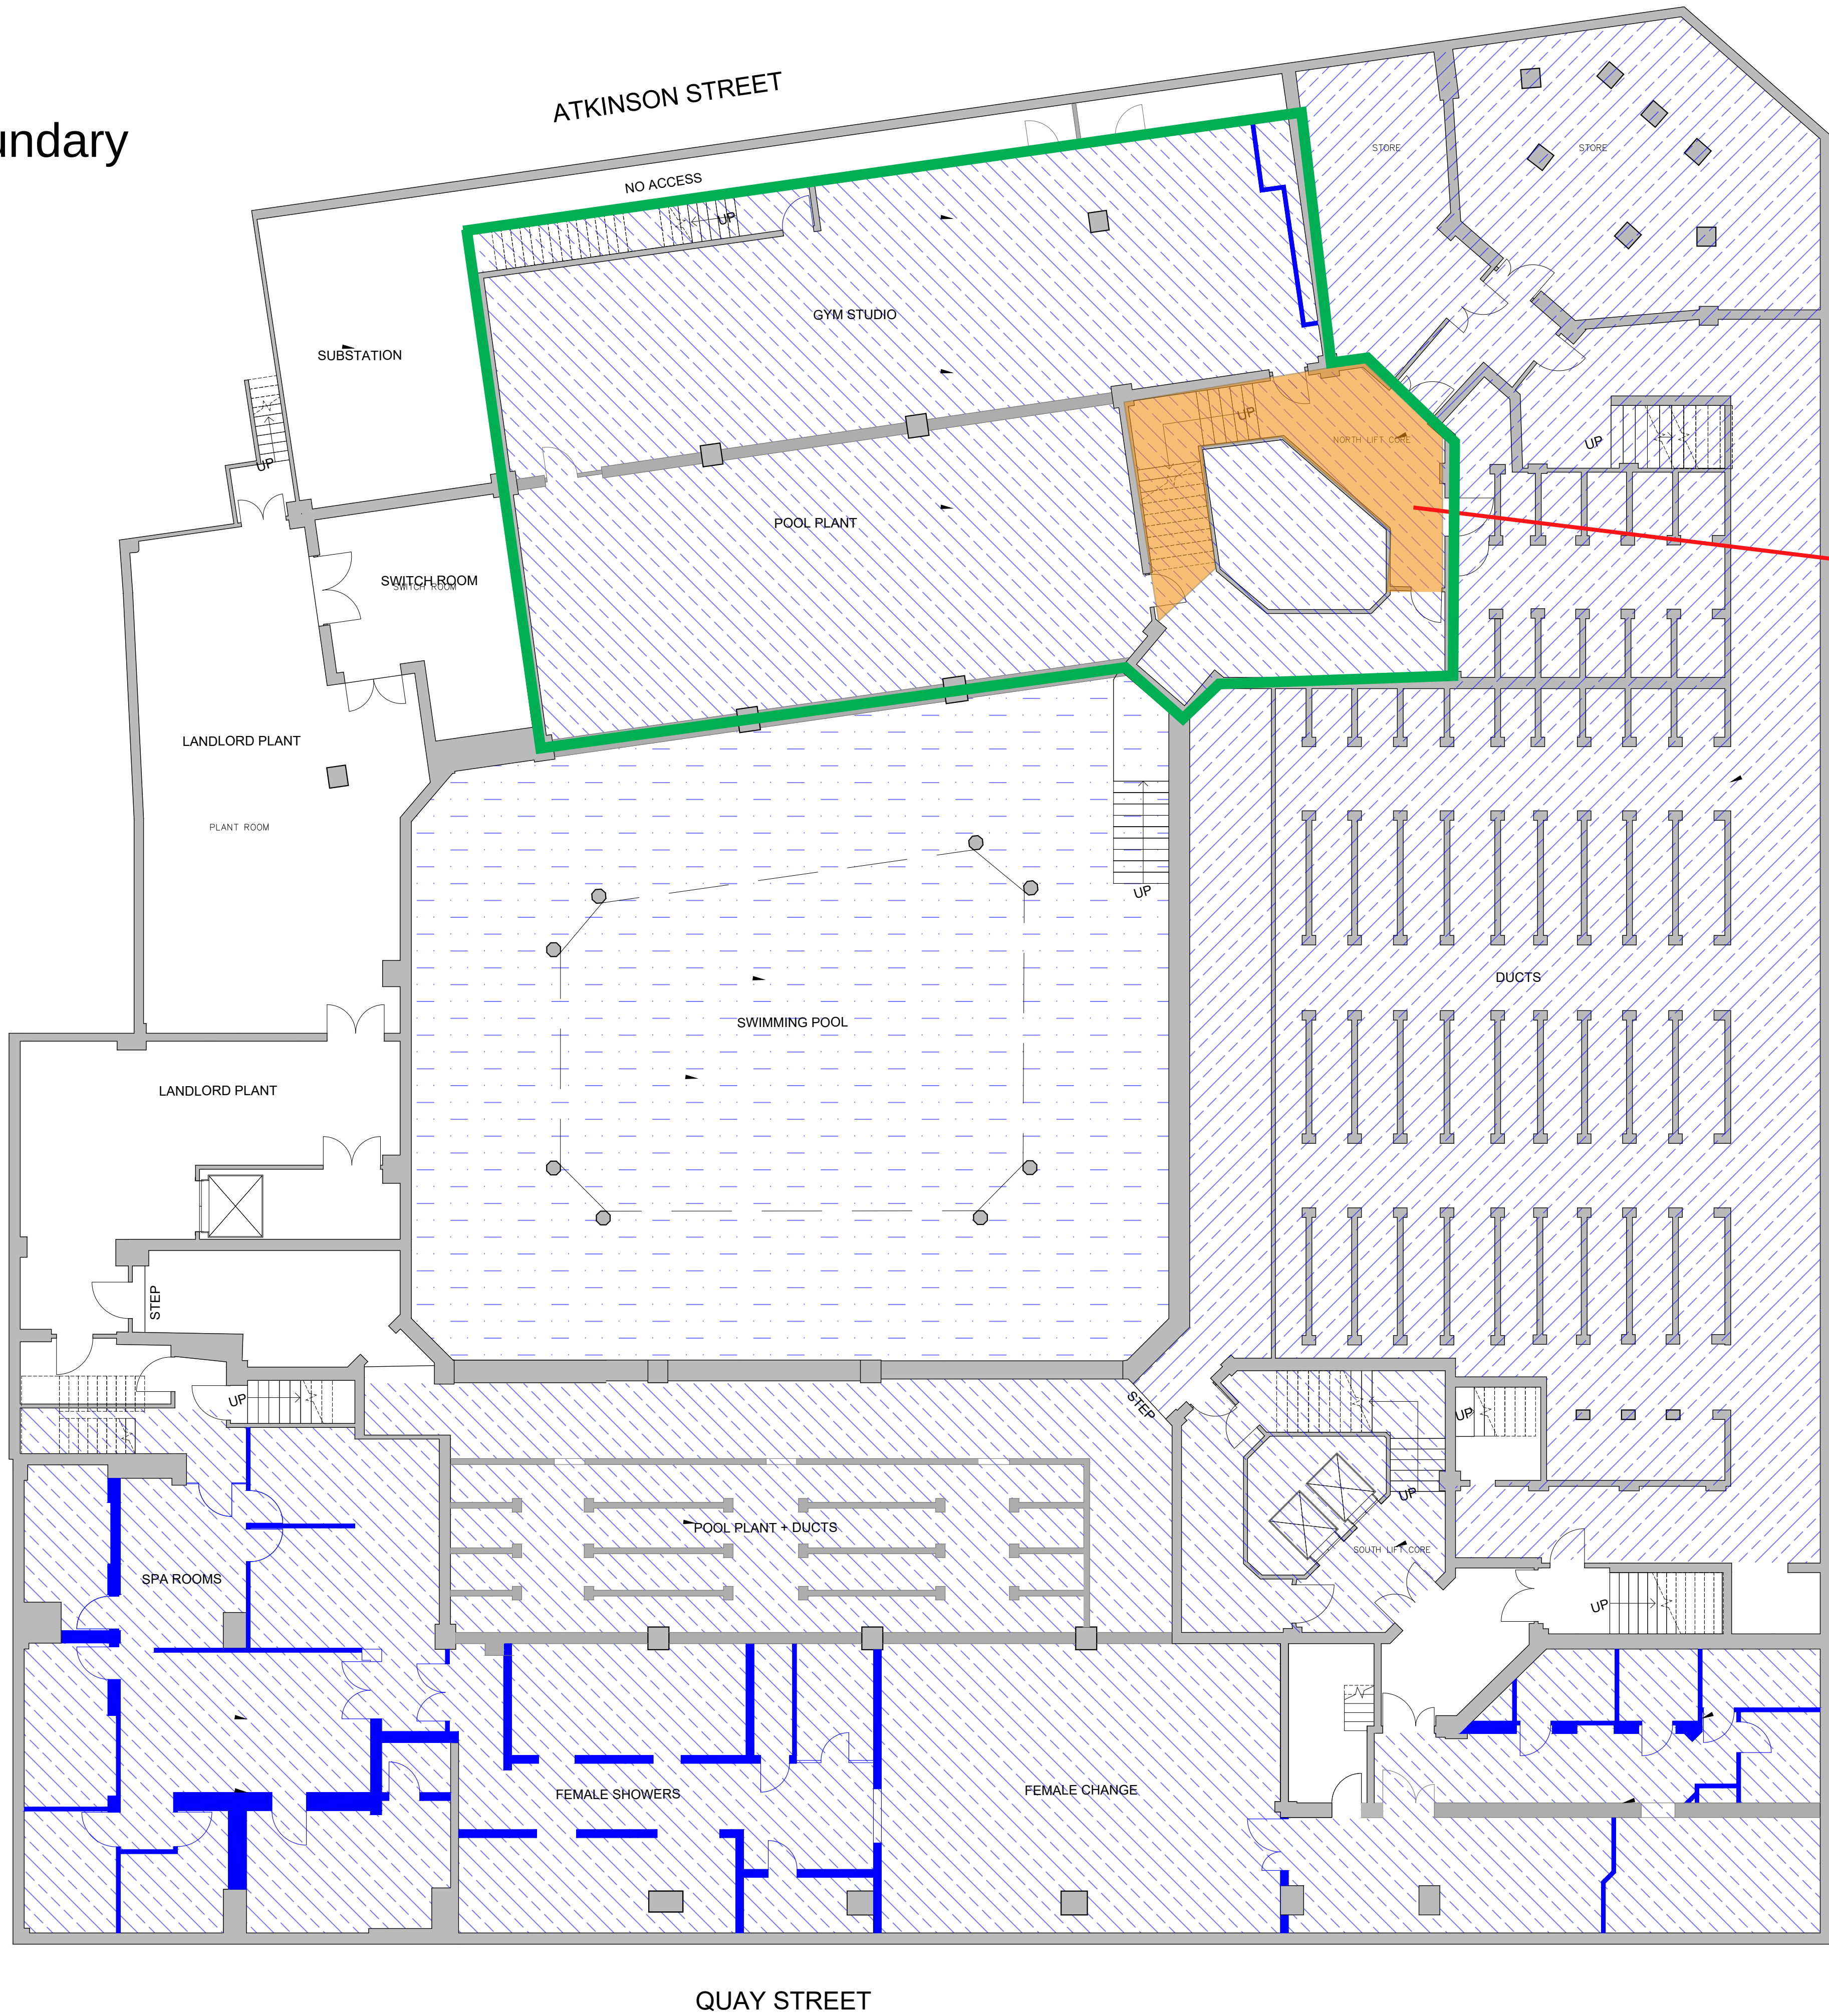

ANOMALY

- General notes
- This information is confidential and the copyright of Anomaly.
 - Anomaly accepts no liability for use of this drawing by parties other than the party for whom it was prepared or for purposes other than that which is stated on the issue sheet. It shall not be disclosed or passed to any other party in any form in whole or part without Anomaly's express permission in writing nor should any other party place reliance upon it.
 - Where data is supplied electronically, it is for convenience only. The original information is the printed or controlled copy which will be supplied on request.
 - All dimensions are in millimetres. No dimensions or other information shall be inferred from the electronic data unless specifically stated on the printed or controlled copy. Where dimensions are not given, drawings must not be scaled and the matter should be referred back to Anomaly.
 - This drawing should be read in conjunction with all other project information, produced by Anomaly and others. In the event of any conflict between the information contained on this drawing and in any other project document, drawings, specifications, schedules etc. the matter must be referred back to Anomaly for clarification.
 - All dimensions and conditions are to be checked on site by the contractor prior to preparing designs, drawings, calculations etc. or commencing any work. The contractor is responsible for checking that there is no conflict between site dimensions and drawn dimensions.

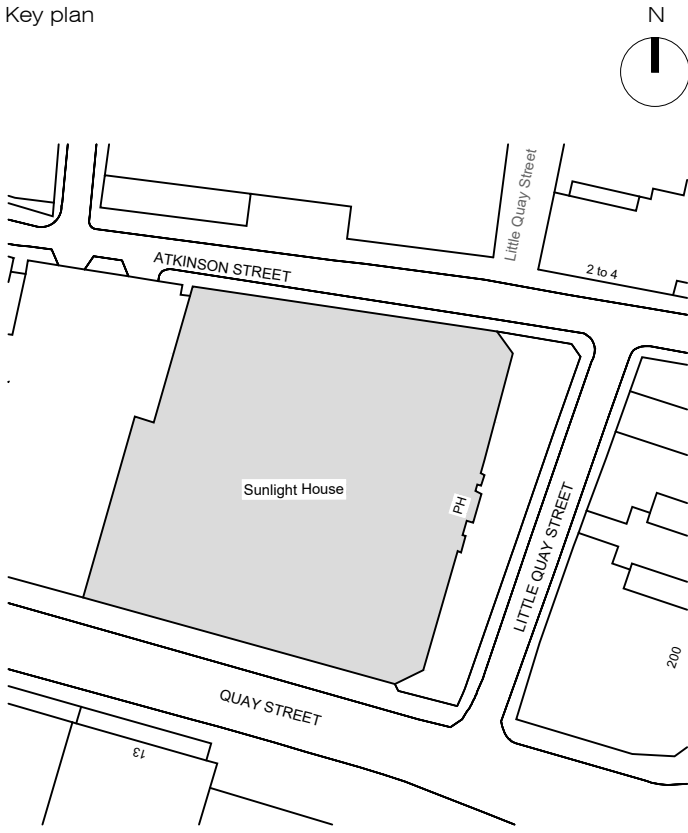

- Drawing key
- Removal of non original internal partitions. All internal doorsets to be removed. When in doubt refer to architect and planning consultant.
 - Removal and drainage of the swimming pool. Refer to MEP and structural engineers consultant for further information.
 - Non original flooring to be removed including any subfloor, taken back to the original. Spaces back to original fabric, removal of all decorative finishes and materials; all tenant fitout items including loose and fixed furniture, gym and other equipment. All lighting and radiator systems to be removed, refer to MEP strip out scope. All non-original ceiling details, acoustic panels, dropped soffits, lighting to be carefully removed. Existing bulkheads to be removed with all associated pipeworks and units, refer to MEP specification for more details, services to be capped as required.

- Note:
- All external fabric and window systems to remain untouched
 - Retain key heritage elements: coffered ceiling and parquet, flooring to be retained. Where fittings are removed, ensure minimal fabric impact.
 - Columns to remain untouched
 - All external wall linings and corner stone-clad entrance to remain
 - All historical coffer details to remain.

Contractor to review fire curtain and guard rails to be retained where present.

Any demolition work or alteration of the original fabric is subject to planning and listed building consent.

S2	P01	24/05/2024	Soft strip
Status	Revision	Date	Description

JW	AM	AM
Drawn by	Checked by	Approved by

Architect
ANOMALY
Morelands, 5-23 Old Street
London EC1 V9HL
+44 (0) 20 7054 1145
hello@anomaly.london
www.anomaly.london

Client
Karrev (Sunlight) Ltd.

Project
SUNLIGHT HOUSE
Little Quay St,
Manchester M3 3HP

Drawing title
**HERITAGE SURVEY
BASEMENT LEVEL**

Job number	Sheet size	Scale @ A1	Scale @ A3
126	A1	1:100	1:200

Project stage
PHASE 2 - SOFT STRIP

Drawing number
SLH-ANO-B0-B1-DR-A-0300B