



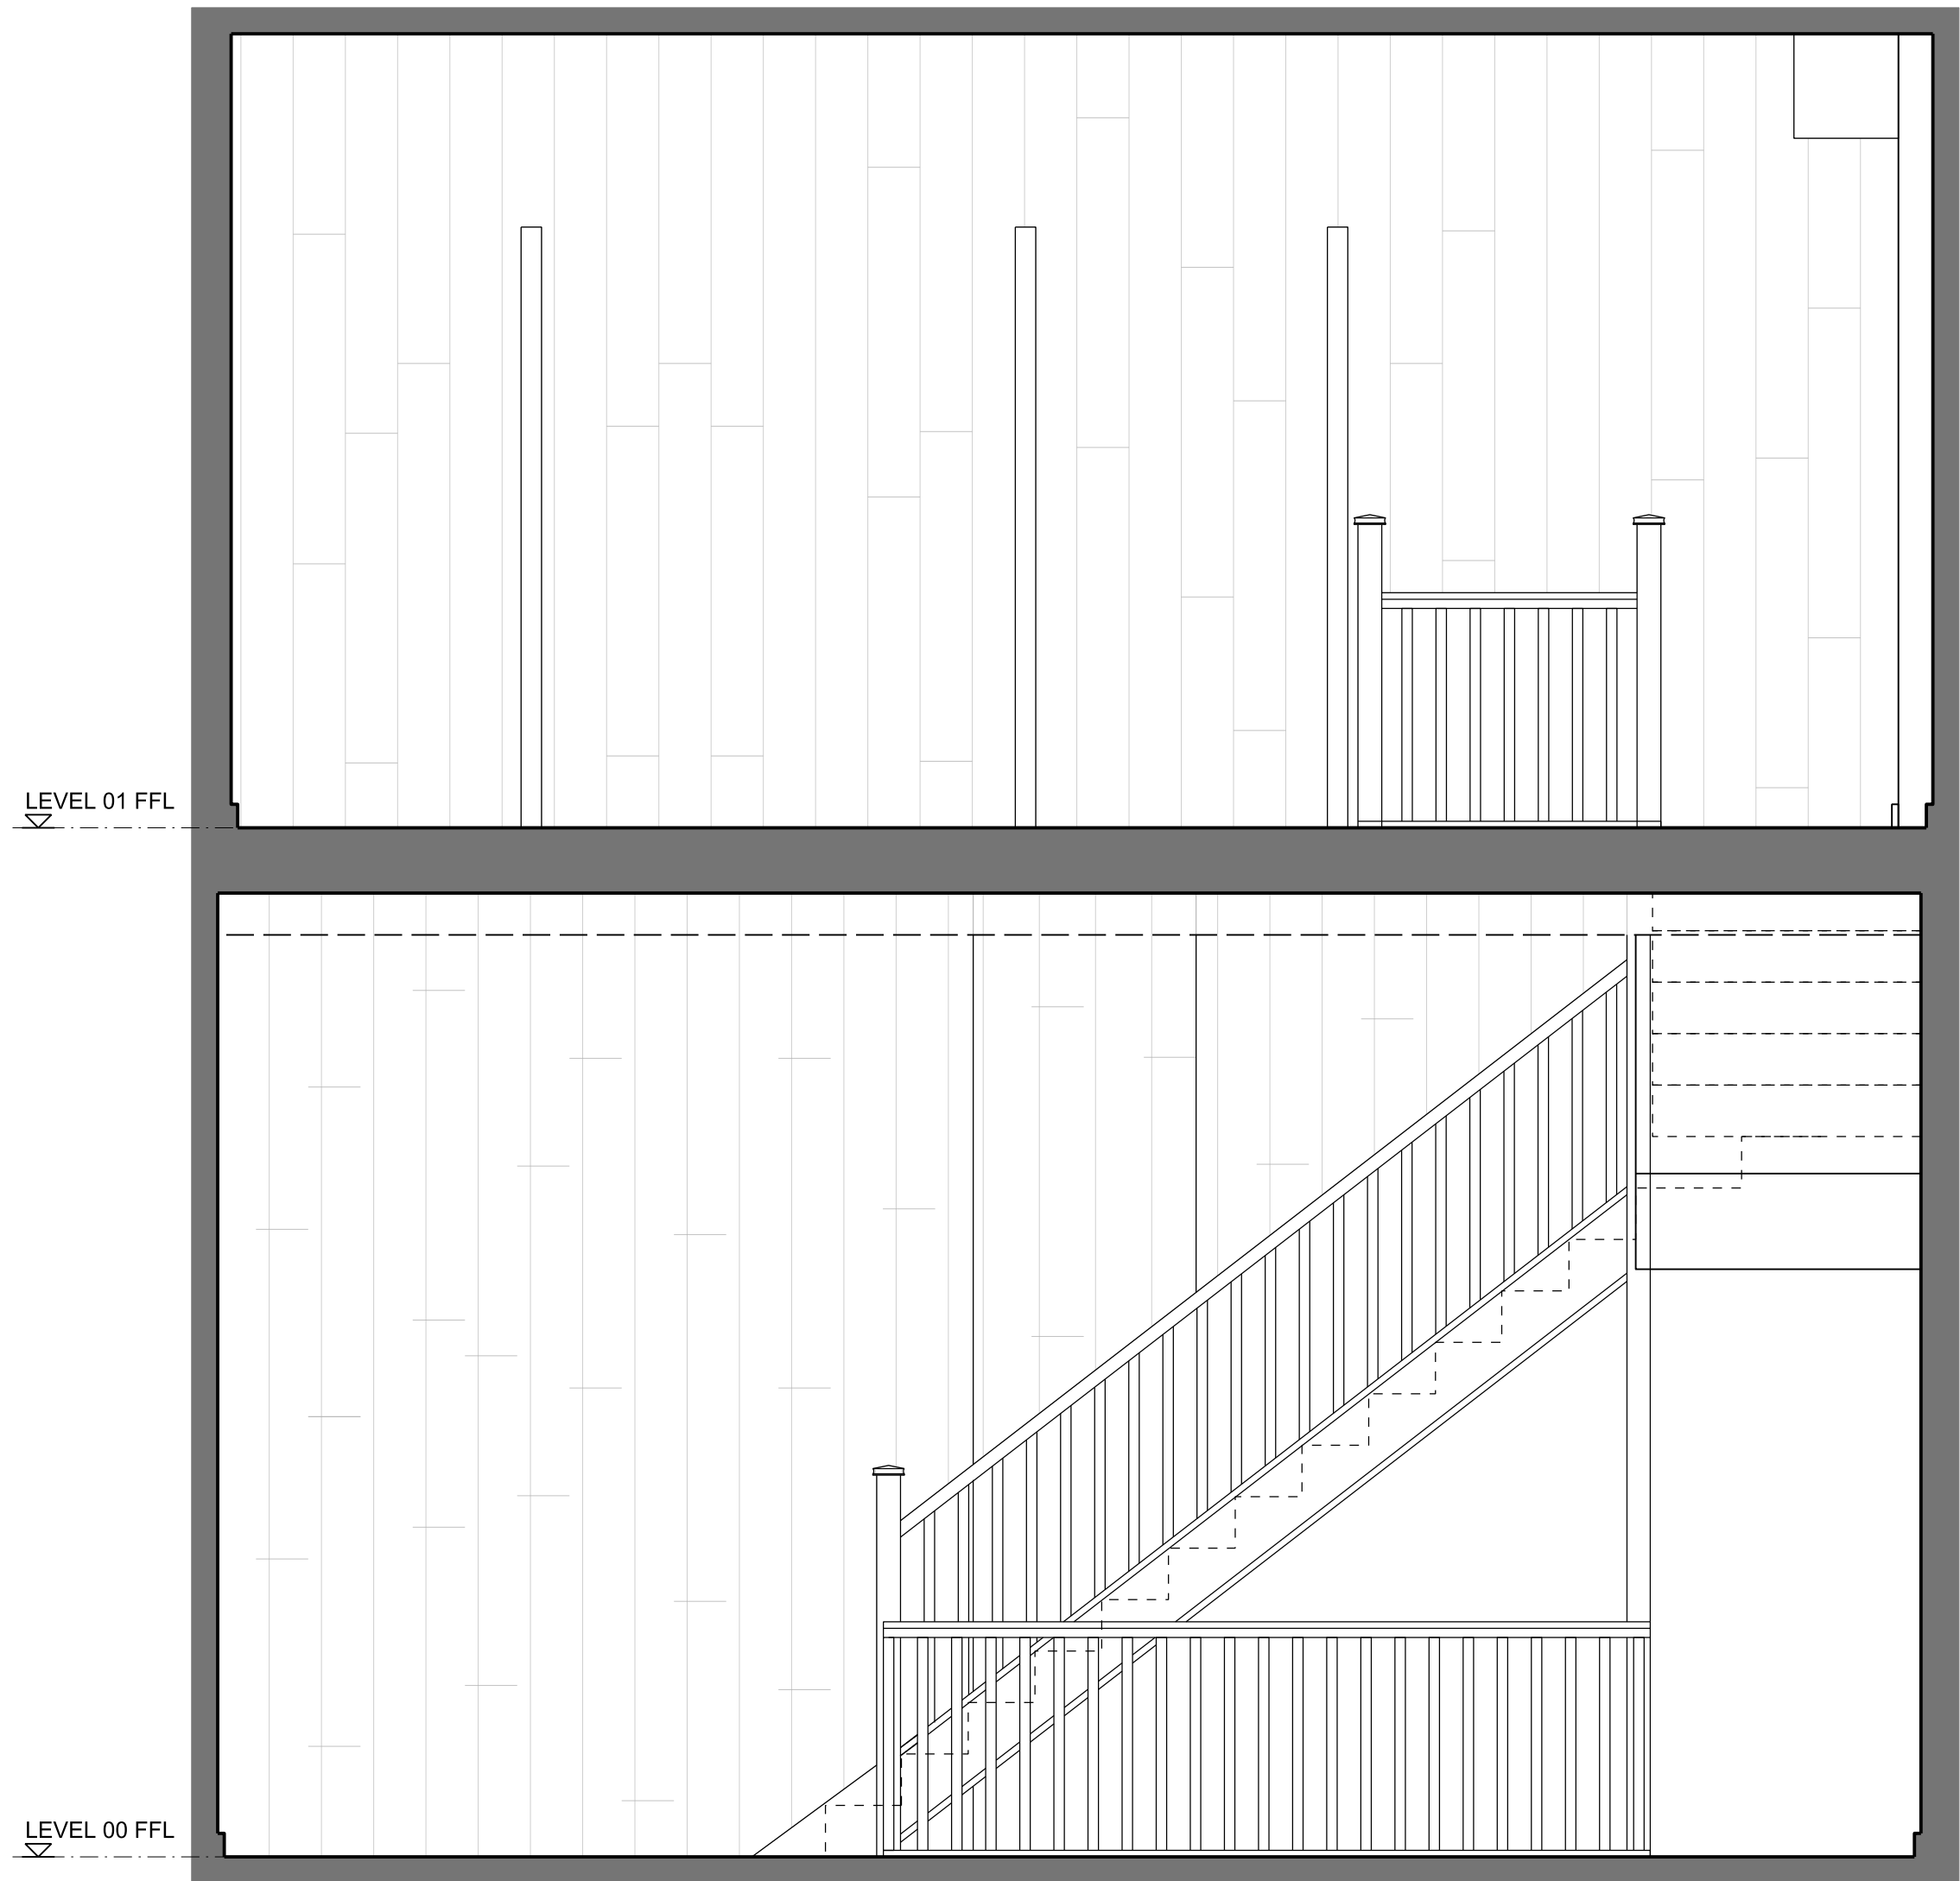


01 EXISTING ELEVATION A-A
1:25

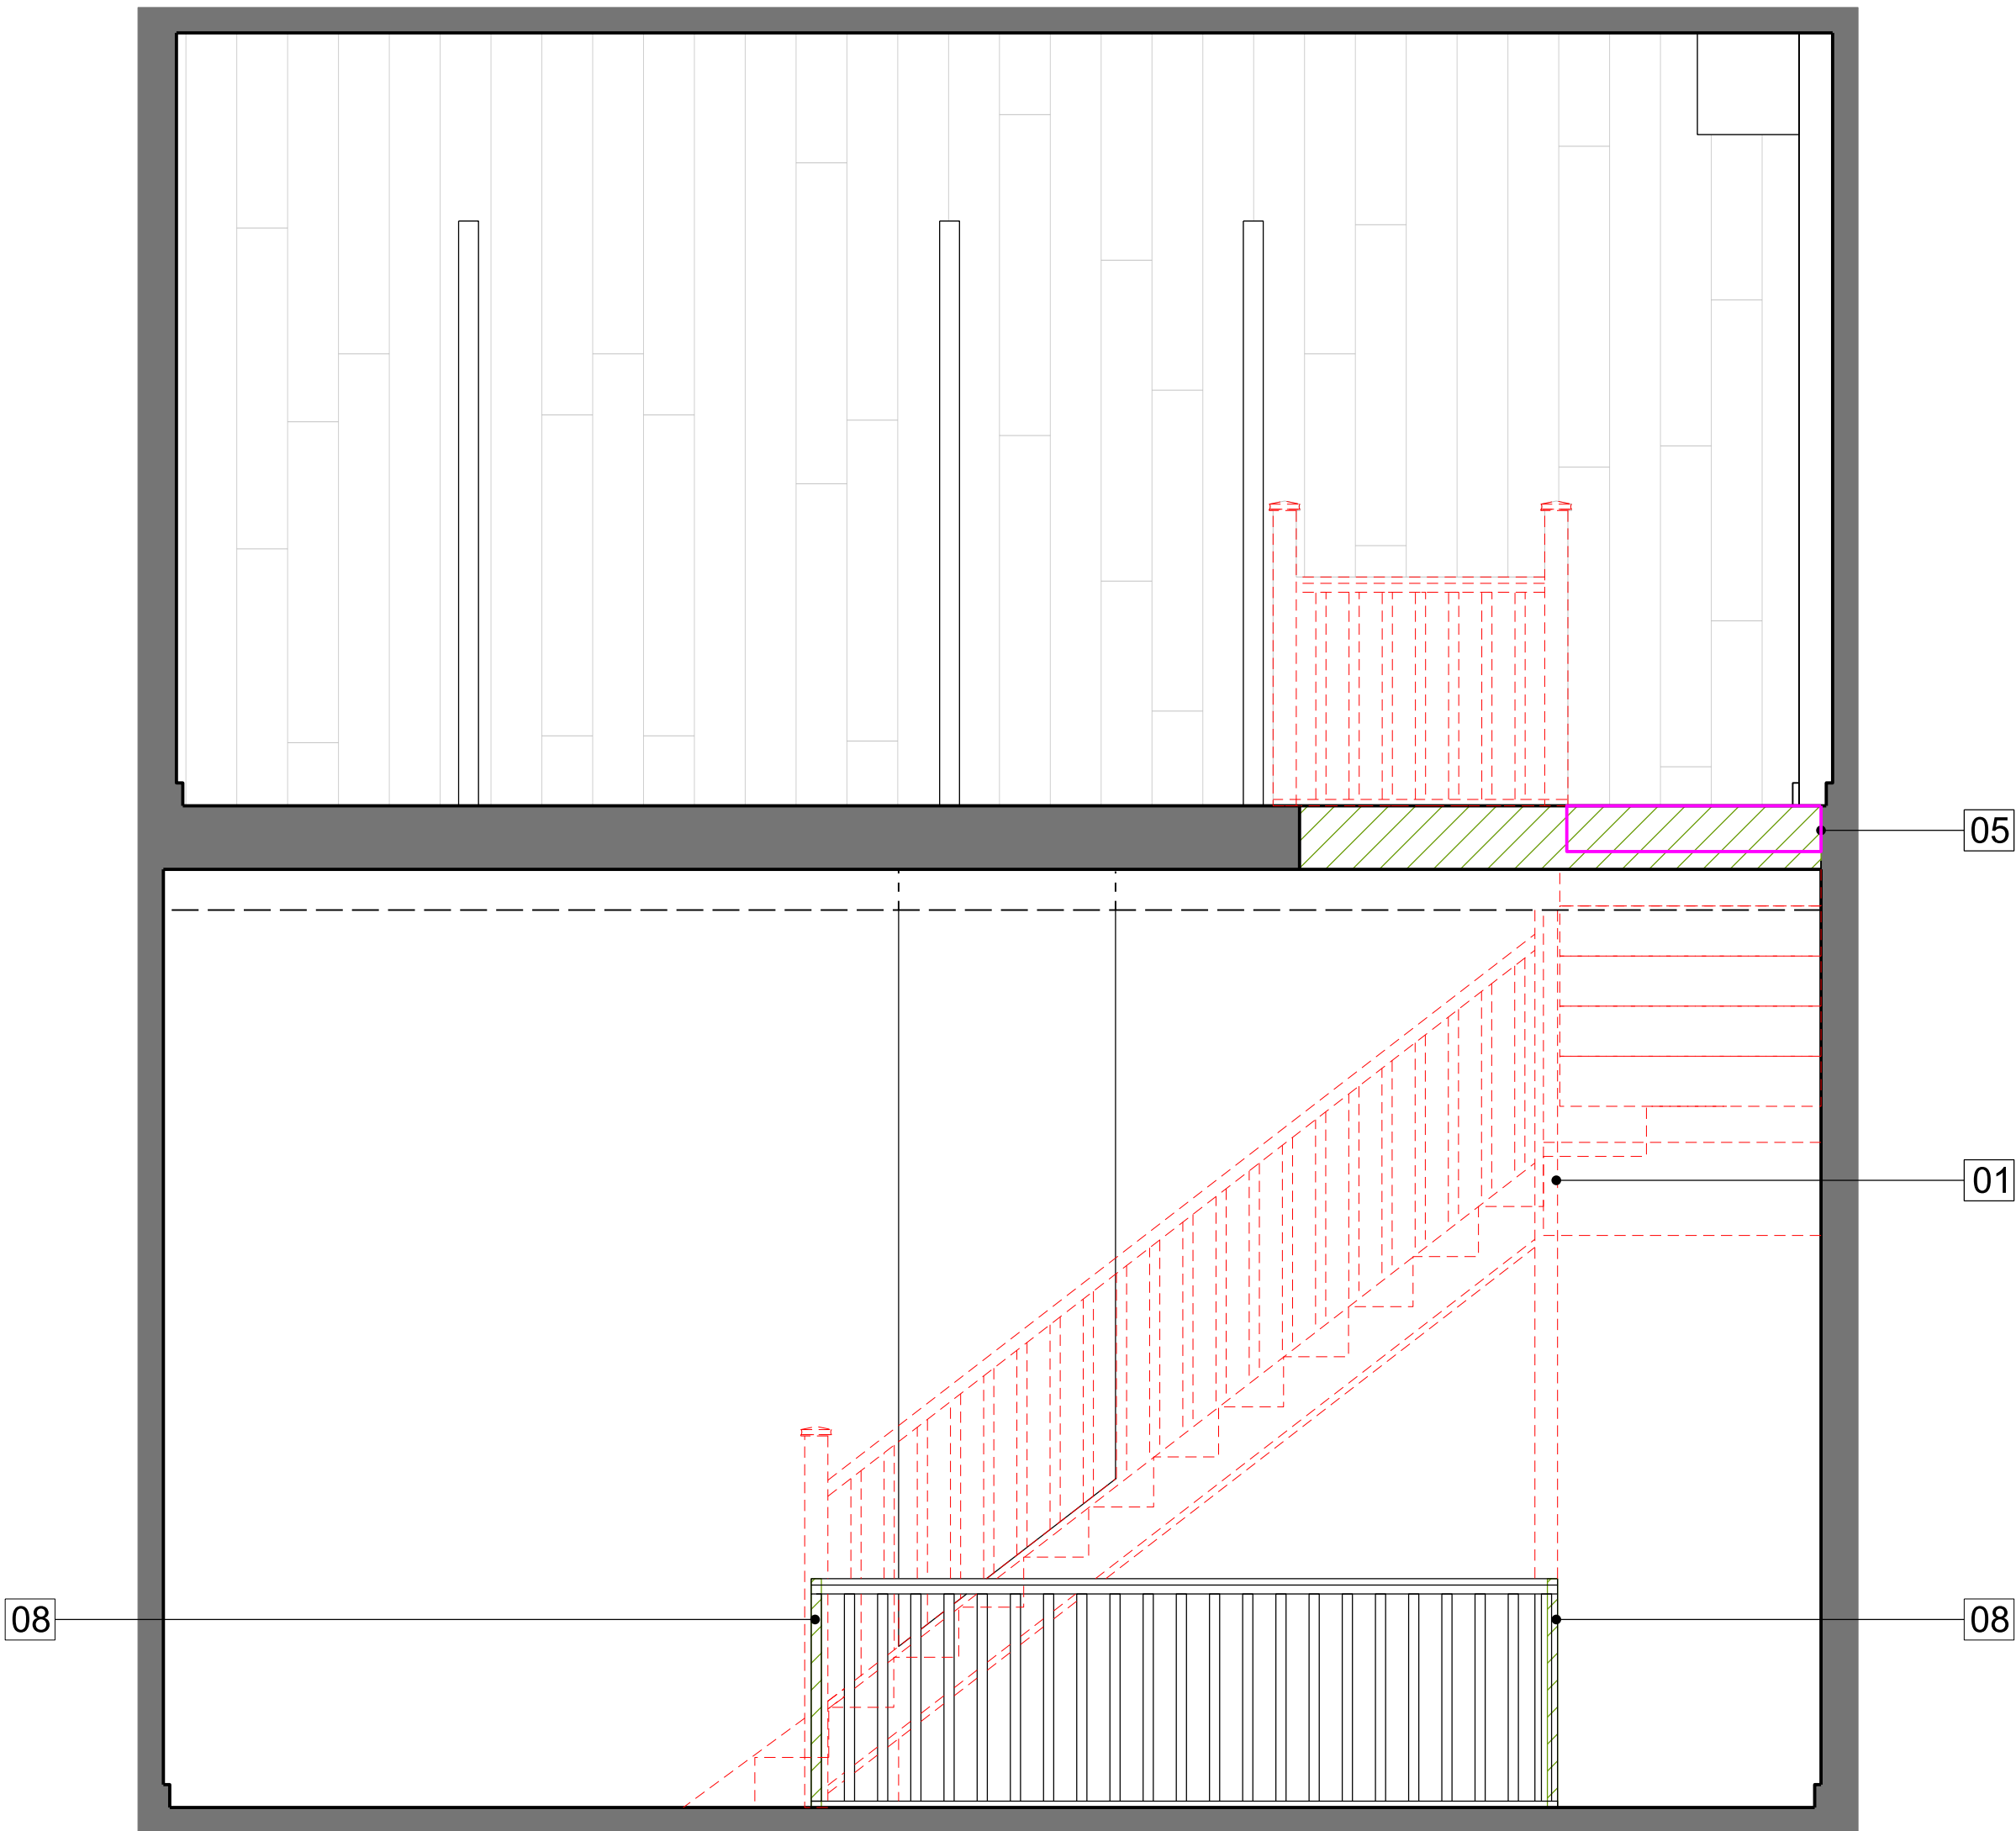

02 PROPOSED ELEVATION A-A
1:25

- KEY:
- NON-ORIGINAL FABRIC REMOVED AND FIXING HOLES INTO ORIGINAL FABRIC AND STRUCTURE TO BE MADE GOOD
 - ORIGINAL FABRIC REMOVED AND FIXING HOLES INTO ORIGINAL FABRIC AND STRUCTURE TO BE MADE GOOD
 - OTHER ALTERATIONS
 - WALL HIDDEN IN VIEW FOR CLARITY
 - NEW ACCESS HATCH - SIZE INDICATIVE ONLY
 - NOTE: SIZE AND POSITION OF ACCESS HATCH SUBJECT TO REVIEW OF ACCESS AND MAINTENANCE STRATEGY
 - 01 NON-ORIGINAL STAIRCASE, BALUSTRADE/ RAILING TO BE REMOVED. ALL FIXING HOLES INTO ORIGINAL FABRIC AND STRCUTURE TO BE MADE GOOD
 - 02 NON-ORIGINAL INTERIOR PARTITIONS TO BE REMOVED
 - 03 NON-ORIGINAL INFILL BOARDING TO BE REMOVED
 - 04 NEW TIMBER JOIST FLOOR STRUCTURE TO INFILL STAIR OPENING. NEW FLOOR AND CEILING FINISHES TO BE PROVIDED.
 - 05 NEW LADDER ACCESS HATCH TO BE PROVIDED WITHIN NON-ORIGINAL OPENING
 - 07 NEW GLAZED BALUSTRADE
 - 08 NEW TIMBER BALUSTRADE
 - 09 NEW DRYLINING PARTITION

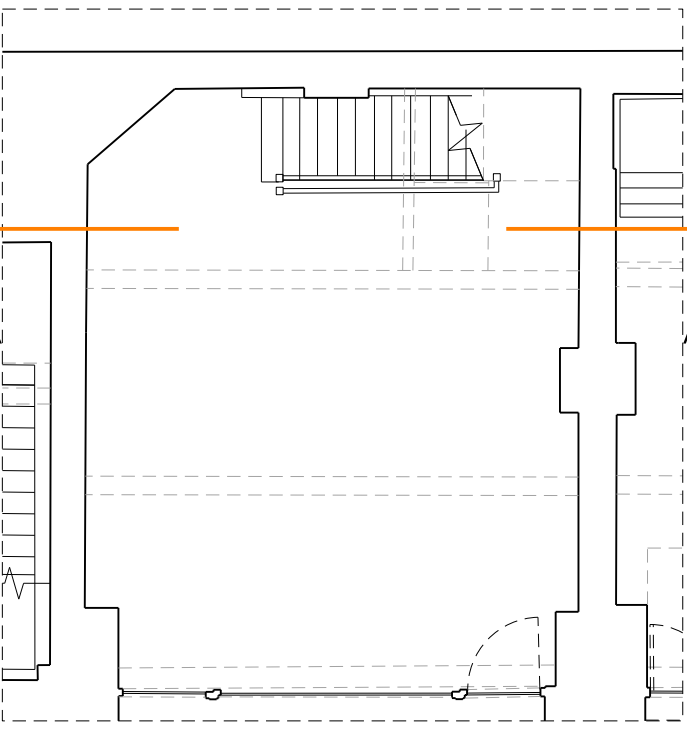

CAD information based on third party SEP survey issued by landlord and received 04-08-17

This drawing should not be used for setting out for construction.