

© this drawing and the building works depicted are the copyright of **idp** and may not be reproduced or amended except by written permission. no liability will be accepted for amendments made by other persons.


all dimensions to be checked on site and architect notified of any discrepancies prior to commencement.
do not scale.

notes:


Existing Elevations derived from TFT Layout ref: TAH TFT D XX DR G 004.
All existing window locations, door locations and heights taken from layout, TBC on site if required.




Exisitng/Proposed Courtyard NW Elevation
c/w Staircase 02

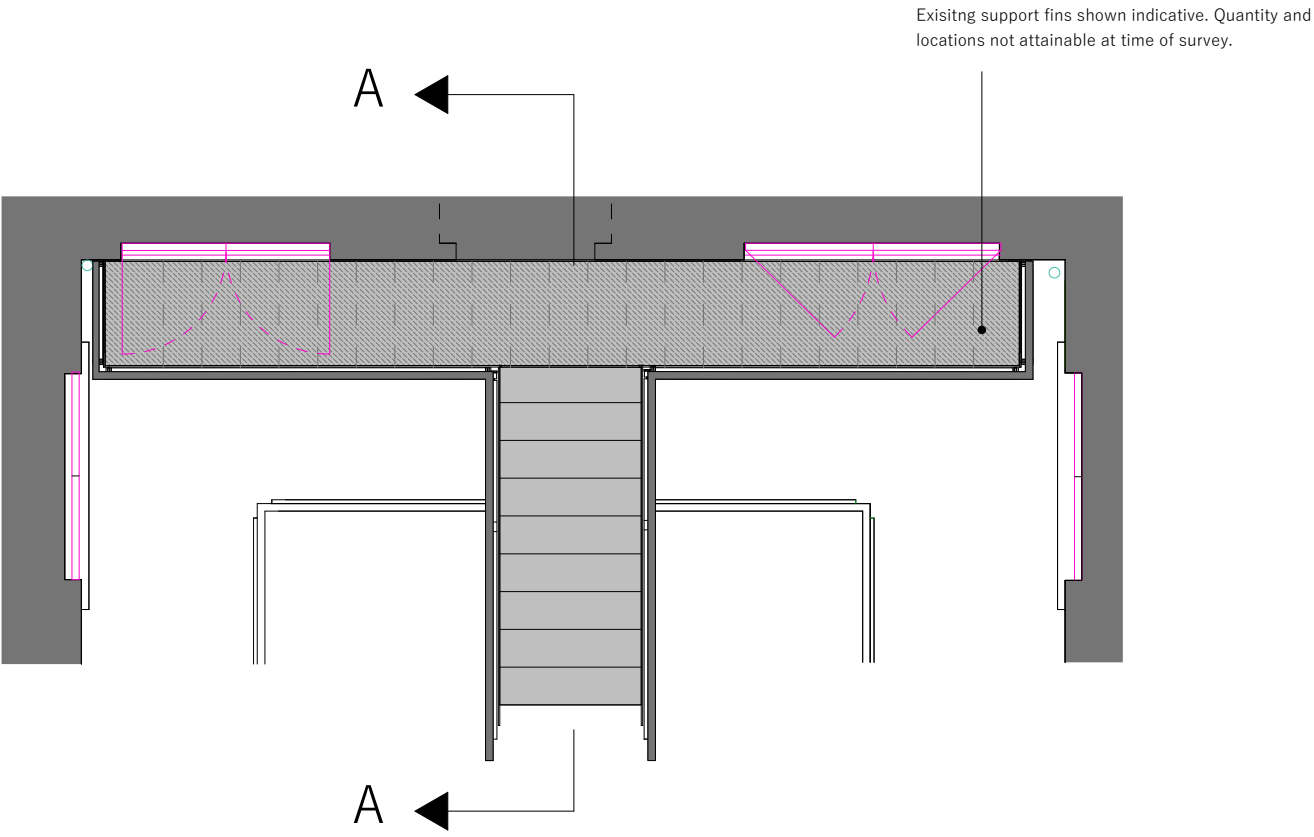

Proposed Courtyard Plan Section
c/w Staircase 02

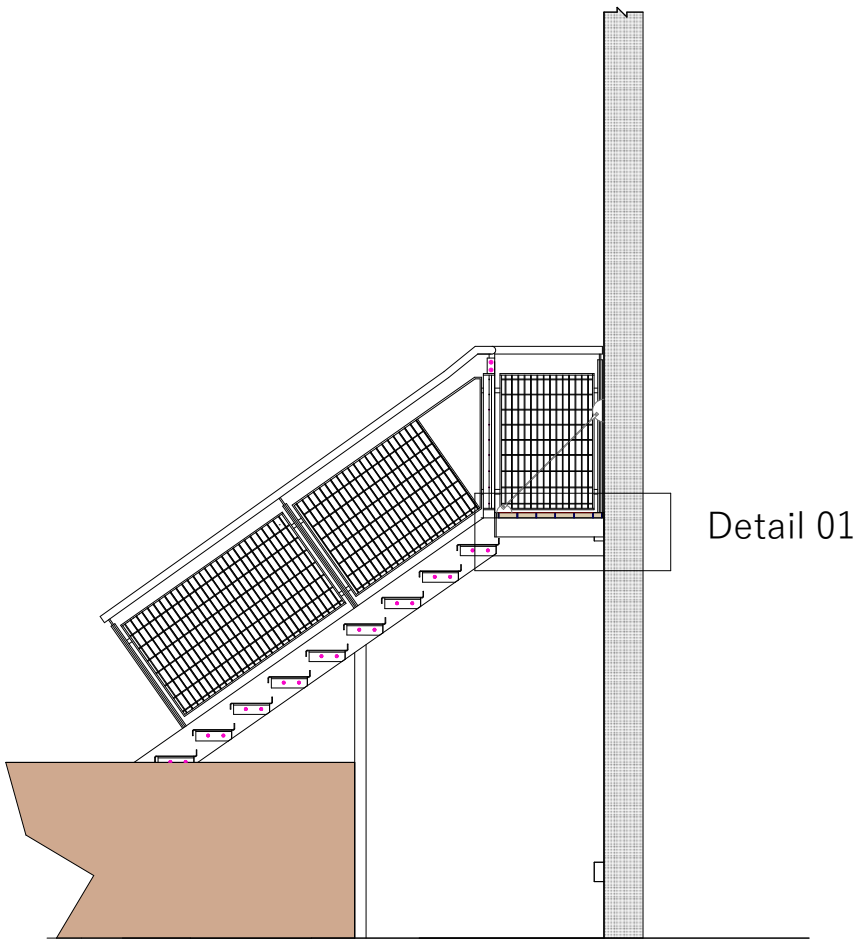


Section A-A
(Existing Staircase 01)

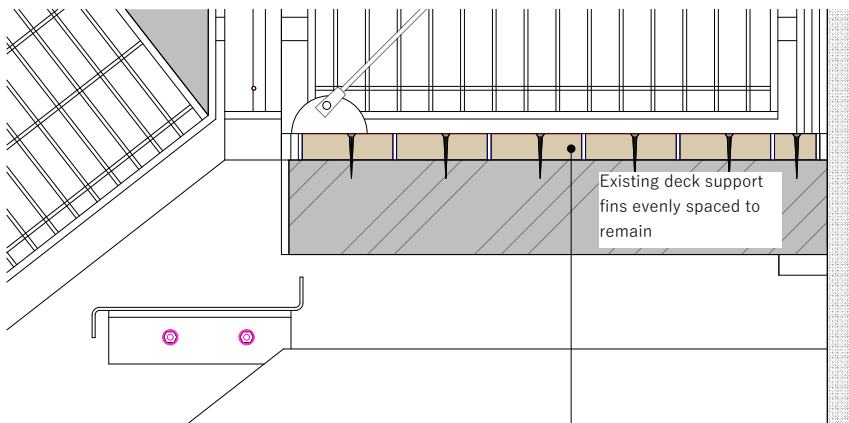

Detail 01 - Existing

Timber deck to be removed and replaced with evenly spaced aluminium, square hollow sections, mechanically fastened or welded (to manufacturer confirmation) with aluminium checker plate sheeting above, mechanically fastened to sections below. Mechanical fastenings to be countersunk. Surface drainage holes to be provided in coordination with RHS sections below. SHS section and checker plate sheet dims to be confirmed on site prior to procurement or installation upon removal of timber deck.

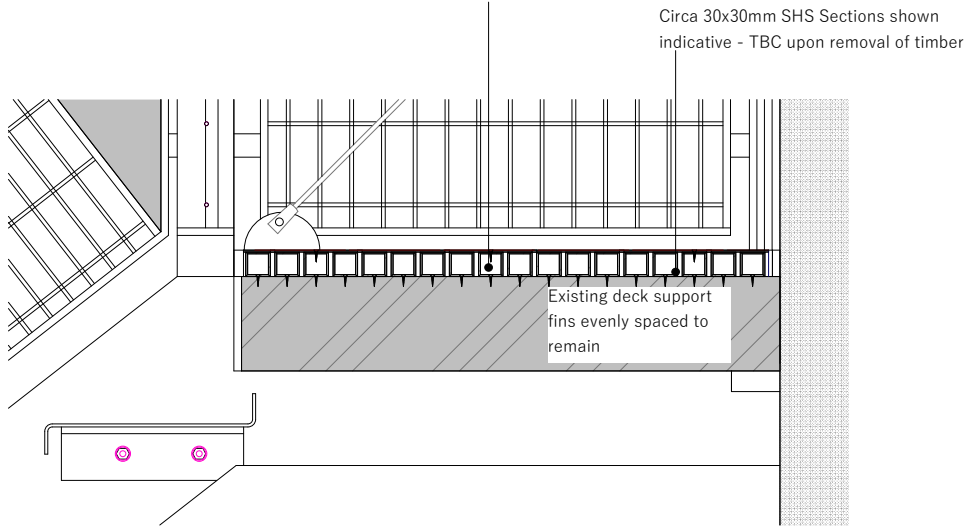

Detail 01 - Proposed

rev: date: comment(s): name: check:



ARCHITECTS.

URBAN DESIGNERS.

PLANNERS.

PROJECT MANAGERS.

LANDSCAPE ARCHITECTS.

WE ARE IDP.

status: **PLANNING** RIBA Stage: **3**

client: **Tuffin Ferraby Taylor (TFT)**

job: **Arthouse Manchester**

title: **Staircase 02 - Proposed Refurbishment**

drawn: **CDS** date: **January 2025**

checked: **JJH** scale @ a2: **1:50**

job no: **C6095** drg no: **011 Rev #**

IDP GROUP 27 SPON STREET COVENTRY CV1 3BA
T: **+44 (0)24 7652 7600** E: info@idpgroup.com
www.weareidp.com