

Victoria Baths – Fire Precaution Works (Dated - 08/08/2023)


Six Electric Cupboards



Specification

Six electric distribution boards to be enclosed with a 50mm x 50mm softwood timber frames, to be treated with Thermoguard Fire Retardant Paint and lined with 9mm Promat Supalux boards, with the construction of two cupboard doors, fitted with stainless steel hinges and a cupboard lock.

Basement - Fire Stopping Works

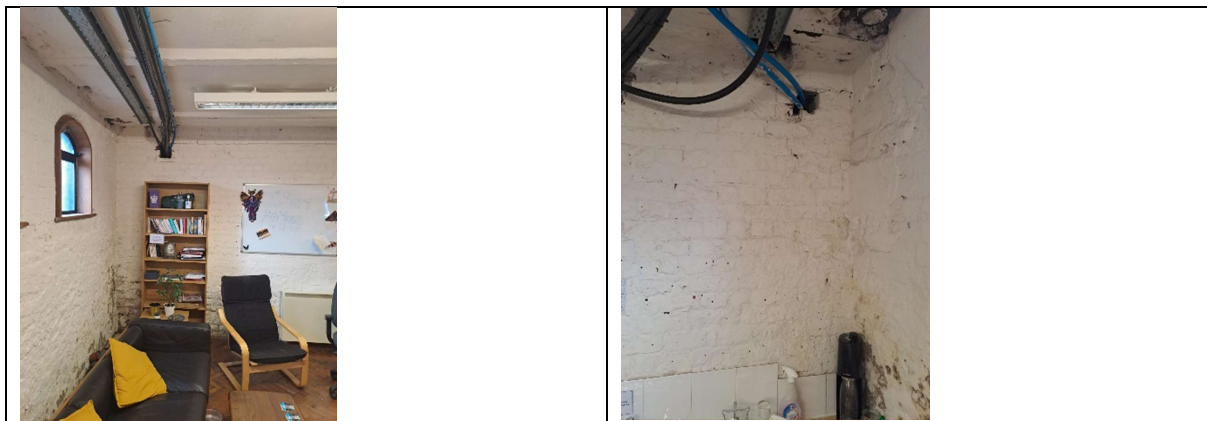

--	--

Apply B2 Gun Grade Fire Foam (as per attached Sika Product Data Sheet), or Mulcol Multiform 2k to 40 no brickwork service protrusions (circa 200mm x 200mm - examples as aforementioned two photographs) to be neatly trimmed around service pipework and brickwork facades.