
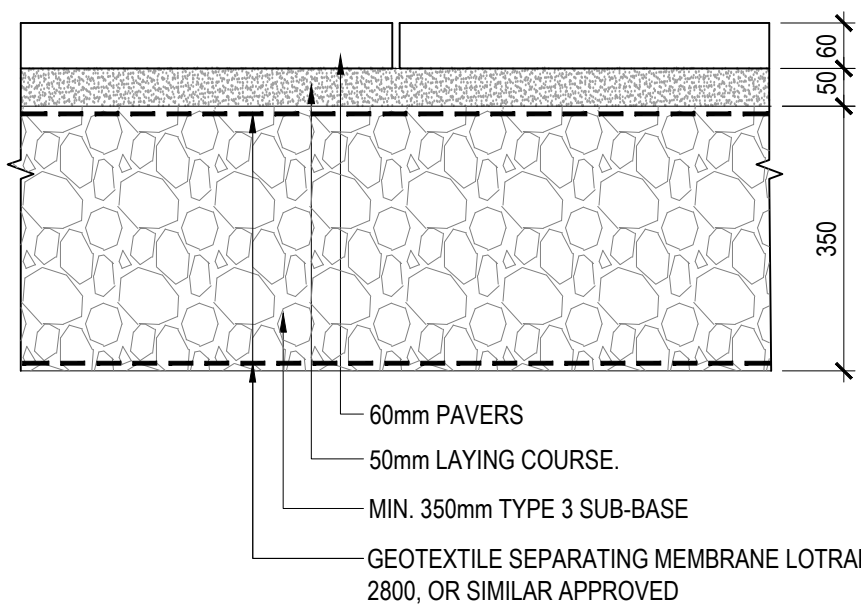
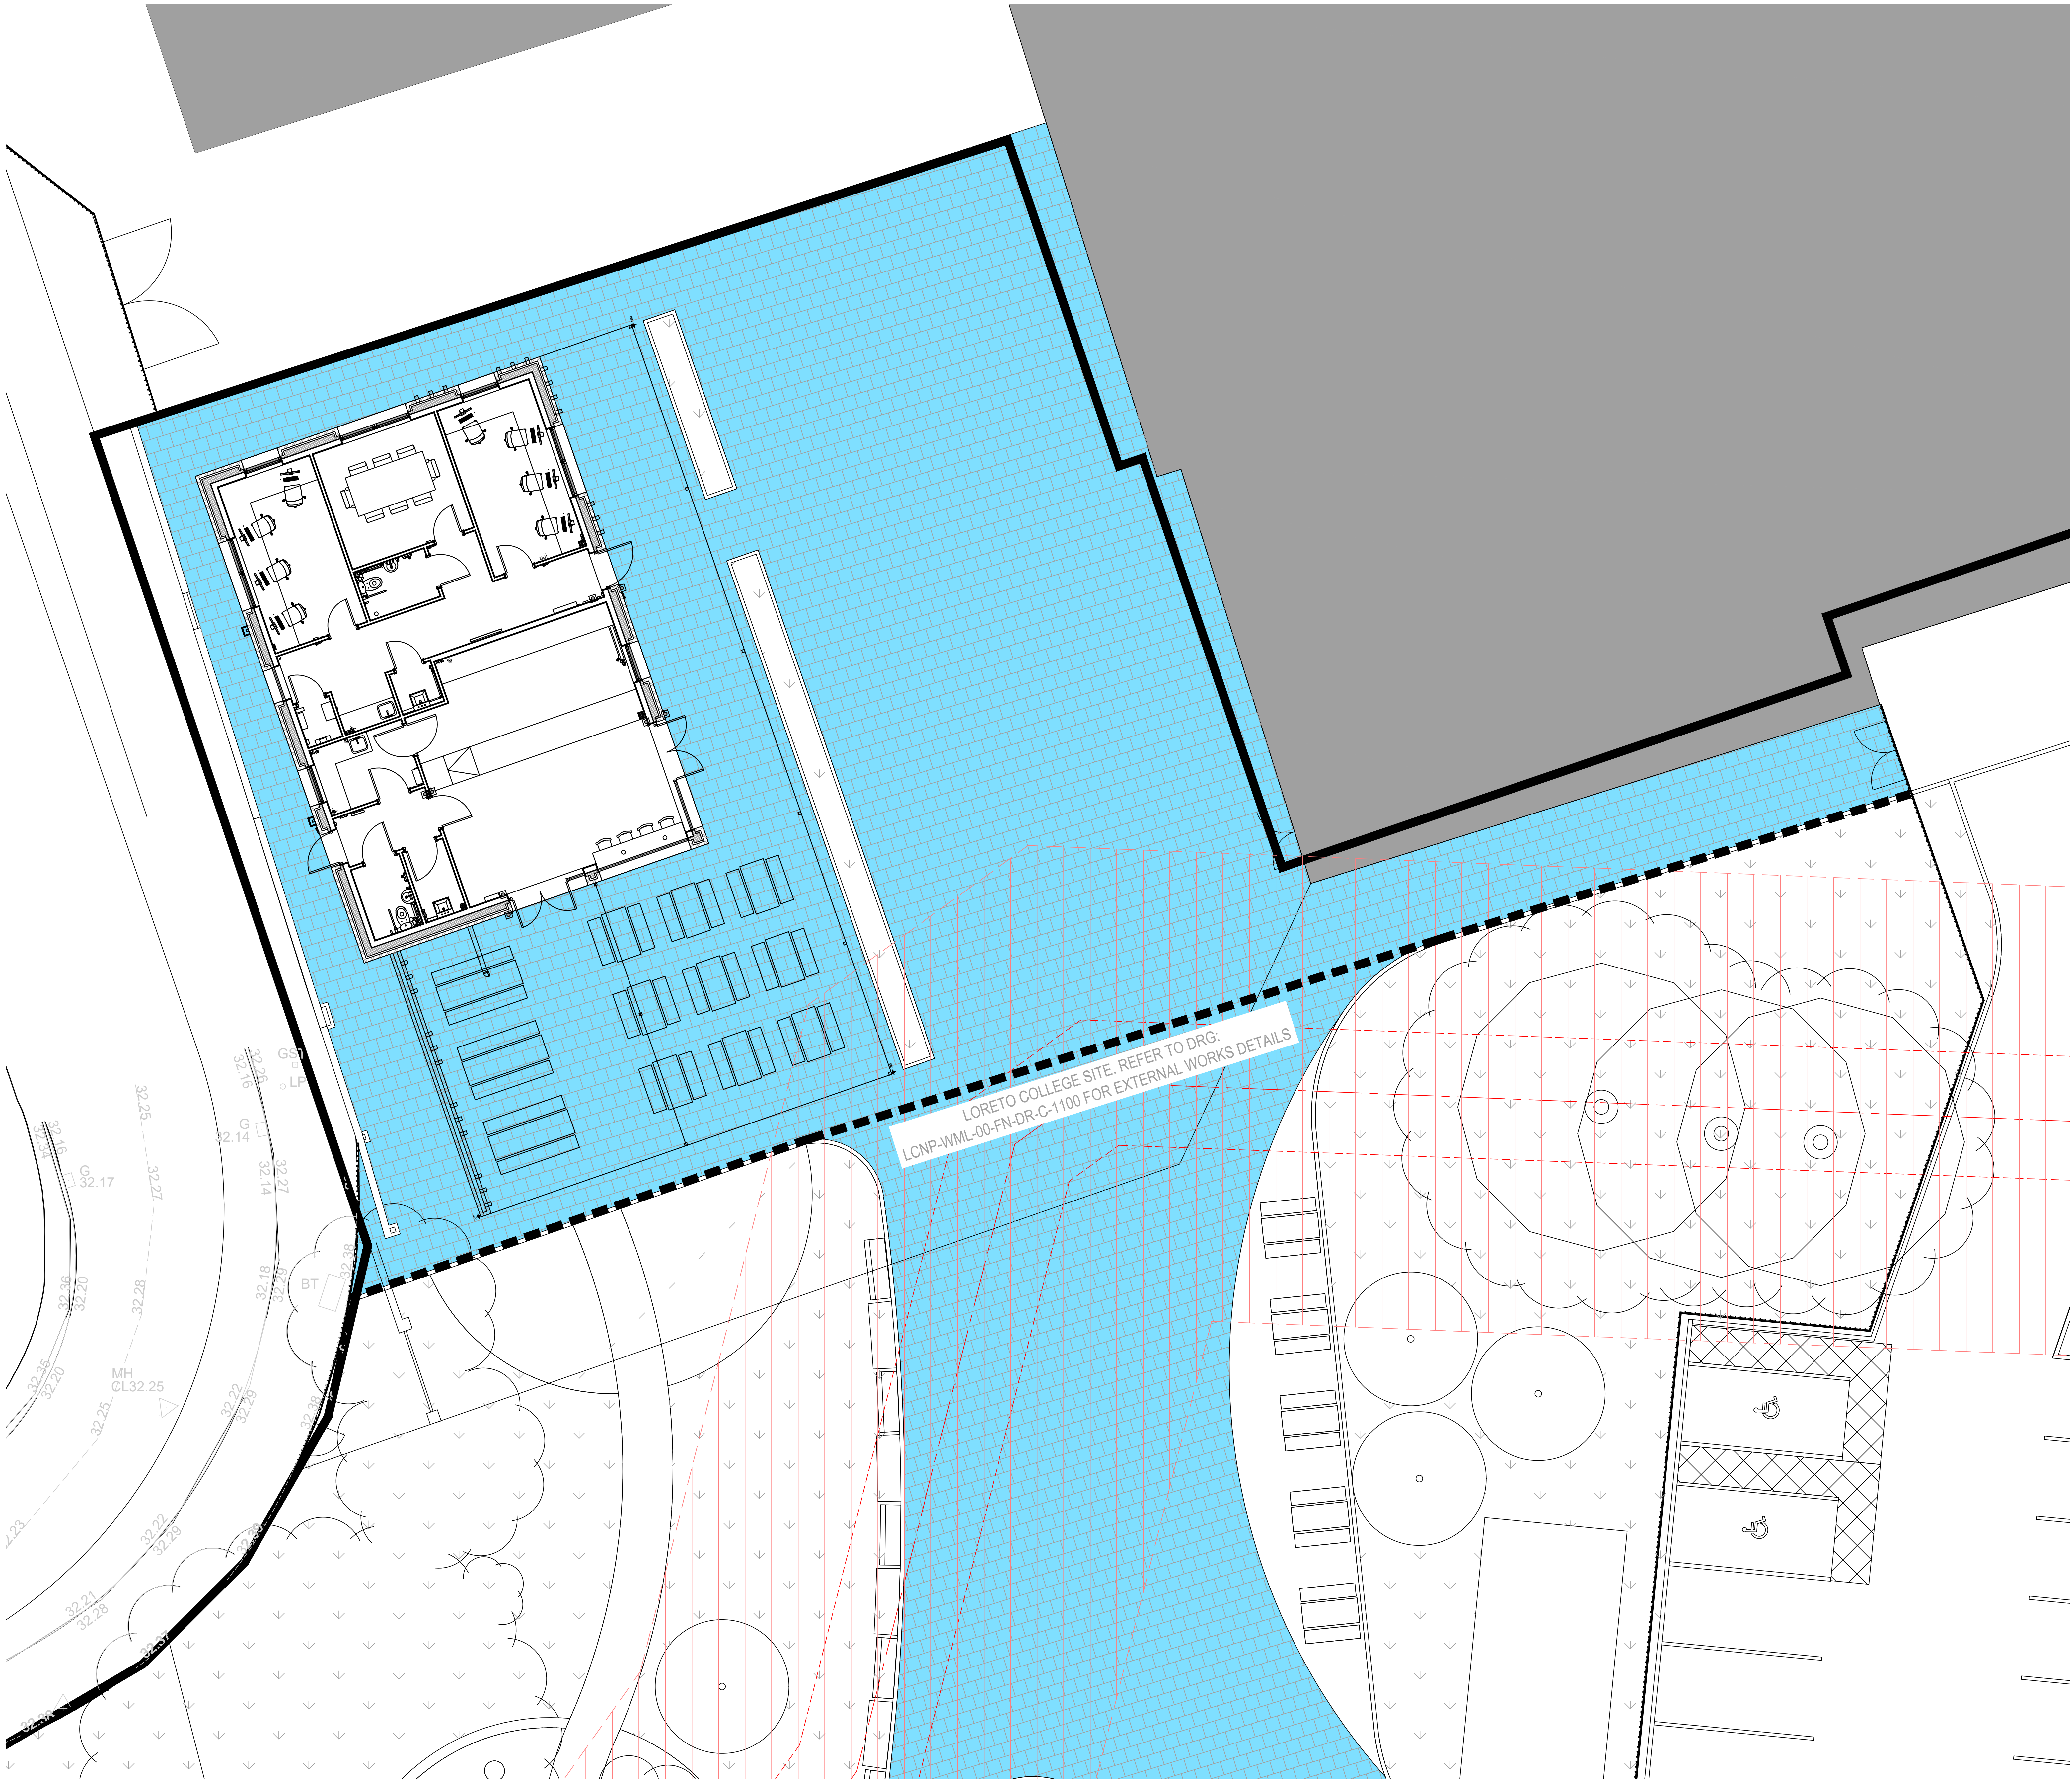




ALL WORKS TO BE IN ACCORDANCE WITH BS7533-3 GENERALLY.

PAVER: THICKNESS 60mm.
MATERIAL: AS SPECIFIED BY ARCHITECT

LAYING COURSE: THICKNESS 50mm.
MATERIAL: IN ACCORDANCE WITH Q24/455A

ROADBASE: NON REQUIRED.
MATERIAL: NA

GRANULAR SUB-BASE AS SECTION Q20 OF WML SPECIFICATION THICKNESS 350 mm (SHW803 TYPE 3 GSB - MINIMUM 30% VOID RATIO).



JOINTING: NARROW JOINTS TO ARCHITECTS DETAIL.
MATERIAL: IN ACCORDANCE WITH Q24/510A
LAYING PATTERN: AS SPECIFIED BY ARCHITECT.

ASSUMED CBR: 5% (SUBJECT TO CONFIRMATION OF CBR TESTS BY SITE INVESTIGATION SPECIALIST AFTER SITE STRIP)


ADDITIONAL FILLING REQUIRED TO RAISE SURFACE LEVEL FOLLOWING SITE STRIP TO BE IN ACCORDANCE WITH Q20. (SHW803 TYPE 3 GSB).

ALL MATERIAL WITHIN 450MM OF SURFACE LEVEL TO BE NON-FROST SUSCEPTIBLE. IF ENCOUNTERED NOTIFY WML REPLACEMENT FILL TO BE GRADE 6F2 OR 6F5 UNLESS AGREED OTHERWISE.


(NBS SPEC. Q24/111WM)
TYPICAL DETAIL
BRICK / BLOCK PAVING TO FOOTPATHS
(SCALE 1:10)

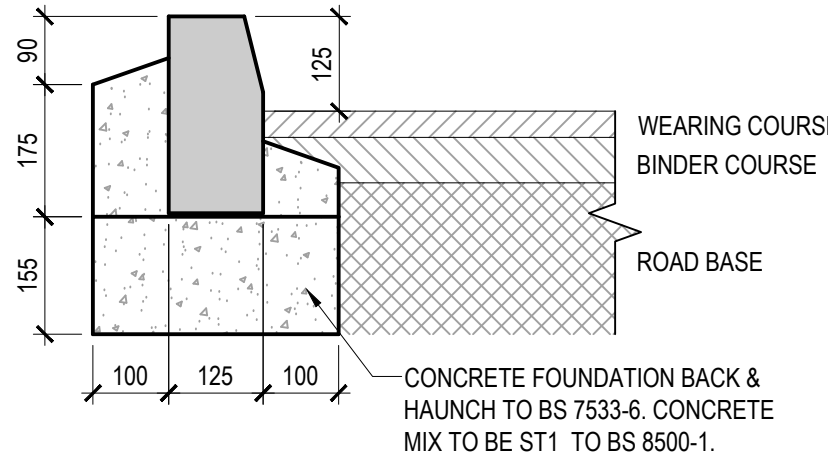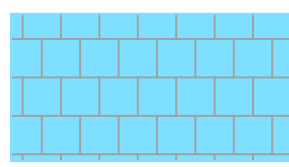

TYPICAL KERB DETAIL
(SCALE 1:10)

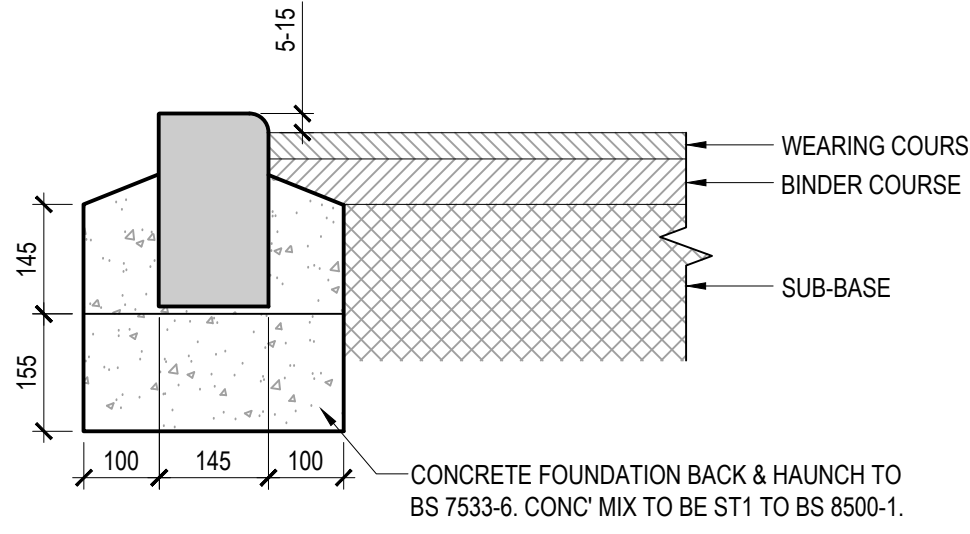

TYPICAL DROP KERB
(SCALE 1:10)

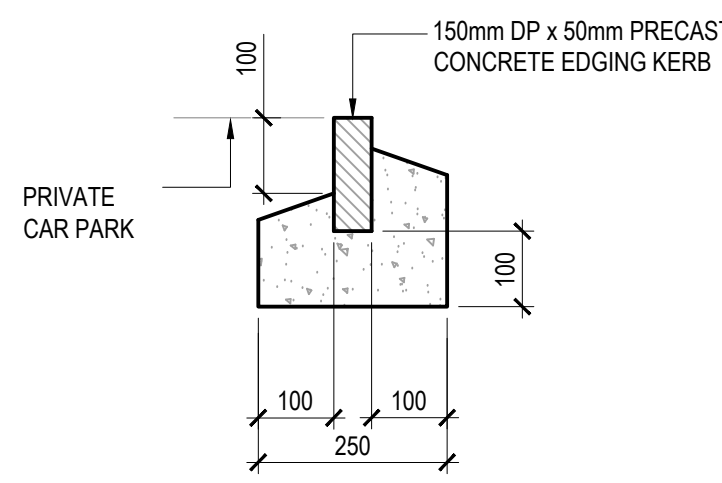


TYPICAL EDGING DROP KERB
(SCALE 1:10)

- NOTES:**
1. CONCRETE BEDDING AND BACKING SHALL BE TYPE ST1 TO BS 8500-1.
 2. KERBS SHALL COMPLY WITH BS EN 1340.
 3. CEMENT SHALL BE ORDINARY PORTLAND CEMENT TO BS EN 197-1.
 4. JOINTS TO KERBS SHALL BE POINTED WITH CLASS (iii) MORTAR.
 5. CUT LENGTHS OF KERBS ARE TO BE CUT USING A DISC CUTTER MIN. LENGTH 450mm.
 6. IN THE CASE OF NEW CARRIAGEWAY CONSTRUCTION THE SUB BASE LAYER IS EXTENDED 300mm BEYOND THE BACK OF KERB FOUNDATION THE CONTRACTOR SHALL ALLOW FOR FILLING IN BETWEEN THE ROAD SUB BASE AND THE FOOTWAY FORMATION WITH SUB BASE MATERIAL IN THE RATE FOR KERBING.
 7. RECONSTRUCTION OF EXISTING CARRIAGEWAY CHANNEL MEASURED SEPARATELY.
 8. KERBS LAID IN EXISTING CARRIAGEWAY FORMATION-RATE TO INCLUDE INFILL OF OVERBREAK IN FRONT OF KERB WITH CONCRETE TYPE ST.1 TO BINDER COURSE FINISH LEVEL.

SUBJECT TO APPROVAL FROM
LOCAL PLANNING AUTHORITY

PRELIMINARY

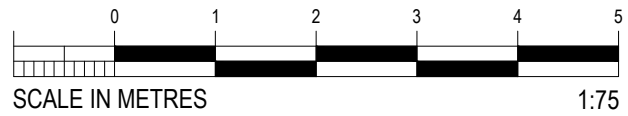

GENERAL NOTES

DO NOT SCALE FROM THIS DRAWING WORK TO FIGURED DIMENSIONS ONLY.

NO DEVIATION FROM THE DETAILS SHOWN ON THIS DRAWING IS ALLOWED WITHOUT PRIOR PERMISSION IN WRITING.

ALL DRAWINGS ARE TO BE READ IN CONJUNCTION WITH ALL ARCHITECTS, ENGINEERS AND SPECIALISTS DRAWINGS AND THE SPECIFICATION.

THE CONTRACTOR SHALL INCORPORATE ALL THE REQUIREMENTS OF THE PRE-TENDER STAGE HEALTH AND SAFETY PLAN.

Rev.	Project	Arch/Client	Title	WML Job No.	Drawn	Checked	Date	Scale
P01	ST VINCENT'S, LORETO COLLEGE	LORETO COLLEGE	PROPOSED SITE EXTERNAL WORKS GA	10939	DB	LoG	FEB 2025	1:75 @ A0
WML CONSULTING								
No 8 Oak Green East Road Barnley Green Business Park Chesham Bucks HP8 6QJ Tel: 0161 486 9200 Fax: 0161 486 9210 email: info@wmlconsulting.com www.wmlconsulting.com								
Project	Originator	Volume	Level	Type	Role	Number	Rev	
LCNP	WML	00	FN	DR	D	5238	P01	