


Before

After

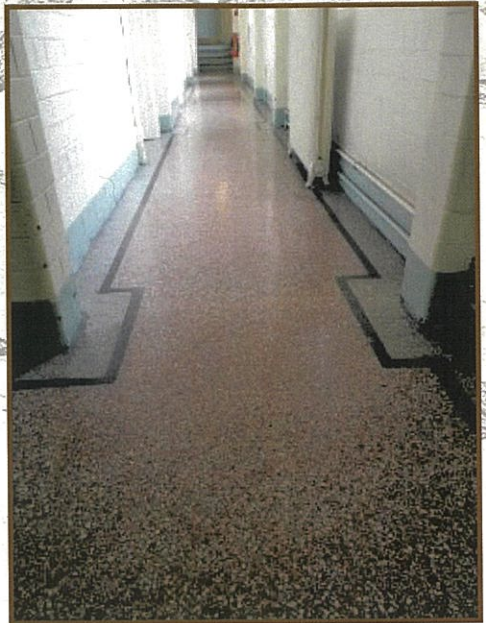

Large Crack to Corridor

Manchester University - Listed Building (office)

Rake out crack within corridor and remove loose material.

Bonding agents applied followed by new Bespoke Terrazzo Insitu compound (hand mixed on site) with colour pigmentation to match (as near as possible).

Mechanically ground using coarse/medium/fine heads.

Reseal whole area with a Saturate Solution of Zinc Silicate Flourides.

Diamond resurfaced to complete.