

Project Title:		Position A - 7.15M		Project No:	117962	Page No:	/	Rev:	A.
Calculations		Notes		Meeting Minutes	Sketch Sheet	Made by:	Checked by:	Date:	Scanned:
						JH		JAN 25	


EXISTING TIE ROD CONNECTION TO BE REINSTATED AS PER THE EXISTING ARRANGEMENTS AS A LIKE-FOR-LIKE REPLACEMENT AS AGREED WITH BH.

LOCATION A - WORST CASE DESIGN COMB.(SLS)

C/L
 $M = 6.2 \text{ kNm}$
 $V = 5 \text{ kN}$
 $N = 94.3 \text{ kN}$

2x12 NO. M16(4.6) BOLTS
 W/ 48x4mm CIRCULAR WASHERS
 (GALVANISED)

2 NO. 250x6mm THK. S275 GALVANISED PLATES, 1 EACH SIDE OF TIMBER.

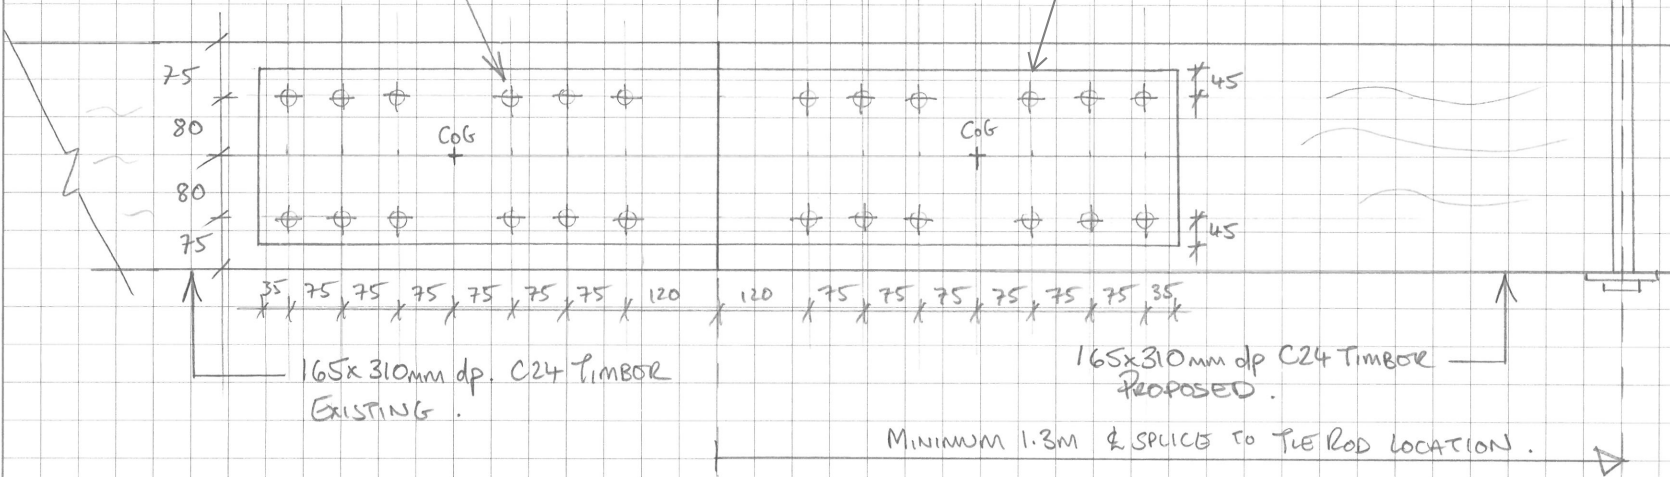

ELEVATION ON SPLICE @ POSITION A - 7.15M.

- FINAL SPLICE POSITION TBC BY OTHERS BASED ON TIMBER SURVEY/EXTENT OF DECAY
- DESIGN ASSUMES C24 TIMBER TO EXISTING AND PROPOSED, INFORM ENGINEER IF OTHERWISE.

⚠ CDM - CONTRACTOR'S TEMPORARY WORKS DESIGNER TO COORDINATE WITH LEAD ENGINEER (BURO HAPPOLD) IN CONSIDERATION OF TEMPORARY PROPPING REQUIREMENTS.

